

Features

- Low forward voltage drop
- Guard ring construction for transient Protection
- High conductance



Lead-free

HF

Typical Applications

- surface mount schottky barrier rectifier

Mechanical Data

- Case: SOD-323
- Molding compound, UL flammability classification rating 94V-0.
- Terminals: Tin plated leads, solderable per MIL-STD-202, Method 208.



SOD-323



Ordering Information

Part Number	Package	Shipping	Marking Code
B0560WS□	SOD-323	3000/Tape Reel	SS

□: none is for Lead Free package;

“G” is for Halogen Free package.

Maximum Ratings (@T_A=25°C unless otherwise specified)

Parameter	Symbol	B0560WS	Units
Peak Repetitive Reverse Voltage	V _{RRM}	60	V
RMS Reverse Voltage	V _{RMS}	42	V
Average Rectified Output Current	I _O	0.5	A
Peak Forward Surge Current, 8.3ms Single Half-sine-wave	I _{FSM}	5.5	A

Thermal Characteristics

Parameter	Symbol	B0560WS	Units
Power Dissipation	P _D	250	mW
Typical Thermal Resistance per leg	R _{θJA} *	400	°C /W
Operating Junction Temperature Range	T _J	125	°C
Storage Temperature Range	T _{STG}	-65 to +125	°C



* Part mounted on FR-4 board with recommended pad layout

Electrical Characteristics (@ $T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	Min.	Typ.	Max.	Units
Forward Voltage	V_F^*	$I_F=0.5\text{A}$	-	0.62	0.7	V
Maximum Peak Reverse Current	I_R^{**}	$V_R=60\text{V}$	-	-	100	μA
Junction Capacitance	C_J	$V_R=4\text{V}, f=1\text{MHz}$	-	30	-	pF


*Pulse width $\leq 380\text{ }\mu\text{s}$, Duty cycle $< 2\%$
 **pulse test , $t_p \leq 5\text{ms}$

Ratings and Characteristic Curves ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

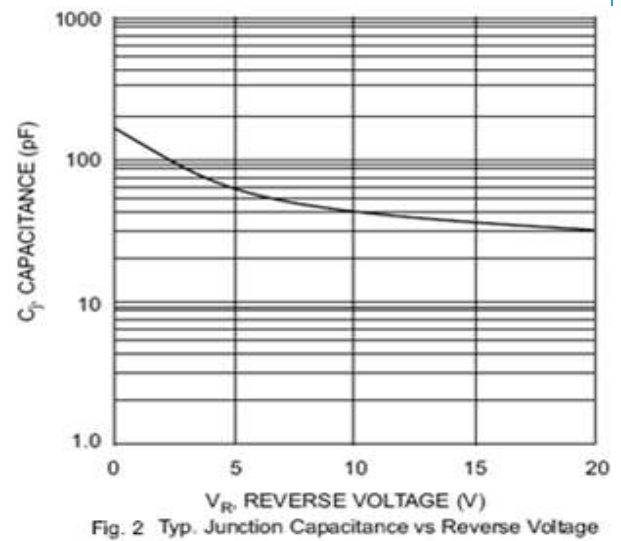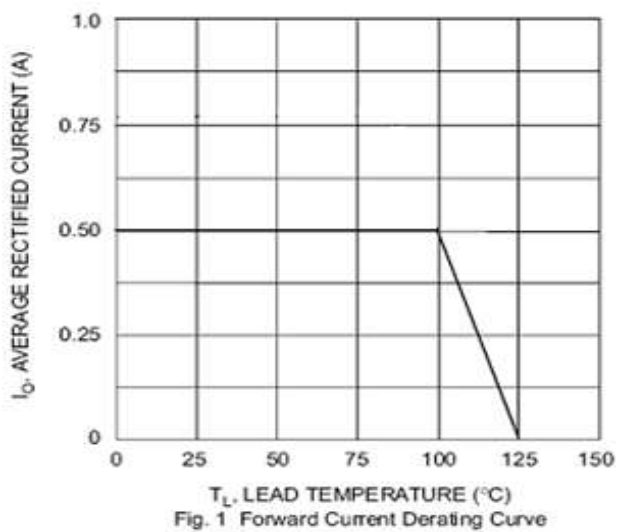

Package Outline Dimensions(unit:mm)


SOD-323

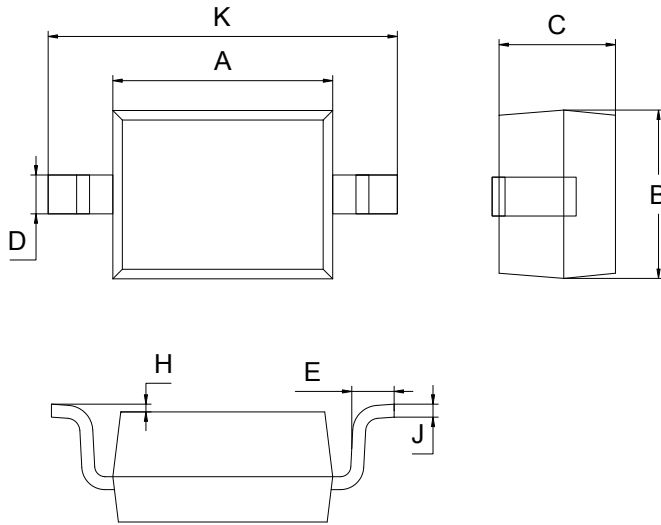

SOD-323		
Dim	Min	Max
A	1.60	1.80
B	1.20	1.40
C	0.80	0.90
D	0.25	0.35
E	0.22	0.42
H	0.02	0.10
J	0.05	0.15
K	2.55	2.75

Mounting Pad Layout(unit:mm)

SOD-323

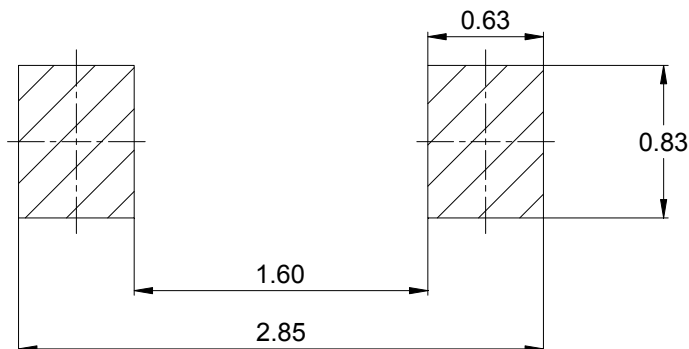

IMPORTANT NOTICE

Galaxy Microelectronics (GME) reserves the right to make changes without further notice to any product herein to make corrections, modifications , improvements , or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others .

Change record

Rev.	Date	Modification
Preliminary	2018-11-12	The First Edition 初版