

Schottky Barrier Diode

B5817WSH


FEATURES

- Extremely low V_F
- Low stored charge, majority carrier conduction
- Low power loss/high efficient
- MSL 1

HF

APPLICATIONS

- For Use In Low Voltage, High Frequency Inverters
- Free Wheeling, And Polarity Protection Applications

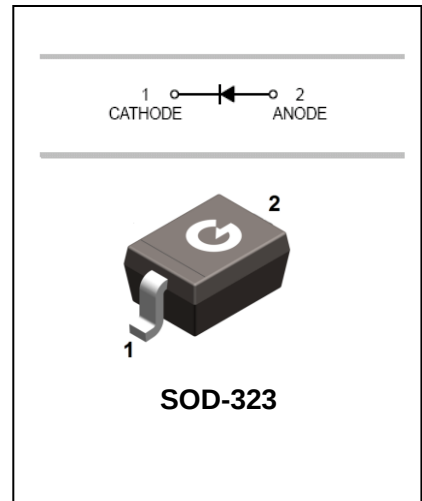

ORDERING INFORMATION

Type No.	Marking	Package Code
B5817WSH	SJH	SOD-323

MAXIMUM RATING @ $T_a=25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Value	Unit
Non-Repetitive Peak reverse voltage	V_{RM}	24	V
Peak repetitive Peak reverse voltage	V_{RRM}	20	V
Working Peak Reverse voltage	V_{RWM}		
DC Reverse Voltage	V_R		
RMS Reverse Voltage	$V_{R(RMS)}$	14	V
Average Rectified output Current	I_o	1	A
Peak forward surge current@=8.3ms	I_{FSM}	10	A
Power Dissipation	P_D	235	mW
Thermal Resistance Junction-to-Air ^{*1}	$R_{\theta JA}$	426	$^\circ\text{C/W}$
Thermal Resistance Junction-to-Case ^{*1}	$R_{\theta JC}$	230	$^\circ\text{C/W}$
Thermal Resistance Junction-to-Lead ^{*1}	$R_{\theta JL}$	297	$^\circ\text{C/W}$
Junction and Storage Temperature Range	T_J, T_{STG}	-65 to +150	$^\circ\text{C}$

Note 1: The data tested by surface mounted on a 22mm * 17mm * 1mm FR4-epoxy P.C.B

Schottky Barrier Diode

B5817WSH

ELECTRICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Test Condition	MIN	MAX	UNIT
Reverse breakdown voltage	$V_{(BR)}$	$I_R=1\text{mA}$	20		V
Reverse voltage leakage current	I_R	$V_R=20\text{V}$		1	mA
Forward voltage	V_F	$I_F=1\text{A}$ $I_F=3\text{A}$		0.50 0.75	V
Diode capacitance	C_D	$V_R=4\text{V}, f=1\text{MHz}$		120	pF

TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

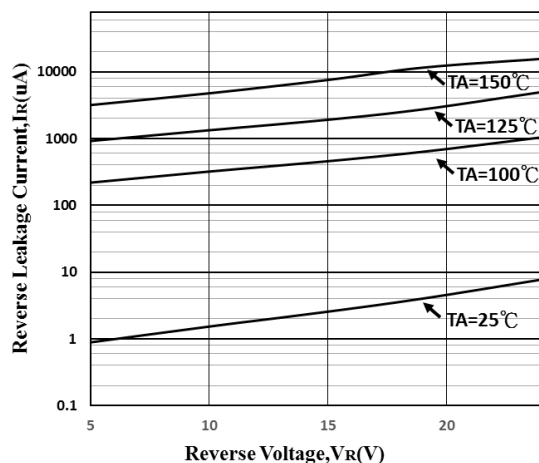


FIG 1. Typical Reverse Characteristic

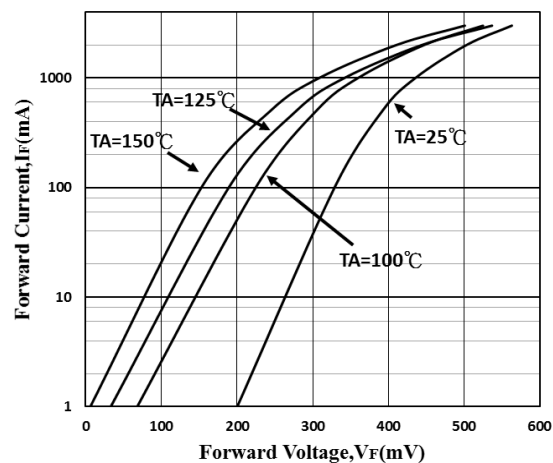


FIG 2. Typical Forward Characteristic

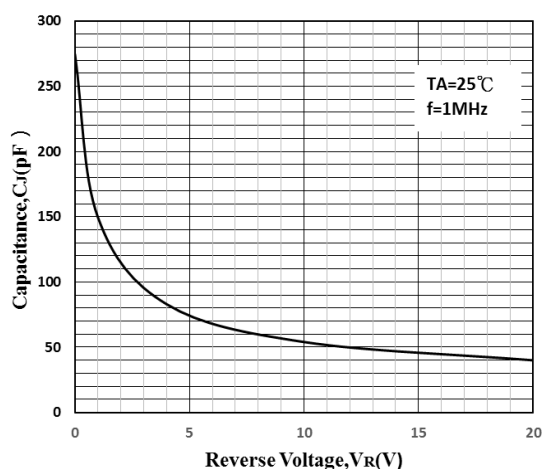


FIG 3. Capacitance vs Reverse Voltage

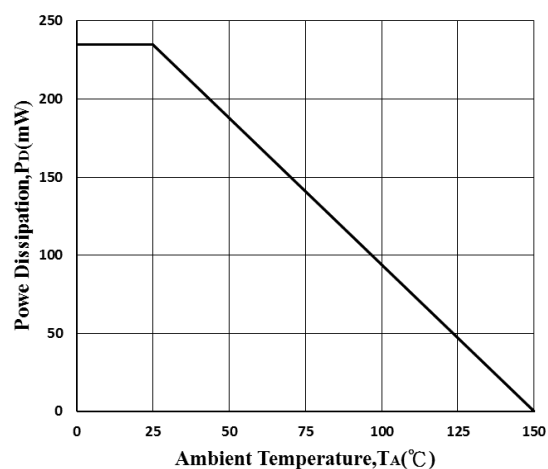


FIG 4. Power Derating Curve


Schottky Barrier Diode

B5817WSH


PACKAGE OUTLINE

Plastic surface mounted package

SOD-323

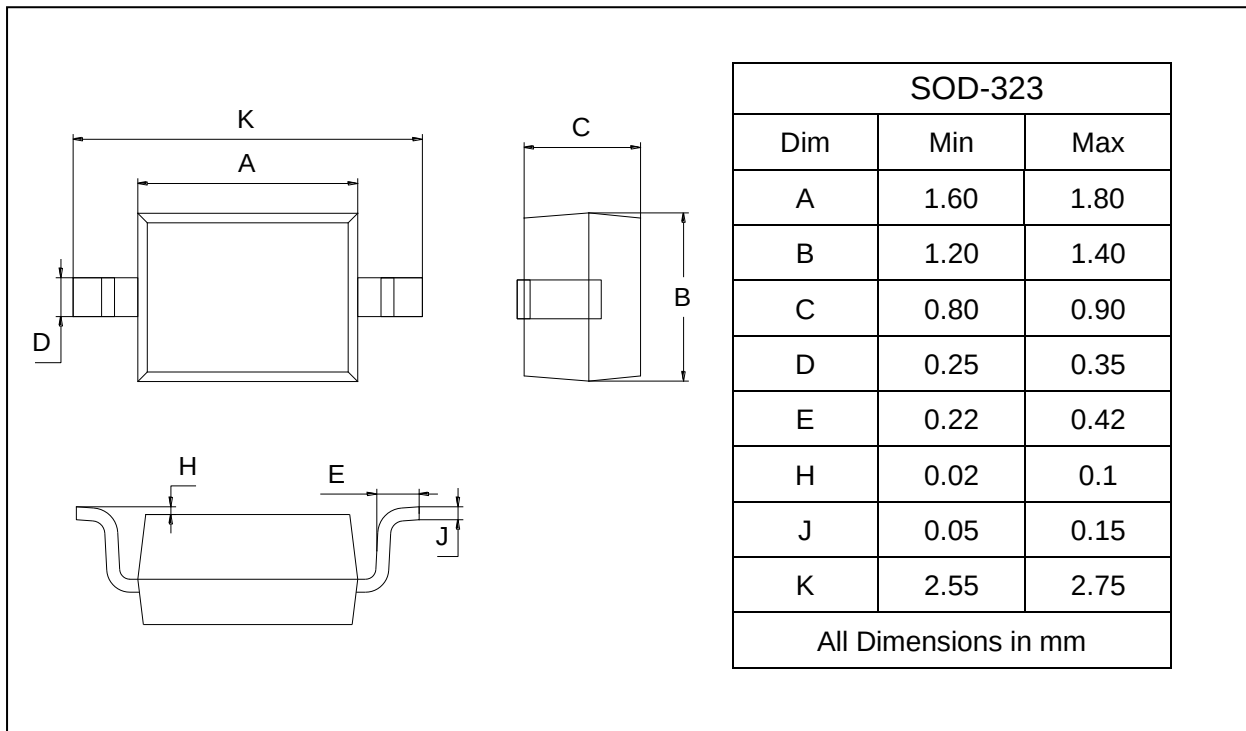

SOLDERING FOOTPRINT

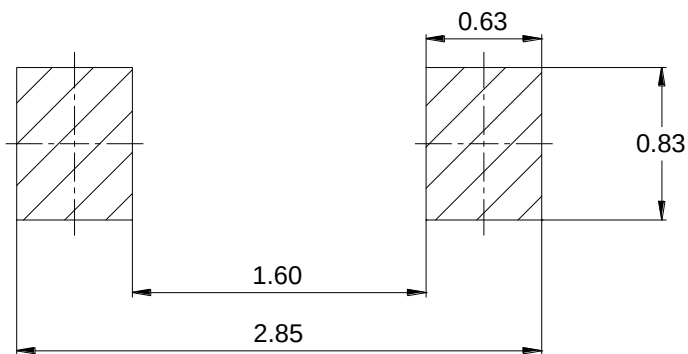

Unit: mm

PACKAGE INFORMATION

Device	Package	Shipping
B5817WSH	SOD-323	3000 pcs / Tape & Reel