

## Features

- 350 Watts peak pulse power ( $t_p = 8/20\mu s$ )
- Low clamping voltage
- Working voltage:  $V_{RWM} = 3V, 5V, 8V, 12V, 15V, 18V, 24V, 36V$
- Low reverse clamping voltage


HF

## Typical Applications

- Cell Phone Handsets and Accessories
- Microprocessor based equipment
- Portable instrumentation

## Mechanical Data

- Case: SOD-123
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208



SOD-123

## Ordering Information

| Part Number | Package | Shipping Quantity     | Marking Code |
|-------------|---------|-----------------------|--------------|
| SD03W       | SOD-123 | 3000pcs / Tape & Reel | 3U           |
| SD05W       | SOD-123 | 3000pcs / Tape & Reel | 5U           |
| SD08W       | SOD-123 | 3000pcs / Tape & Reel | 08           |
| SD12W       | SOD-123 | 3000pcs / Tape & Reel | 6U           |
| SD15W       | SOD-123 | 3000pcs / Tape & Reel | 15W          |
| SD18W       | SOD-123 | 3000pcs / Tape & Reel | 7U           |
| SD24W       | SOD-123 | 3000pcs / Tape & Reel | 8U           |
| SD36W       | SOD-123 | 3000pcs / Tape & Reel | D36          |

## Maximum Ratings (@ $T_A = 25^\circ C$ unless otherwise specified)

| Parameter                              | Symbol      | Value    | Unit |
|----------------------------------------|-------------|----------|------|
| IEC 61000-4-2; ESD (Air)               | $V_{ESD-A}$ | $\pm 30$ | kV   |
| IEC 61000-4-2; ESD (Contact)           | $V_{ESD-C}$ | $\pm 30$ | kV   |
| Peak Pulse Power ( $t_p = 8/20\mu s$ ) | $P_{PP}$    | 350      | W    |

### Thermal Characteristics

| Parameter                                     | Symbol    | Value       | Unit               |
|-----------------------------------------------|-----------|-------------|--------------------|
| Lead Solder Temperature (10 Seconds Duration) | $T_L$     | 260         | $^{\circ}\text{C}$ |
| Junction Temperature                          | $T_J$     | 125         | $^{\circ}\text{C}$ |
| Storage Temperature Range                     | $T_{STG}$ | -55 to +150 | $^{\circ}\text{C}$ |

### Electrical Characteristics (@ $T_A = 25^{\circ}\text{C}$ unless otherwise specified)

| Parameter                      | Symbol     | Test Condition                                  | Min. | Typ. | Max. | Unit          |
|--------------------------------|------------|-------------------------------------------------|------|------|------|---------------|
| <b>SD03W TVS for 3V Lines</b>  |            |                                                 |      |      |      |               |
| Reverse Stand-off Voltage      | $V_{RWM}$  |                                                 | -    | -    | 3    | V             |
| Reverse Breakdown Voltage      | $V_{(BR)}$ | $I_T = 1\text{mA}$                              | 4    | -    | 6.5  | V             |
| Reverse Leakage Current        | $I_R$      | $V_{RWM} = 3\text{V}$                           | -    | -    | 10   | $\mu\text{A}$ |
| Clamping Voltage               | $V_C$      | $I_{PP} = 1\text{A}$ , $t_p = 8/20\mu\text{s}$  | -    | -    | 7    | V             |
|                                |            | $I_{PP} = 25\text{A}$ , $t_p = 8/20\mu\text{s}$ | -    | -    | 13.5 | V             |
| Junction Capacitance           | $C_J$      | $V_R = 0\text{V}$ , $f = 1\text{MHz}$           | -    | -    | 400  | pF            |
| <b>SD05W TVS for 5V Lines</b>  |            |                                                 |      |      |      |               |
| Reverse Stand-off Voltage      | $V_{RWM}$  |                                                 | -    | -    | 5    | V             |
| Reverse Breakdown Voltage      | $V_{(BR)}$ | $I_T = 1\text{mA}$                              | 6    | -    | -    | V             |
| Reverse Leakage Current        | $I_R$      | $V_{RWM} = 5\text{V}$                           | -    | -    | 1    | $\mu\text{A}$ |
| Clamping Voltage               | $V_C$      | $I_{PP} = 5\text{A}$ , $t_p = 8/20\mu\text{s}$  | -    | -    | 9.8  | V             |
|                                |            | $I_{PP} = 24\text{A}$ , $t_p = 8/20\mu\text{s}$ | -    | -    | 14.5 | V             |
| Junction Capacitance           | $C_J$      | $V_R = 0\text{V}$ , $f = 1\text{MHz}$           | -    | -    | 350  | pF            |
| <b>SD08W TVS for 8V Lines</b>  |            |                                                 |      |      |      |               |
| Reverse Stand-off Voltage      | $V_{RWM}$  |                                                 | -    | -    | 8    | V             |
| Reverse Breakdown Voltage      | $V_{(BR)}$ | $I_T = 1\text{mA}$                              | 8.5  | -    | -    | V             |
| Reverse Leakage Current        | $I_R$      | $V_{RWM} = 8\text{V}$                           | -    | -    | 1    | $\mu\text{A}$ |
| Clamping Voltage               | $V_C$      | $I_{PP} = 1\text{A}$ , $t_p = 8/20\mu\text{s}$  | -    | -    | 12   | V             |
|                                |            | $I_{PP} = 20\text{A}$ , $t_p = 8/20\mu\text{s}$ | -    | -    | 18   | V             |
| Junction Capacitance           | $C_J$      | $V_R = 0\text{V}$ , $f = 1\text{MHz}$           | -    | -    | 200  | pF            |
| <b>SD12W TVS for 12V Lines</b> |            |                                                 |      |      |      |               |
| Reverse Stand-off Voltage      | $V_{RWM}$  |                                                 | -    | -    | 12   | V             |
| Reverse Breakdown Voltage      | $V_{(BR)}$ | $I_T = 1\text{mA}$                              | 13.3 | -    | -    | V             |
| Reverse Leakage Current        | $I_R$      | $V_{RWM} = 12\text{V}$                          | -    | -    | 1    | $\mu\text{A}$ |
| Clamping Voltage               | $V_C$      | $I_{PP} = 5\text{A}$ , $t_p = 8/20\mu\text{s}$  | -    | -    | 19   | V             |
|                                |            | $I_{PP} = 15\text{A}$ , $t_p = 8/20\mu\text{s}$ | -    | -    | 23   | V             |
| Junction Capacitance           | $C_J$      | $V_R = 0\text{V}$ , $f = 1\text{MHz}$           | -    | -    | 150  | pF            |

| SD15W TVS for 15V Lines   |            |                                 |      |   |     |         |
|---------------------------|------------|---------------------------------|------|---|-----|---------|
| Reverse Stand-off Voltage | $V_{RWM}$  |                                 | -    | - | 15  | V       |
| Reverse Breakdown Voltage | $V_{(BR)}$ | $I_T = 1mA$                     | 16.7 | - | -   | V       |
| Reverse Leakage Current   | $I_R$      | $V_{RWM} = 15V$                 | -    | - | 1   | $\mu A$ |
| Clamping Voltage          | $V_C$      | $I_{PP} = 5A, t_p = 8/20\mu s$  | -    | - | 27  | V       |
|                           |            | $I_{PP} = 10A, t_p = 8/20\mu s$ | -    | - | 40  | V       |
| Junction Capacitance      | $C_J$      | $V_R = 0V, f = 1MHz$            | -    | - | 100 | pF      |
| SD18W TVS for 18V Lines   |            |                                 |      |   |     |         |
| Reverse Stand-off Voltage | $V_{RWM}$  |                                 | -    | - | 18  | V       |
| Reverse Breakdown Voltage | $V_{(BR)}$ | $I_T = 1mA$                     | 20   | - | -   | V       |
| Reverse Leakage Current   | $I_R$      | $V_{RWM} = 18V$                 | -    | - | 1   | $\mu A$ |
| Clamping Voltage          | $V_C$      | $I_{PP} = 1A, t_p = 8/20\mu s$  | -    | - | 29  | V       |
|                           |            | $I_{PP} = 9A, t_p = 8/20\mu s$  | -    | - | 40  | V       |
| Junction Capacitance      | $C_J$      | $V_R = 0V, f = 1MHz$            | -    | - | 80  | pF      |
| SD24W TVS for 24V Lines   |            |                                 |      |   |     |         |
| Reverse Stand-off Voltage | $V_{RWM}$  |                                 | -    | - | 24  | V       |
| Reverse Breakdown Voltage | $V_{(BR)}$ | $I_T = 1mA$                     | 26.3 | - | 31  | V       |
| Reverse Leakage Current   | $I_R$      | $V_{RWM} = 24V$                 | -    | - | 1   | $\mu A$ |
| Clamping Voltage          | $V_C$      | $I_{PP} = 1A, t_p = 8/20\mu s$  | -    | - | 42  | V       |
|                           |            | $I_{PP} = 6A, t_p = 8/20\mu s$  | -    | - | 56  | V       |
| Junction Capacitance      | $C_J$      | $V_R = 0V, f = 1MHz$            | -    | - | 70  | pF      |
| SD36W TVS for 36V Lines   |            |                                 |      |   |     |         |
| Reverse Stand-off Voltage | $V_{RWM}$  |                                 | -    | - | 36  | V       |
| Reverse Breakdown Voltage | $V_{(BR)}$ | $I_T = 1mA$                     | 39   | - | 45  | V       |
| Reverse Leakage Current   | $I_R$      | $V_{RWM} = 36V$                 | -    | - | 200 | nA      |
| Clamping Voltage          | $V_C$      | $I_{PP} = 1A, t_p = 8/20\mu s$  | -    | - | 55  | V       |
|                           |            | $I_{PP} = 5A, t_p = 8/20\mu s$  | -    | - | 65  | V       |
| Junction Capacitance      | $C_J$      | $V_R = 0V, f = 1MHz$            | -    | - | 40  | pF      |

**Ratings and Characteristic Curves** (@  $T_A = 25^\circ\text{C}$  unless otherwise specified)

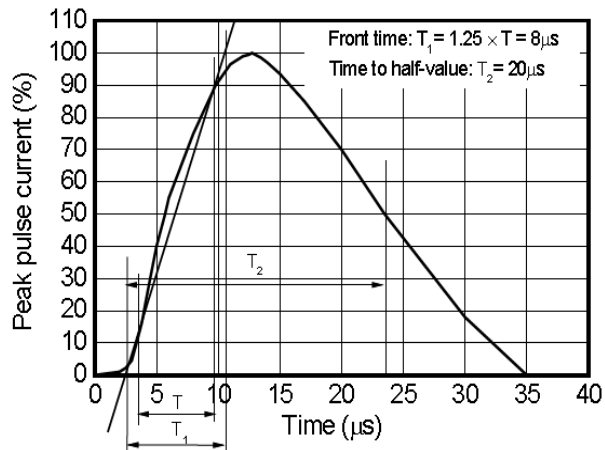


Fig 1 8/20  $\mu\text{s}$  waveform per IEC61000-4-5

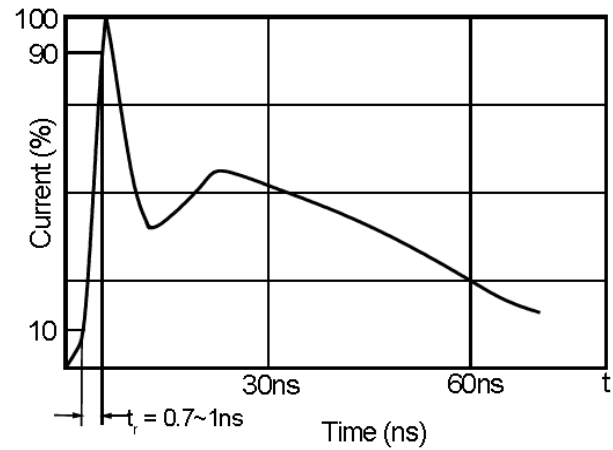


Fig 2 ESD pulse waveform according to  
IEC61000-4-2


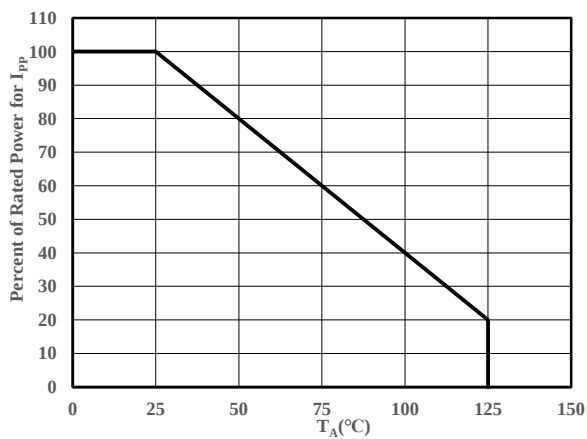


Fig 3 Power Derating Curve


## Package Outline Dimensions (Unit: mm)

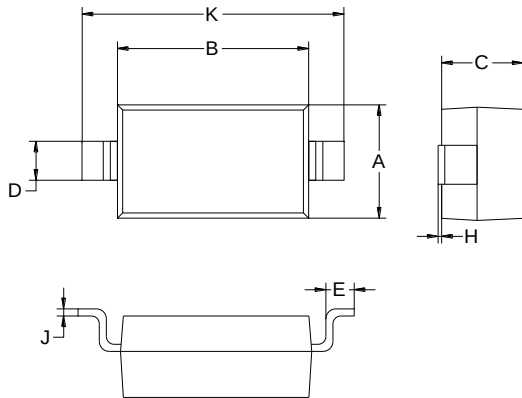

| SOD-123   |      |      |
|-----------|------|------|
| Dimension | Min. | Max. |
| A         | 1.45 | 1.75 |
| B         | 2.55 | 2.85 |
| C         | 1.00 | 1.30 |
| D         | 0.50 | 0.60 |
| E         | 0.25 | 0.45 |
| H         | 0.02 | 0.10 |
| J         | 0.05 | 0.15 |
| K         | 3.55 | 3.85 |

## Package Outline Dimensions (Unit: mm)

### SOD-123

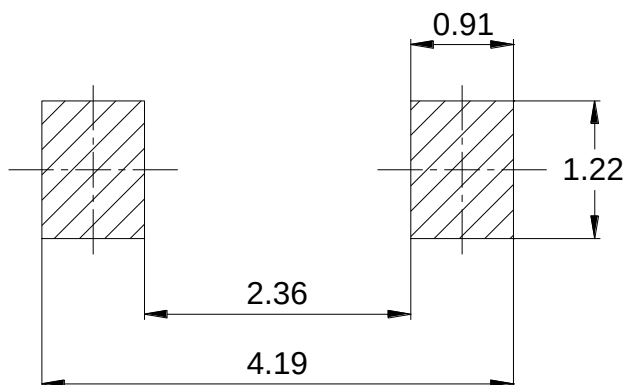

## IMPORTANT NOTICE

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.