



Features

- Low capacitance.
- High switching speed.
- Low leakage current.
- Small and flat lead SMD plastic package.
- Flat leads: excellent coplanarity and improved Thermal behavior.

HF

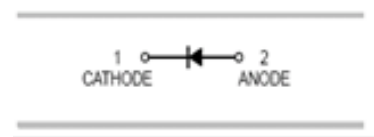

SOD-123

Typical Applications

- Ultra high-speed switching.
- Voltage clamping.

Mechanical Data

- Case: SOD-123
- Terminals: solderable per MIL-STD-202, Method 208.

Ordering Information

Part Number	Package	Shipping	Marking Code
BAS40H	SOD-123	3000 pcs / Tape & Reel	AJ

Maximum Ratings (@T_A=25°C unless otherwise specified)

Parameter	Symbol	Limits	Unit
Peak Repetitive Reverse Voltage	V _{RRM}	40	V
Working Peak Reverse Voltage	V _{RWM}		
DC Reverse Voltage	V _R		
Forward Continuous Current *	I _F	200	mA
Peak Forward Surge Current@8.3ms	I _{FSM}	600	mA
Power Dissipation *	P _D	375	mW

* part mounted on FR-4 board with recommended pad layout

Thermal Characteristics

Parameter	Symbol	Limits	Unit
Thermal Resistance Junction to Ambient Air	$R_{\theta JA}$	267	$^{\circ}\text{C/W}$
Operating Junction Temperature Range	T_j	-55 to +125	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150	$^{\circ}\text{C}$





Electrical Characteristics (@ $T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward Voltage	V_F	$I_F=1\text{mA}$			0.38	V
		$I_F=40\text{mA}$			1	V
Reverse Current	I_R	$V_R=30\text{V}$			1	μA
		$V_R=40\text{V}$			10	μA
Diode Capacitance	C_T	$V_R=0\text{V}, f=1\text{MHz}$		2.5	5	pF
Reverse Recovery Time	t_{rr}	$I_F=I_R=10\text{mA}$ $I_{rr}=1.0\text{mA}, R_L=100\Omega$			5	ns

*1: pulse test, $t_p \leq 300\mu\text{s}$


*2: pulse test, $t_p \leq 5\text{ms}$

Ratings and Characteristic Curves ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

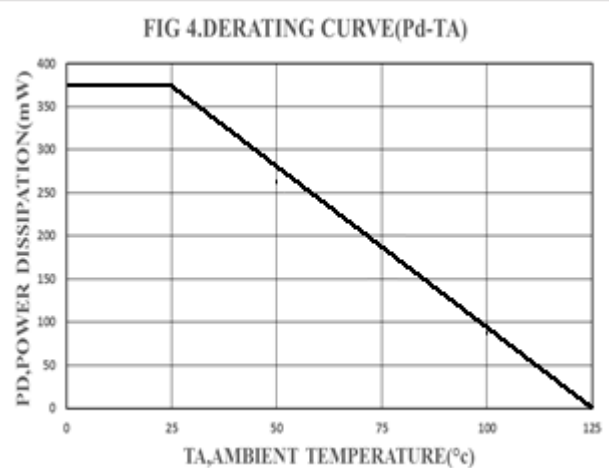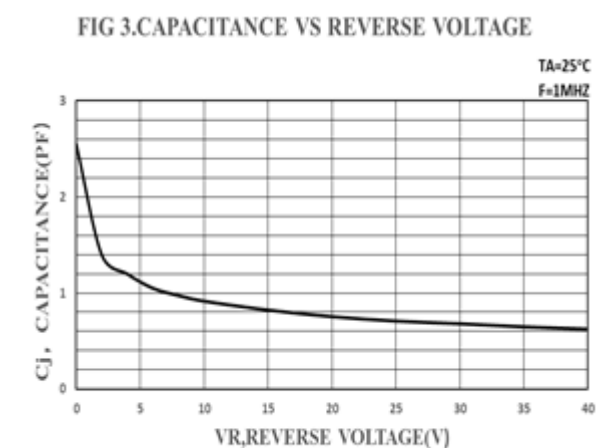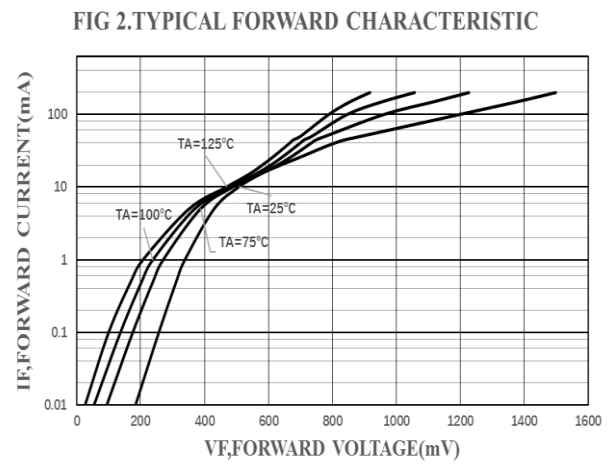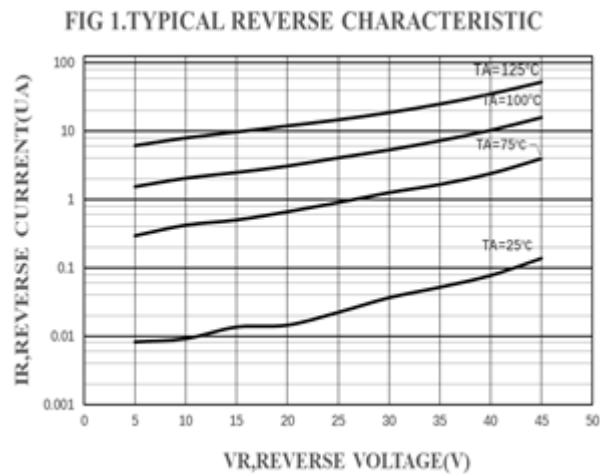

Package Outline Dimensions(unit:mm)


SOD-123

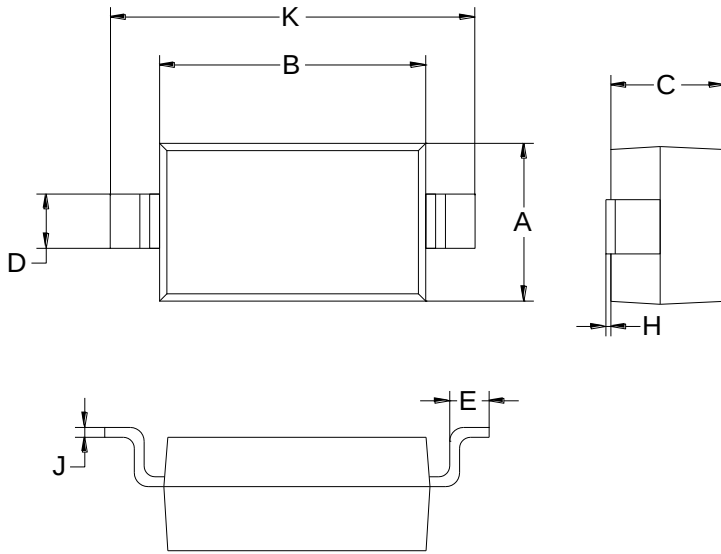

SOD-123		
Dim	Min	Max
A	1.45	1.75
B	2.55	2.85
C	1.00	1.30
D	0.50	0.60
E	0.25	0.45
H	0.02	0.10
J	0.05	0.15
K	3.55	3.85

Mounting Pad Layout(unit:mm)

SOD-123

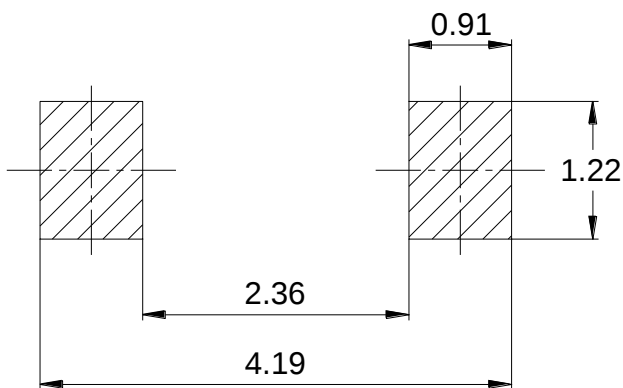

IMPORTANT NOTICE

Galaxy Microelectronics (GME) reserves the right to make changes without further notice to any product herein to make corrections, modifications , improvements , or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others .