

Features


- Fast switching speed
- Low turn-on voltage

Typical Applications

- High speed switching application
- Circuit protecting
- Voltage clamping

Mechanical Data

- Case: SOT-563
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208



SOT-563

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
BAS40V□	SOT-563	3000pcs / Tape & Reel	43

Note for □: none is for Lead-free package
"G" is for Halogen Free package

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Repetitive Peak Reverse Voltage	V _{RRM}	40	V
Working Peak Reverse Voltage	V _{RWM}		
DC Blocking Voltage	V _R		
Forward Continuous Current	I _F	200	mA
Peak Forward Surge Current, 1μs Single Half-sine-wave	I _{FSM}	0.6	A
Power Dissipation	P _D	150	mW





Thermal Characteristics

Parameter	Symbol	Value	Unit
Thermal Resistance Junction-to-Air	R _{θJA}	667	°C/W
Operating Junction Temperature Range	T _J	125	°C
Storage Temperature Range	T _{STG}	-65 ~ +150	°C


Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage	V_R	$I_R = 10\mu\text{A}$	40	-	-	V
Forward Voltage	V_F	$I_F = 1.0\text{mA}$ $I_F = 40\text{mA}$	-	-	0.38 1	V
Maximum Peak Reverse Current	I_R	$V_R = 30\text{V}$	-	-	200	nA
Total Capacitance	C_J	$V_R = 0, f = 1.0\text{MHz}$	-	-	5	pF
Reverse Recovery Time	t_{rr}	$I_F = I_R = 10\text{mA}$, $I_{rr} = 0.1 \times I_R, R_L = 100\Omega$	-	-	5	ns

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

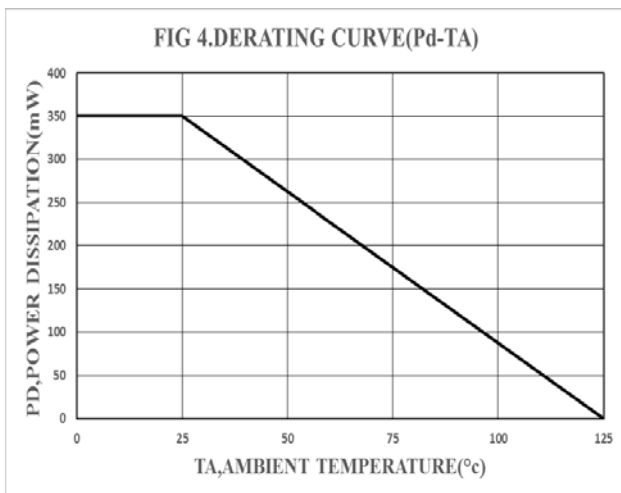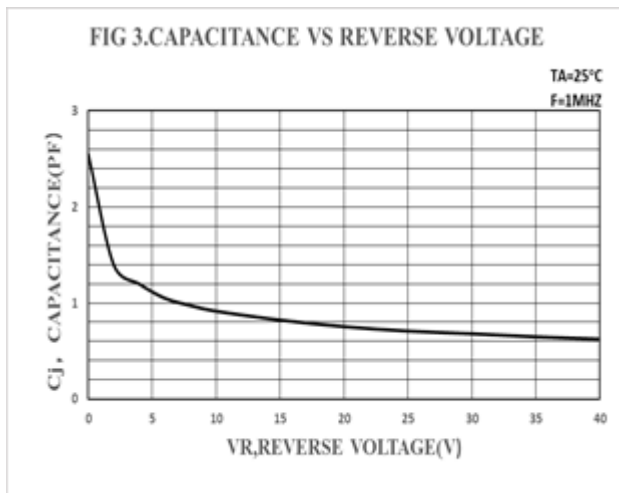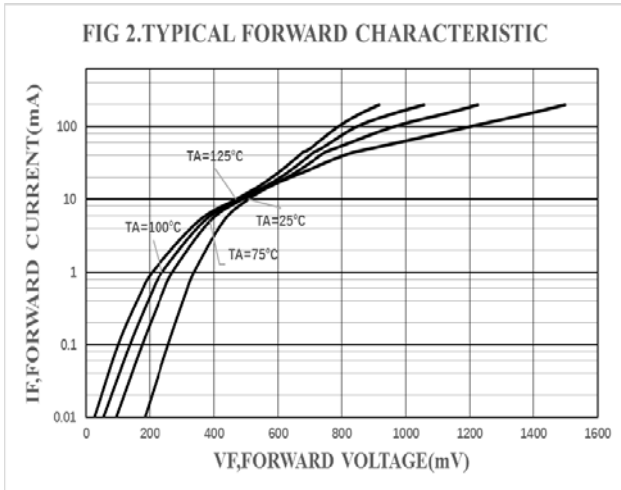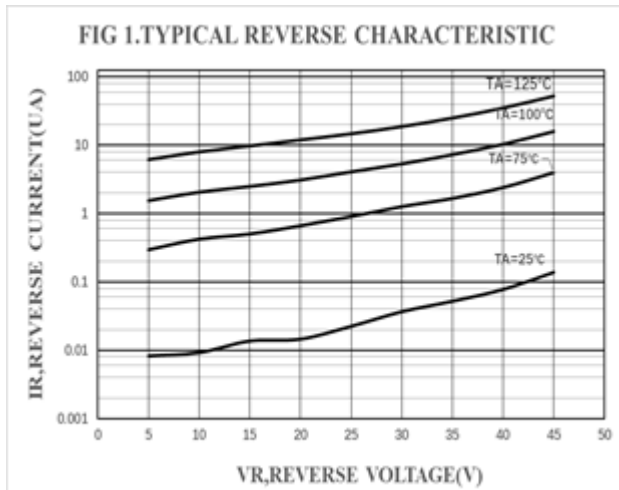


Package Outline Dimensions (Unit: mm)

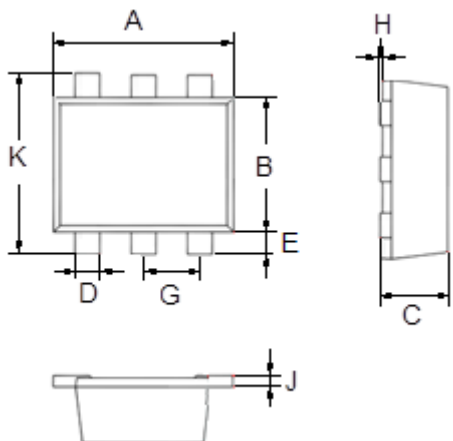

SOT-563		
Dimension	Min.	Max.
A	1.500	1.700
B	1.100	1.300
C	0.525	0.600
D	0.170	0.270
E	0.100	0.300
G	0.450	0.550
H	0.000	0.050
J	0.090	0.160
K	1.500	1.700

Package Outline Dimensions (Unit: mm)

SOT-563

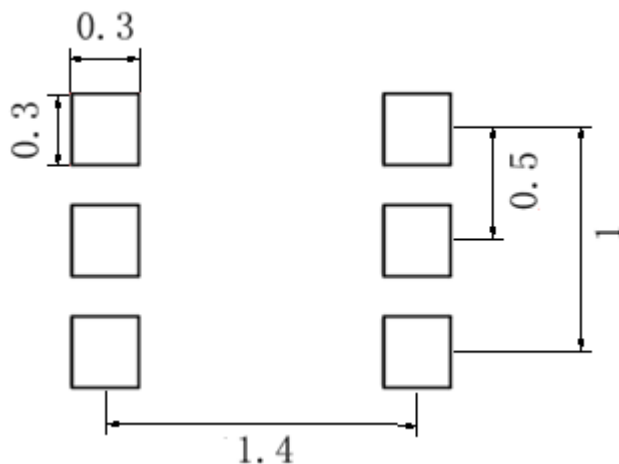

Important Notice

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.