

Features

- Very low conduction losses.
- Negligible switching losses.
- Low forward and reverse recovery times.
- Extremely fast switching.
- Surface mount device.
- Low capacitance diode.


HF

Typical Applications

- Schottky barrier switching.

Mechanical Data

- Case: SOD-323 , SOD-523
- Terminals: Tin plated leads, solderable per MIL-STD-202, Method 208.



Ordering Information

Part Number	Package	Shipping	Marking Code
BAT30	SOD-323	3000 pcs / Tape Reel	30
BAT30K	SOD-523	3000 pcs / Tape Reel	30

Maximum Ratings (@T_A=25°C unless otherwise specified)

Parameter	Symbol	Value	Units
Working Peak Reverse Voltage	V _{RRM}	30	V
Continuous forward current	I _F	300	mA
Non-Repetitive Peak Forward Surge Current @t=10 ms	I _{FSM}	1.0	A

Thermal Characteristics

Parameter	Symbol	Limits	Units
Power Dissipation	P _D	150	mW
Typical Thermal Resistance per leg	R _{θJA} *	667	°C/W
Operating Junction Temperature Range	T _J	-40 to +125	°C
Storage Temperature Range	T _{STG}	-40 to +150	°C

* Part mounted on FR-4 board with recommended pad layout





Electrical Characteristics (@T_A=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min.	Typ.	Max.	Units
Forward Voltage	V _F *	I _F =0.1mA	-	-	0.24	V
		I _F =1mA	-	-	0.30	
		I _F =10mA	-	-	0.375	
		I _F =30mA	-	-	0.43	
		I _F =100mA	-	-	0.50	
		I _F =200mA	-	-	0.58	
Reverse Current	I _R **	V _R = 5V	-	-	0.5	uA
		V _R = 10V	-	-	1	
		V _R = 25V	-	-	3	
		V _R = 30V	-	-	5	
Capacitance between terminals	C _T	V _R =0V, f=1MHz	-	22	25	pF

*Pulse width ≤380 uS, Duty cycle < 2%


**pulse test , t_p≤5ms

Ratings and Characteristic Curves (T_A=25°C unless otherwise noted)

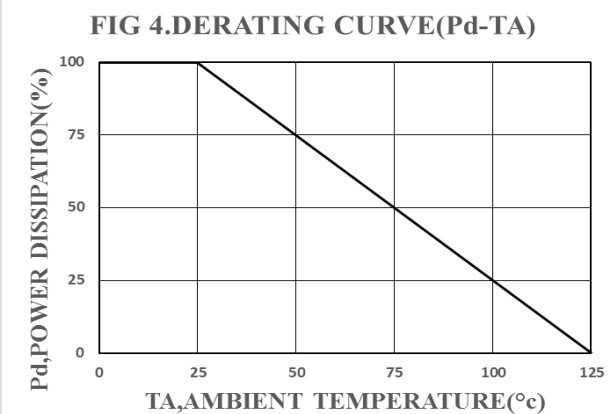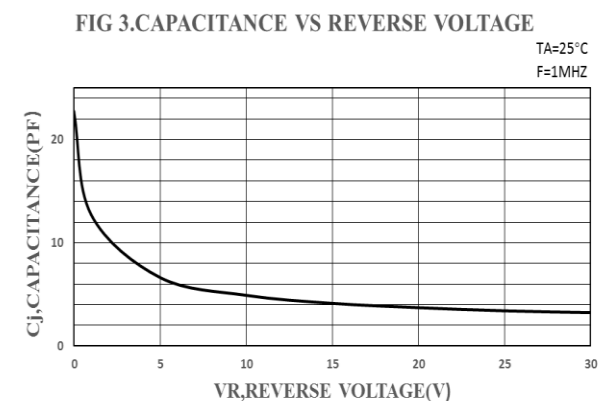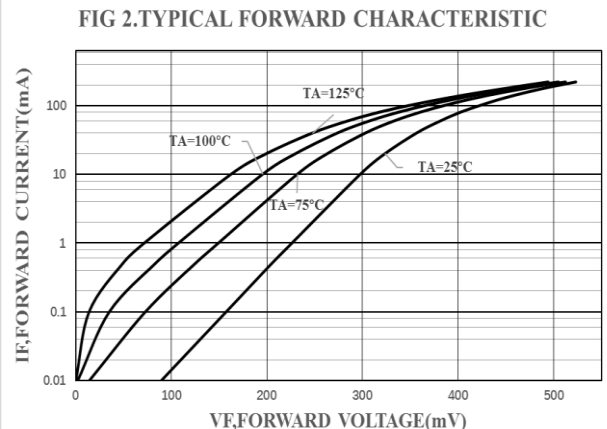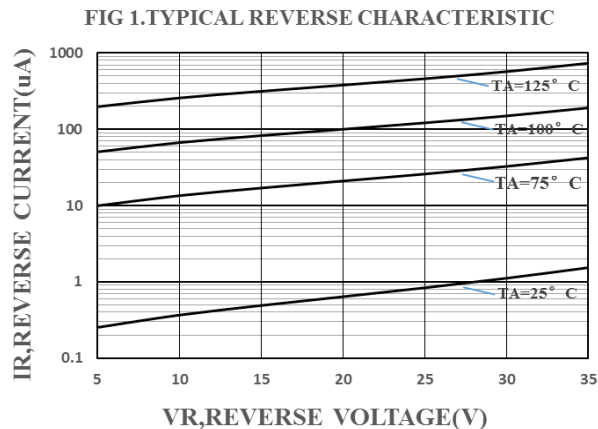


Package Outline Dimensions(unit:mm)

SOD-323

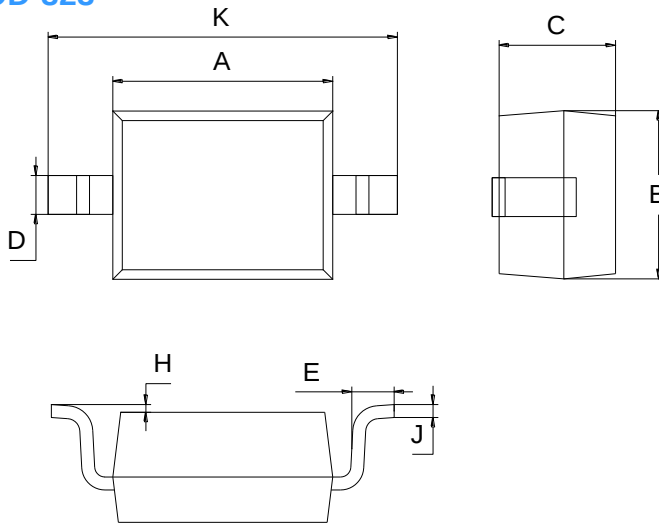

SOD-323		
Dim	Min	Max
A	1.60	1.80
B	1.20	1.40
C	0.80	0.90
D	0.25	0.35
E	0.22	0.42
H	0.02	0.10
J	0.05	0.15
K	2.55	2.75


SOD-523

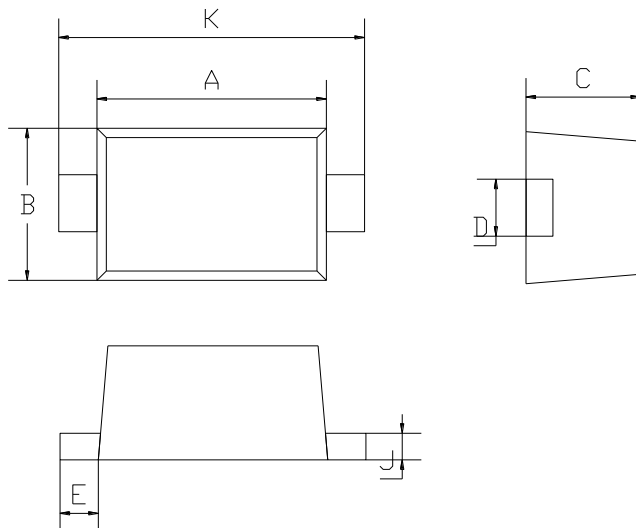


SOD-523		
Dim	Min	Max
A	1.10	1.30
B	0.70	0.90
C	0.50	0.70
D	0.25	0.35
E	0.15	0.25
J	0.05	0.15
K	1.50	1.70

Mounting Pad Layout(unit:mm)

SOD-323

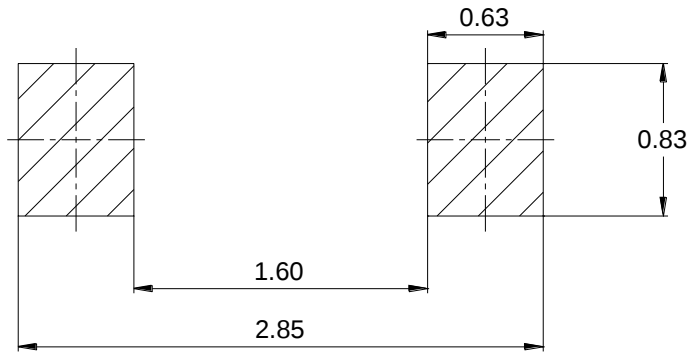

SOD-523

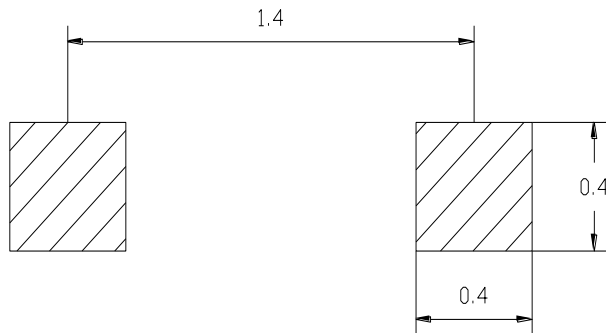

IMPORTANT NOTICE

Galaxy Microelectronics (GME) reserves the right to make changes without further notice to any product herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.