

Features

- Transient protection for data & power lines to IEC 61000-4-2(ESD) $\pm 15\text{KV}$ (air), $\pm 8\text{kV}$ (contact)
- Working voltage: 15V
- Low leakage current



HF

Typical Applications

- Cell Phone Handsets and Accessories
- Microprocessor based equipment
- Portable Instrumentation

Mechanical Data

- Case: SOT-363
- Molding compound, UL flammability classification rating 94V-0
- Terminals: Tin plated leads, solderable per MIL-STD-202, Method 208



SOT-363

Ordering Information

Part Number	Package	Shipping	Marking Code
BLF15C	SOT-363	3000 pcs / Tape & Reel	F15C

Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Characteristic	Symbol	Value	Units
Peak pulse power ($t_p = 8/20\mu\text{s}$)	P_{PK}	100	W
Peak pulse current ($t_p = 8/20\mu\text{s}$)	I_{PP}	5	A
Reverse Stand-off Voltage	V_{RWM}	15	V
ESD according to IEC61000-4-2 air discharge	V_{ESD}	± 15	KV
ESD according to IEC61000-4-2 contact discharge		± 8	

Thermal Characteristics

Parameter	Symbol	Value	Units
Junction temperature	T_J	-55 to +125	$^\circ\text{C}$
Storage temperature range	T_{STG}	-55 to +150	$^\circ\text{C}$

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	Min.	Typ.	Max.	Units
Reverse breakdown voltage	V_{BR}	$I_R = 1\text{mA}$	17	-	20	V
Reverse leakage current	I_R	$V_R = 15\text{V}$	-	-	1	μA
Clamping voltage	V_C	$I_{PP} = 1\text{A}$, $t_p = 8/20\mu\text{s}$	-	-	23	V
		$I_{PP} = 5\text{A}$, $t_p = 8/20\mu\text{s}$	-	-	35	V
Junction capacitance	C_J	$V_R = 0\text{V}$, $f = 1\text{MHz}$ Pin 1 ,3,4,5,6 to 2	-	-	45	pF

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

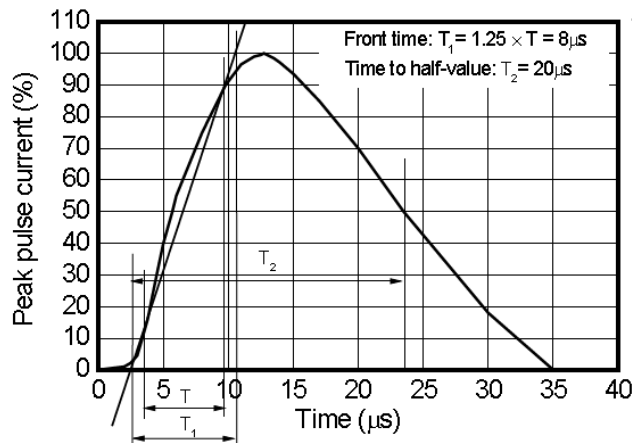


Fig1. 8/20 μs waveform per IEC61000-4-5

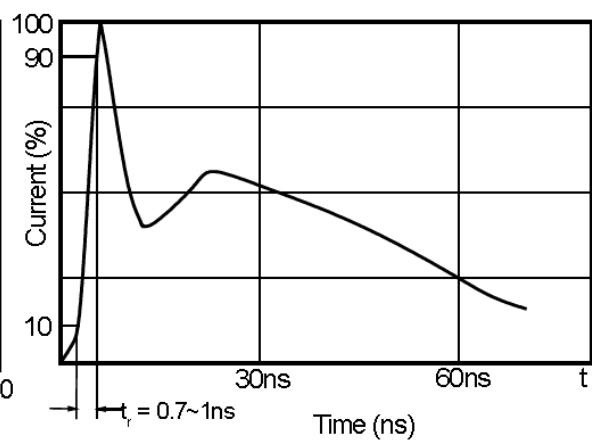


Fig2. ESD pulse waveform according to IEC61000-4-2


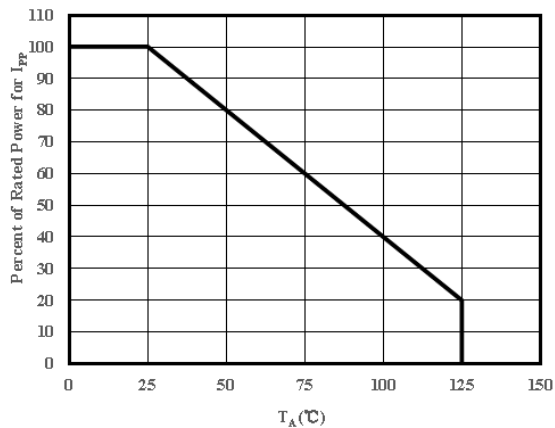


Fig3. Power Derating Curve


Package Outline Dimensions (Unit: mm)

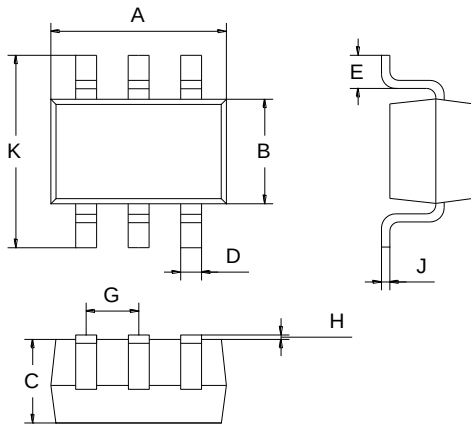

SOT-363		
Dimension	Min.	Max.
A	2.00	2.20
B	1.15	1.35
C	0.85	1.05
D	0.15	0.35
E	0.25	0.40
G	0.60	0.70
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40

Package Outline Dimensions (Unit: mm)

SOT-363

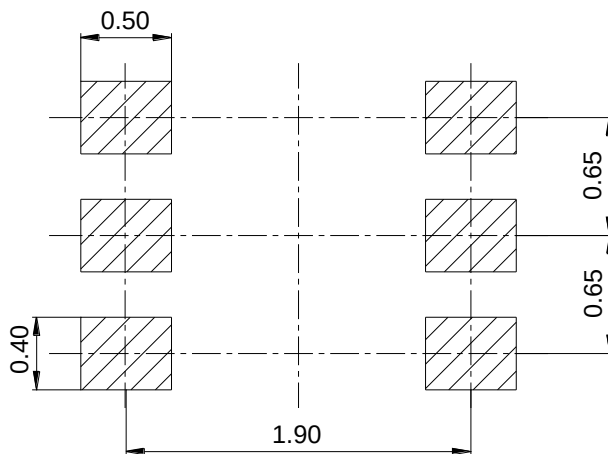

IMPORTANT NOTICE

Galaxy Microelectronics (GME) reserves the right to make changes without further notice to any product herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.