


Features


- ESD / transient protection of high speed data lines
 - IEC 61000-4-2 (ESD): ± 25 kV (air), ± 25 kV (contact)
- Working voltage: $V_{RWM} = 27V$
- Low reverse clamping voltage
- Ultra low leakage current
- RoHS compliant with Halogen-free

HF



Typical Applications

- LIN
- CAN
- FlexRay
- SENT



Mechanical Data

- Case: SOD-323
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

SOD-323

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
ESD1IVN27	SOD-323	3000 pcs / Tape & Reel	VN27

Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
IEC 61000-4-2; ESD (Air)	V_{ESD-A}	± 25	kV
IEC 61000-4-2; ESD (Contact)	V_{ESD-C}	± 25	kV
Peak Pulse Power ($t_p = 8/20\mu\text{s}$)	P_{PP}	300	W
Peak Pulse Current ($t_p = 8/20\mu\text{s}$)	I_{PP}	5	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Junction Temperature	T_J	$-55 \sim +150$	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	$-55 \sim +150$	$^\circ\text{C}$

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Reverse Stand-off Voltage	V_{RWM}		-	-	27	V
Reverse Breakdown Voltage	$V_{(BR)}$	$I_T = 1\text{mA}$	28	-	38	V
Reverse Leakage Current	I_R	$V_{RWM} = 27\text{V}$	-	-	50	nA
Clamping Voltage	V_C	$I_{PP} = 1\text{A}, t_p = 8/20\mu\text{s}$	-	38	42	V
		$I_{PP} = 3\text{A}, t_p = 8/20\mu\text{s}$	-	47	50	V
		$I_{PP} = 5\text{A}, t_p = 8/20\mu\text{s}$	-	57	60	V
		$I_{PP} = 16\text{A}, t_p = \text{TLP}$	-	55	-	V
Junction Capacitance	C_J	$V_R = 0\text{V}, f = 1\text{MHz}$	-	14	17	pF

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

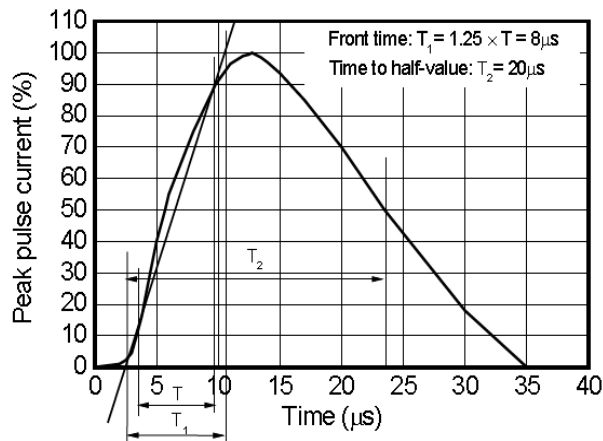


Fig 1 8/20 μs waveform per IEC61000-4-5

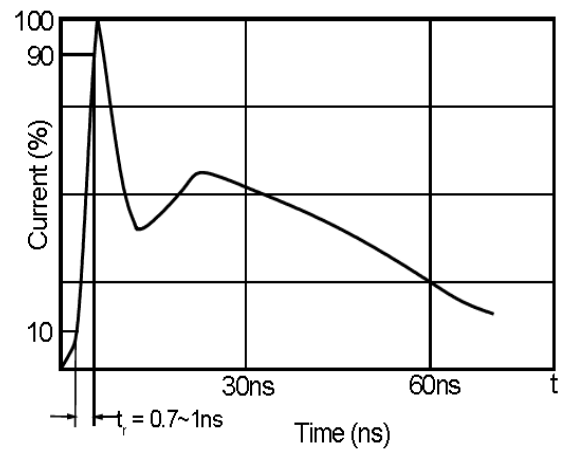


Fig 2 ESD pulse waveform according to IEC61000-4-2

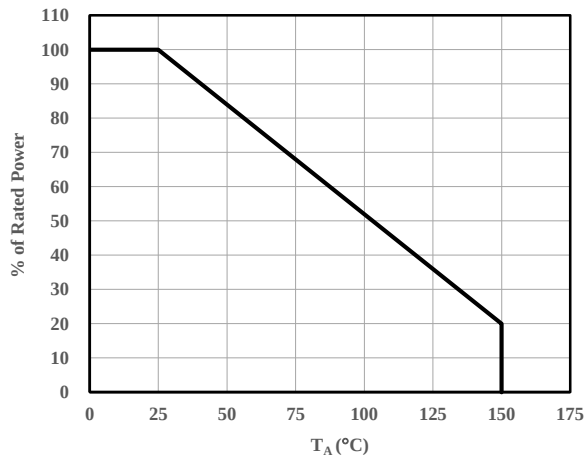


Fig 3 Power Derating Curve

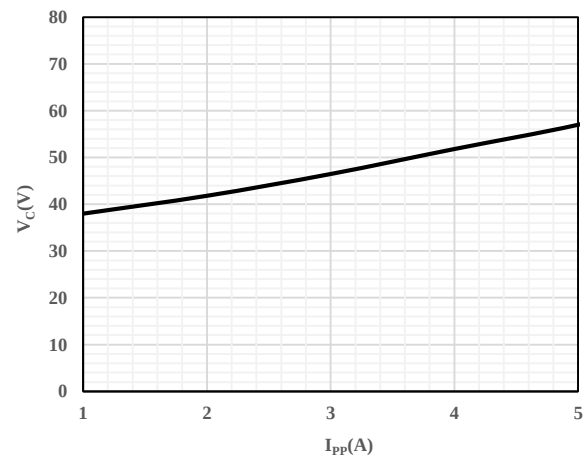


Fig 4 Clamping Voltage vs. Peak Pulse Current

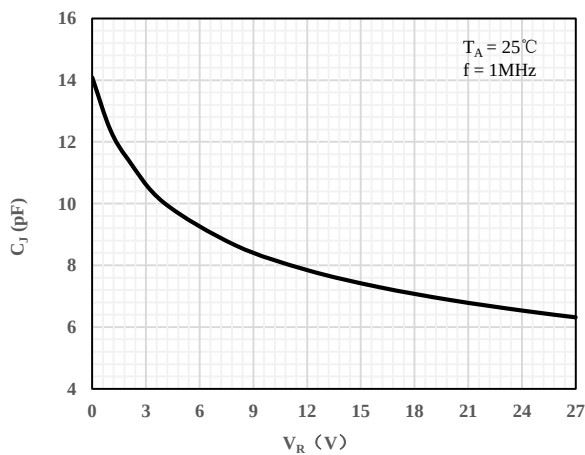


Fig 5 Junction Capacitance vs. Reverse Voltage


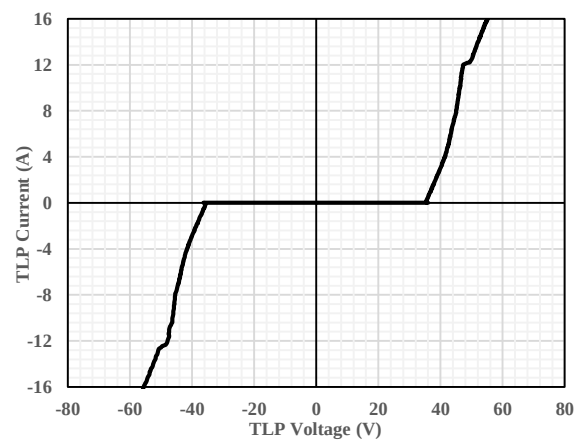


Fig 6 TLP Measurement

Package Outline Dimensions (Unit: mm)



Mounting Pad Layout (Unit: mm)

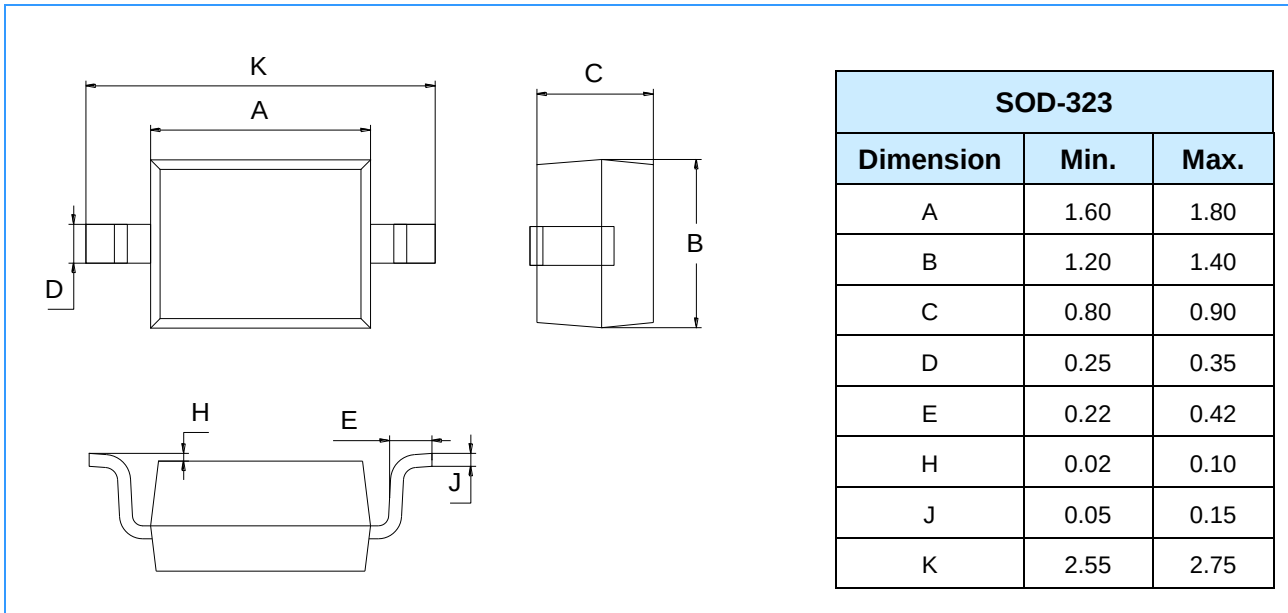