


1. Taping dimensions (Unit : mm)


MOD	A (_T52A/TA)*	A (_T26A)*	B (_T52A/TA*)	B (_T26A)*	C	D	E	F	Qty/ Inner box
DO-35	64.00 (+1.69-0.69)	38.00 (+1.5-1.0)	52 ± 0.69	26.25 ± 0.25	5.0 ± 0.4	1.2(max)	0.8(max)	± 0.80	5000

*Note: Option T26A is short lead option, option T52A is the standard (default) lead length. See product datasheet for applicable option.

DO-35 PACKING CONFIGURATION

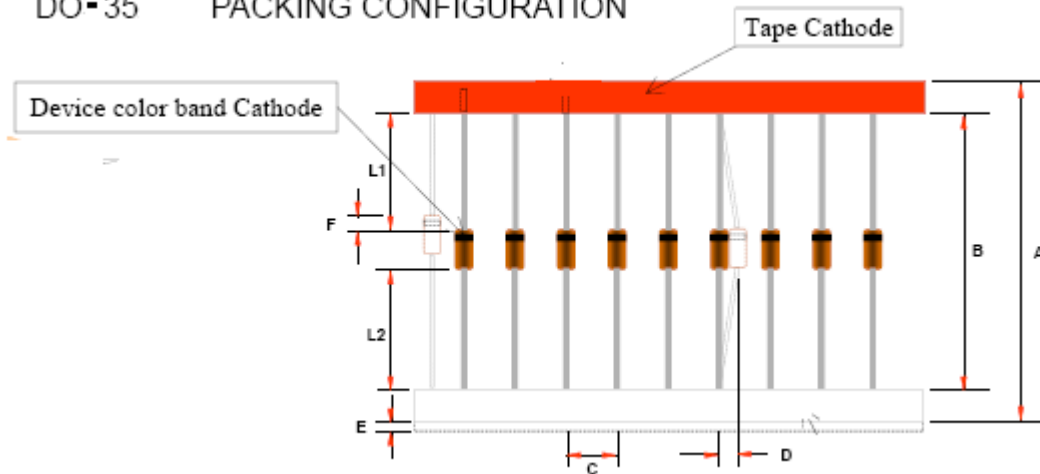

2. Leading direction

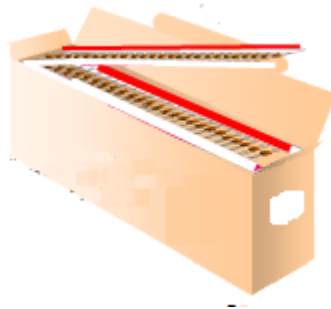

3. Quantity (INNER BOX)

CASE TYPE	INNER BOX			
	(K)	COMPONENT SPACE(mm)	TAPE SPACE(mm)	SIZE (mm3)
DO-35	5	5	52	255*75*80
DO-35	5	5	26	257*46*79


4. Marking

Each box shall be legibly marked with the following items.



5. Type

Product code of taping shall be composed as indicated below.

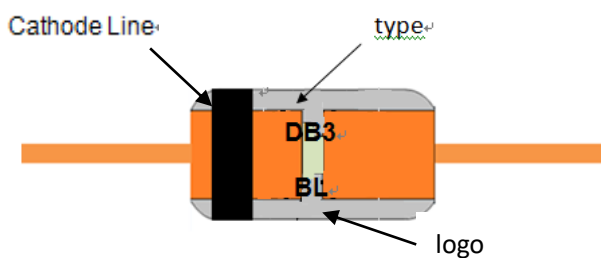

6.Recommended storage condition


Temperature 15℃ - 30℃, Humidity 30%RH - 70%RH

Recommended storage time period :

Plated products (Sn99.9%) : One years after production

Notes) It is recommended to confirm solderability before using products of which storage time is exceeding recommended storage time period.

7. Package

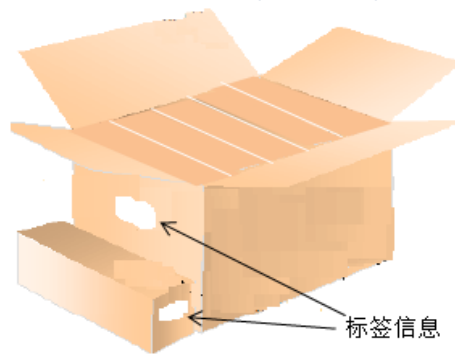

CASE TYPE	INNER BOX				CARTON	
	(K)	COMPONENT SPACE(mm)	TAPE SPACE(mm)	SIZE (mm3)	(K)	SIZE (mm3)
DO-35	5	5	52	255*75*80	100	400*270*340
DO-35	5	5	26	257*46*79	120	400*270*340