



## 1. Tube Packing


### 1.1 Tube Quantity 15 pcs / Tube

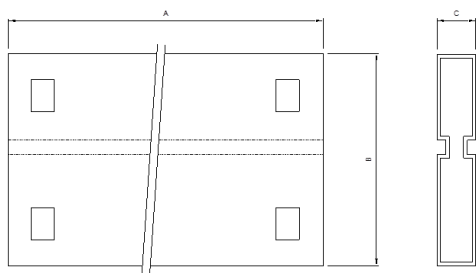

### 1.2 Inner Box




### 1.3 Carton

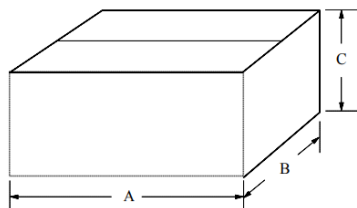

### 1.4 Dimensions (Unit : mm)


	A	B	C
Tube	483±1.5	45.3±0.3	8.3±0.3
Box	495±5	220±5	95±5
Carton	520±7	240±7	220±7

### 1.5 Package

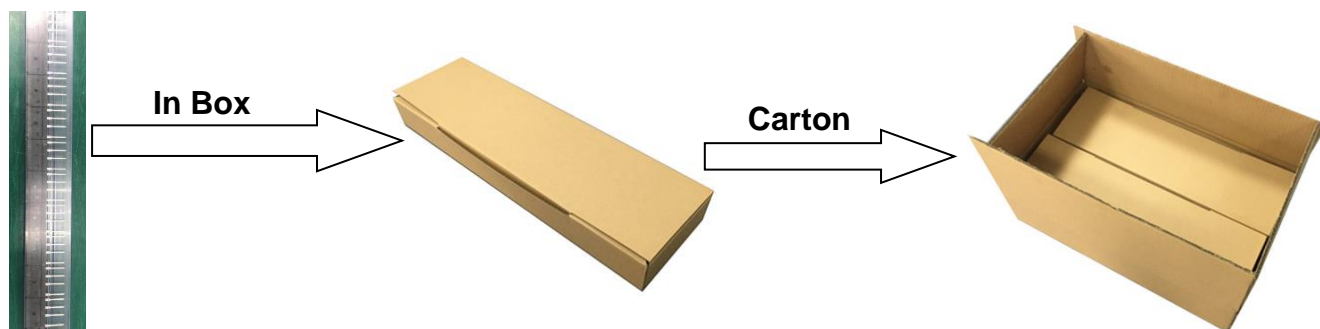


## 2. Box Packing

### 2.1 Box 500 pcs / Box



### 2.2 Carton

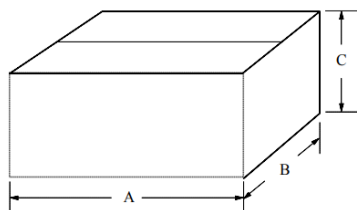


### 2.3 Dimensions (Unit : mm)

	A	B	C
Box	310±5	260±5	40±5
Carton	605±7	390±7	160±7

### 2.4 Package



In Box







Put in carton




### 3. Marking

Each reel shall be legibly marked with the following items.

<b>PART NO.:</b> GBJ10K	<b>DATE:</b> 2021-01-11
<b>PKG.:</b> GBJ	<b>Q'TY:</b> 0.5KPCS
<b>RANGE:</b> PASS	  
<b>LOT. NO.:</b> R21010108	
 <b>Changzhou Galaxy Century Microelectronics Co., Ltd.</b>	

### 4. Type

Product code of taping shall be composed as indicated below.

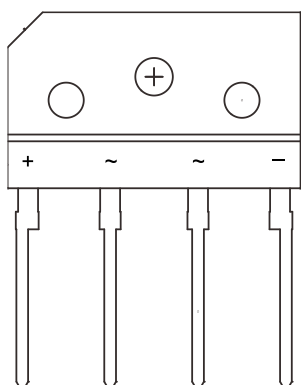

### 5. Recommended storage condition

#### Storage period

Use the products within 12 months after delivered.

The first reflow soldering should be performed within 168 hours after opening the moisture-proof.

#### Storage conditions

Products should be stored in the warehouse on the following conditions.

Temperature : 0~ 35° C

Humidity : 30 to 70% relative humidity No rapid change on temperature and humidity

Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solderability.