



## 1. Tube Packing


### 1.1 Tube Quantity 18 pcs / Tube

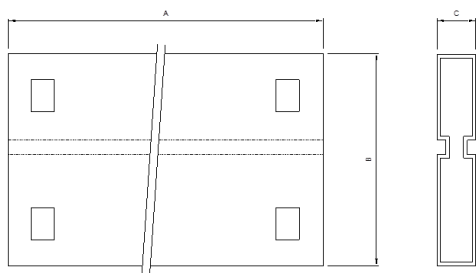

### 1.2 Inner Box




### 1.3 Carton

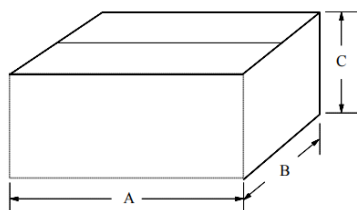

### 1.4 Dimensions (Unit : mm)


	A	B	C
Tube	483±1.5	45.3±0.3	8.3±0.3
Box	545±5	220±5	95±5
Carton	565±7	240±7	220±7

### 1.5 Package

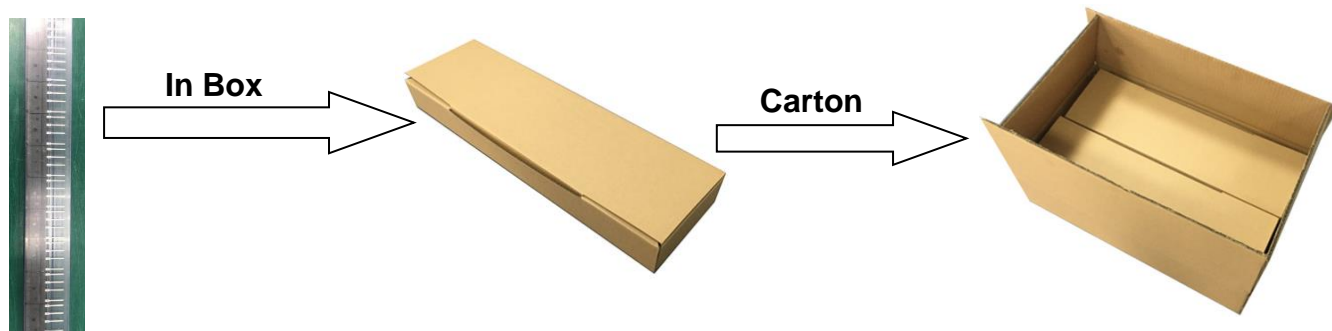


## 2. Box Packing

### 2.1 Box 500 pcs / Box



### 2.2 Carton

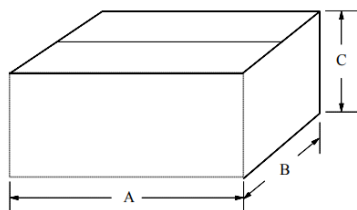

### 2.3 Dimensions (Unit : mm)

	A	B	C
Box	260±5	260±5	35±5
Carton	600±7	330±7	150±7

### 2.4 Package



In Box




Put in carton




### 3. Marking

Each reel shall be legibly marked with the following items.

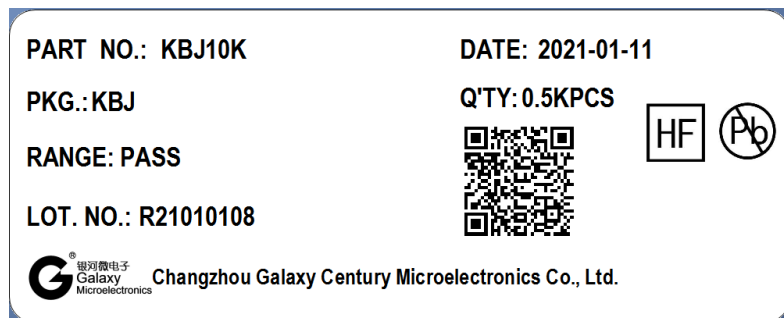

### 4. Type

Product code of taping shall be composed as indicated below.

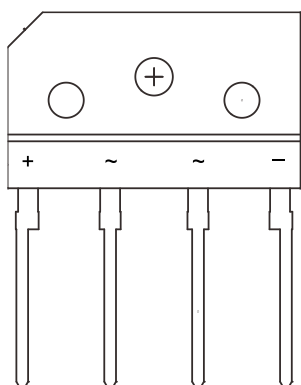

### 5. Recommended storage condition

#### Storage period

Use the products within 12 months after delivered.

The first reflow soldering should be performed within 168 hours after opening the moisture-proof.

#### Storage conditions

Products should be stored in the warehouse on the following conditions.

Temperature : 0~ 35° C

Humidity : 30 to 70% relative humidity No rapid change on temperature and humidity

Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solderability.