


Cathode mark comes to feeding hole side. The direction shall be one in a reel.

2. Reeling specification


2-1. Leading direction

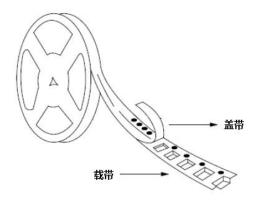

2-2. Leader and Trail

Leader tape shall be separated into two parts-an adhesive tape at first part and carrier tape without products.


Trail tape shall remain with no product and trail tape shall not be stuck directly on a reel.

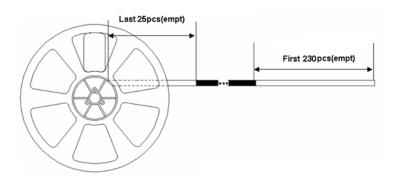


3. Treatment for end of tape



The end of leader tape shall be fixed with the white adhesive tape.

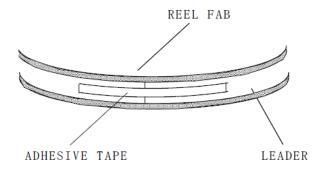

- 4. Quantity 10,000 pcs / reel
- 5. Reel dimensions (Unit: mm)

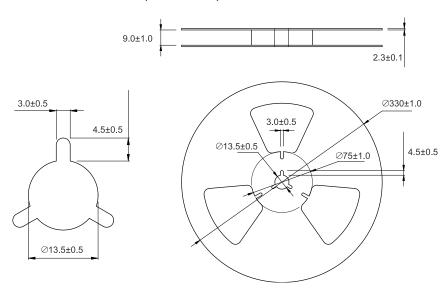

6. Marking

Each reel shall be legibly marked with the following items.

PART NO.: SOF4007 DATE: 2021-01-11

Q'TY: 10KPCS PKG.: SOD-123F


LOT. NO.: S21010108

RANGE: PASS





7. Type Product code of taping shall be composed as indicated below.





8. Taping Peeling Strength

Peel Force (Reel Package)

Angel of peeling off: 180±15 degree Speed of peeling off: 0.33m per minute

Peel Force: 20g~60g

9. Recommended storage condition

Storage period

Use the products within 12 months after delivered.

The first reflow soldering should be performed within 168 hours after opening the moisture-proof.

Storage conditions

Products should be stored in the warehouse on the following conditions.

Temperature: 0~ 35° C

Humidity: 30 to 70% relative humidity No rapid change on temperature and humidity Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solderability.

10. Package

