


Tape and Packing


1. Taping dimensions (Unit: mm)

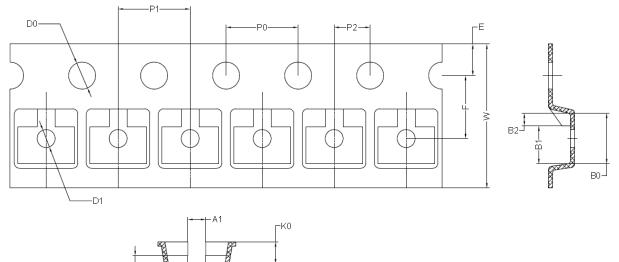

SYMBOL	A0	A1	B0	B1	B2	KO	K1	PO
SPEC	3.18±0.10	1.04±0.20	3.28±0.10	2.49±0.10	0.79	1.32±0.10	0.46	4.00±0.10
SYMBOL	P1	P2	D0	D1	E	F	W	
SPEC	4.00±0.10	2.00±0.05	1.50+0.10	1.00+0.25	1.75±0.10	3.50±0.10	8.00 ^{+0.30} -0.10	

TAPING POSITION (SOT-23-3L)


K1

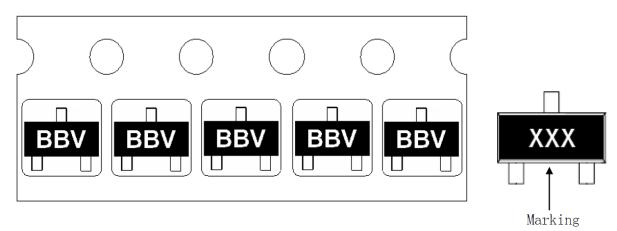

feeding direction




- 2. Reeling specification
- 2-1. Leading direction



2-2. Leader and Trail


Leader tape shall be separated into two parts-an adhesive tape at first part and carrier tape without products.

Trail tape shall remain with no product and trail tape shall not be stuck directly on a reel.

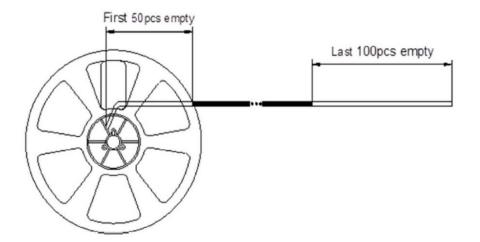


3. Treatment for end of tape

The end of leader tape shall be fixed with the yellow adhesive tape.





- 4. Quantity 3,000 pcs / reel
- 5. Reel dimensions (Unit: mm)

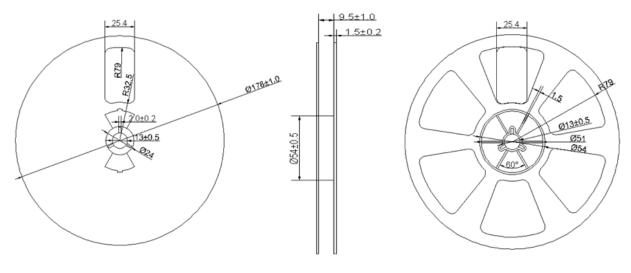

6. Marking

Each reel shall be legibly marked with the following items.

PART NO.: BL817C

DATE: 2020-01-01

Q'TY: 30KPCS

PKG.:DIP-4L

RANGE: C 200-400

LOT. NO.: J1912001C



³⁻ Changzhou Galaxy Century Microelectronics Co., Ltd.

7. Type

Product code of taping shall be composed as indicated below.



C0C



8. Taping Peeling Strength

Peel Force (Reel Package) Angel of peeling off: 180±15 degree Speed of peeling off: 3m per minute Peel Force: 20g~80g

9. Recommended storage condition

Storage period

Use the products within 12 months after delivered.

The first reflow soldering should be performed within 168 hours after opening the moisture-proof.

Storage conditions

Products should be stored in the warehouse on the following conditions.


Temperature : 0~ 35° C

Humidity: 30 to 70% relative humidity No rapid change on temperature and humidity Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solderability.



Tape and Packing

10. Package

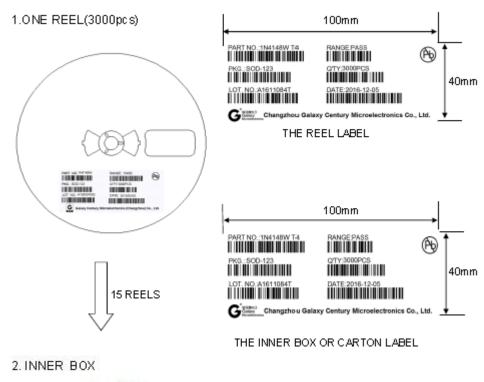



3. CARTON



Put in carton(4 inner box)



CARTON LABEL(180KPCS)