




# 1. Taping dimensions (Unit: mm)

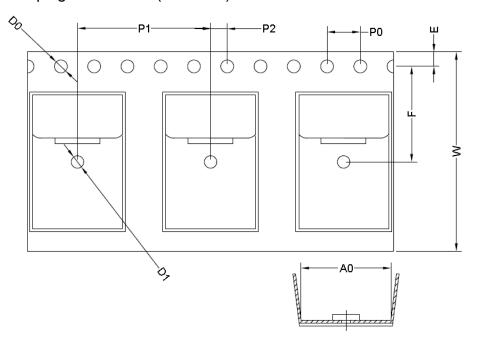


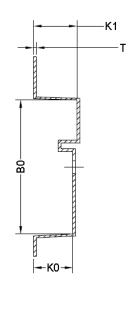

SYMBOL	A0	В0	K0	K1	<b>P</b> 0	P1	P2
SPEC	10.80±0.10	16.13±0.10	4.71±0.10	5. 21±0. 10	4.00±0.10	16.00±0.10	2.00±0.10
SYMBOL	Т	E	F	D0	D1	w	
SPEC	0.35±0.03	1.75±0.10	11.50±0.10	1.55±0.10	1.50 +0.25	24. 00+0. 30	

### **TAPING POSITION (TO-263)**

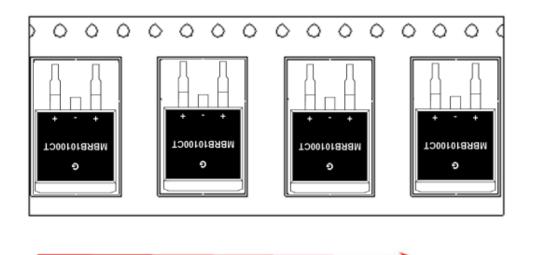




feeding direction



# 2. Reeling specification(Reel material is PS and it is antistatic)


# 2-1. Leading direction

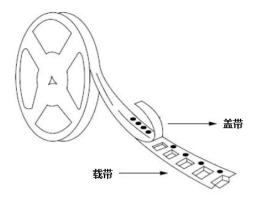

#### 2-2. Leader and Trail


Leader tape shall be separated into two parts-an adhesive tape at first part and carrier tape without products.

Trail tape shall remain with no product and trail tape shall not be stuck directly on a reel.

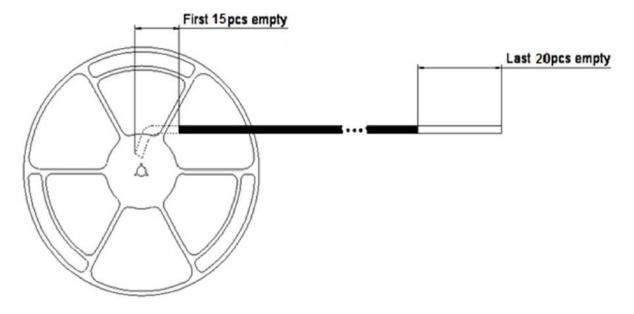

### 3. Treatment for end of tape


The end of leader tape shall be fixed with the yellow adhesive tape.

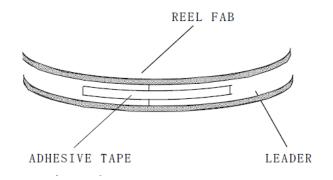

www.gmesemi.com 2 / 4 2023.6 - Rev.002



### 5. Reel dimensions (Unit: mm)

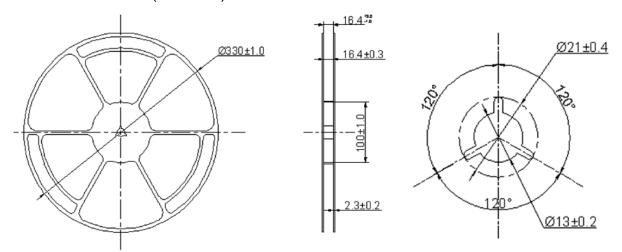

#### 6. Marking

Each reel shall be legibly marked with the following items.

PART NO.: TBL038N06HB Q'TY: 800

PKG.: TO-263 RANGE: PASS

LOT. NO.: GAG-TYB2301026

Cus. NO.: Order NO.:

DATE: 2023-02-18







ses Changzhou Galaxy Century Microelectronics Co., Ltd.

### 7. Type

Product code of taping shall be composed as indicated below.



### 8. Taping Peeling Strength

 ${\bf Peel\ Force\ (\,Reel\ Package\,)}$ 

Angel of peeling off: 180±15 degree Speed of peeling off: 3m per minute

Peel Force: 20g~80g

#### 9. Recommended storage condition

Storage period

Use the products within 12 months after delivered.

The first reflow soldering should be performed within 168 hours after opening the moisture-proof.



### Storage conditions


Products should be stored in the warehouse on the following conditions.


Temperature: 0~ 35° C

Humidity: 30 to 70% relative humidity No rapid change on temperature and humidity Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solderability.

### 10. Package




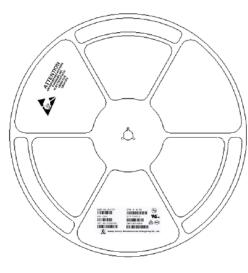





THE REEL OR INNER BOX LABEL

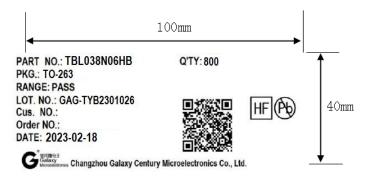

**CARTON LABEL** 

#### 2. INNER BOX

