


Features

- High speed and high reliability

HF

Mechanical Data

- Case: SOD-523
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208



Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
1SS422	SOD-523	3000 pcs / Tape & Reel	6

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Non-Repetitive Peak Reverse Voltage	V _{RM}	100	V
DC Blocking Voltage	V _R	85	V
RMS Reverse Voltage	V _{R(RMS)}	70	V
Average Rectified Output Current	I _O	150	mA
Peak Forward Surge Current, 1s Single Half-sine-wave	I _{FSM}	0.5	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P _D	150	mW
Operating Junction Temperature Range	T _J	-55 ~ +125	°C
Storage Temperature Range	T _{STG}	-55 ~ +150	°C

Electrical Characteristics (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V _F	I _F = 150mA	-	-	1.2	V
Maximum Peak Reverse Current	I _R	V _R = 85V	-	-	0.1	μA
Total Capacitance	C _J	V _R = 0.5V, f = 1.0MHz	-	-	3	pF
Reverse Recovery Time	t _{rr}	I _F = 10mA, V _R = 6V R _L = 100Ω	-	-	4	ns

Ratings and Characteristic Curves (@ T_A = 25°C unless otherwise specified)

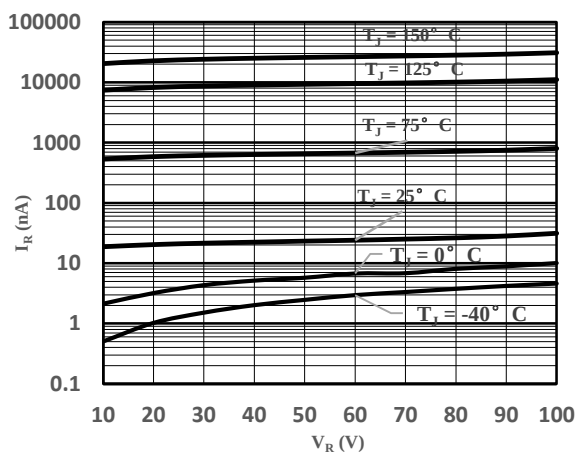


Fig 1 Typical Reverse Characteristic

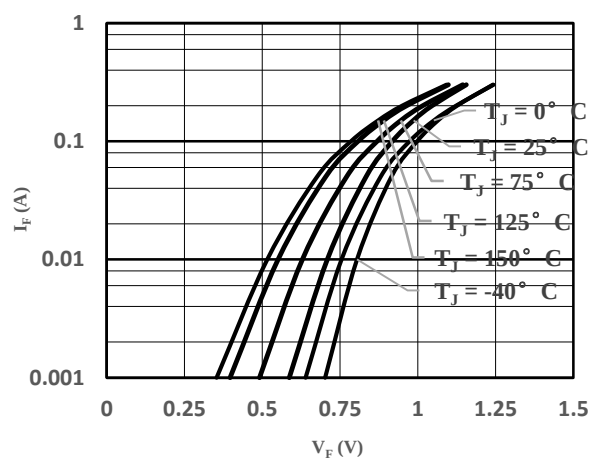


Fig 2 Typical Forward Characteristics

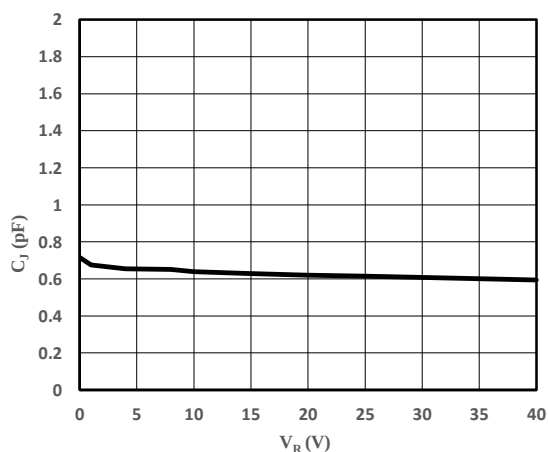


Fig 3 Capacitance vs. Reverse Voltage


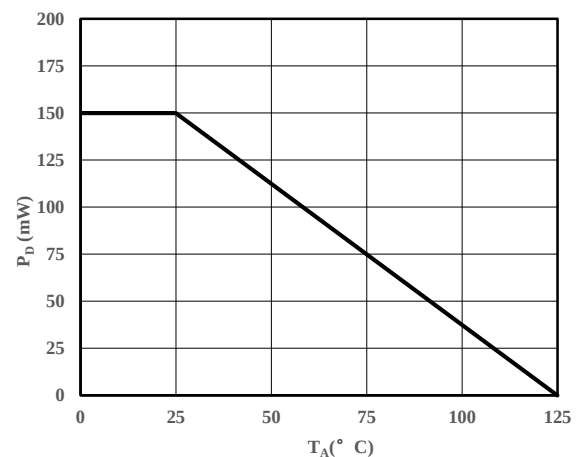


Fig 4 Power Derating Curve

Package Outline Dimensions (Unit: mm)

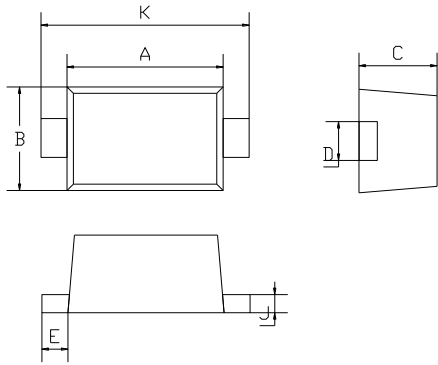

SOD-523		
Dimension	Min.	Max.
A	1.10	1.30
B	0.70	0.90
C	0.50	0.70
D	0.25	0.35
E	0.15	0.25
J	0.05	0.15
K	1.50	1.70

Package Outline Dimensions (Unit: mm)

SOD-523

