NPN/PNP General Purpose Transistor

BL2045-6L


Features


HF

- Epitaxial planar die construction
- Two internal isolated NPN/PNP transistors in one package
- Ultra-small surface mount package

Mechanical Data

- Case: SOT-23-6L
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Tin-plated; solderability per MIL-STD-202, Method 208





SOT-23-6L

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
BL2045-6L	SOT-23-6L	3000 pcs / Tape & Reel	2045

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	NPN	PNP	Unit
Collector-Base Voltage	V_{CBO}	40	-40	V
Collector-Emitter Voltage	V_{CEX}	40	-40	V
Collector-Emitter Voltage	V_{CEO}	30	-30	V
Emitter-Base Voltage	V_{EBO}	7	-7	V
Collector Current (Continuous)	I_C	1.5	-1.5	A
Collector Current (Pulse)	I_{CM}	5	-5	A
Base Current	I_B	1	-1	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation (T_A = 25°C)	P_D	350	mW
Thermal Resistance Junction-to-Air	$R_{\theta JA}$	357	°C/W
Operating Junction Temperature	T_J	-55 ~ +150	°C
Storage Temperature Range	T_{STG}	-55 ~ +150	°C

Electrical Characteristics of NPN Transistor (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	I_C = 100μA, I_E = 0	40	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	I_C = 10mA, I_B = 0	30	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEX}$	I_C = 1μA, $V_{BE(off)}$ = -0.5V	40	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	I_E = 100μA, I_C = 0	7	-	-	V
Collector Cut-off Current	I_{CBO}	V_{CB} = 32V, I_E = 0	-	-	20	nA
Collector Cut-off Current	I_{CER}	C_{CE} = 16V, R≤1kΩ	-	-	20	nA
Emitter Cut-off Current	I_{EBO}	V_{EB} = 6V, I_C = 0	-	-	20	nA
DC Current Gain *1	h_{FE}	V_{CE} = 2V, I_C = 100mA	180	-	500	-
Collector-emitter Saturation Voltage *1	$V_{CE(sat)}$	I_C = 750mA, I_B = 15mA	-	-	0.375	V
Base-emitter Saturation Voltage *1	$V_{BE(sat)}$	I_C = 750mA, I_B = 15mA	-	-	1.2	V

Electrical Characteristics of PNP Transistor (@ T_A = 25℃ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	I_C = -100μA, I_E = 0	-40	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	I_C = -10mA, I_B = 0	-30	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEX}$	I_C = -1μA, $V_{BE(off)}$ = 0.5V	-40	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	I_E = -100μA, I_C = 0	-7	-	-	V
Collector Cut-off Current	I_{CBO}	V_{CB} = -32V, I_E = 0	-	-	-20	nA
Collector Cut-off Current	I_{CER}	C_{CE} = -16V, R≤1kΩ	-	-	-20	nA
Emitter Cut-off Current	I_{EBO}	V_{EB} = -6V, I_C = 0	-	-	-20	nA
DC Current Gain *1	h_{FE}	V_{CE} = -2V, I_C = -100mA	180	-	500	-
Collector-emitter Saturation Voltage *1	$V_{CE(sat)}$	I_C = -750mA, I_B = -15mA	-	-	-0.375	V
Base-emitter Saturation Voltage *1	$V_{BE(sat)}$	I_C = -750mA, I_B = -15mA	-	-	-1.2	V

Note 1: Pulse test: Pulse Width≤300μs, Duty Cycle≤2%

Ratings and Characteristic Curves-NPN (@ T_A = 25℃ unless otherwise specified)

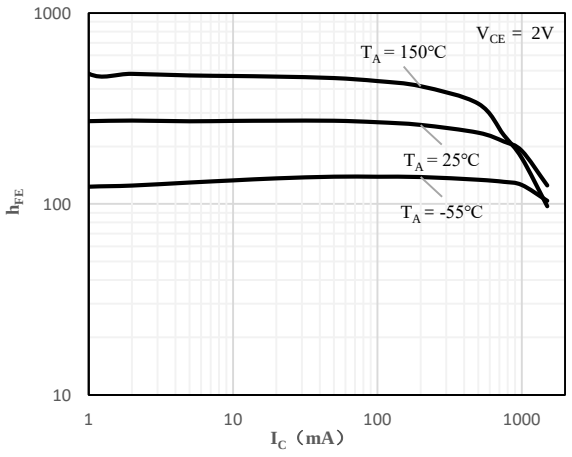


Fig 1 h_{FE} vs. I_C

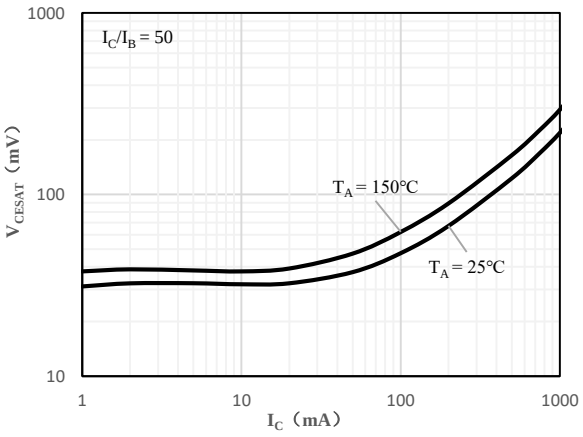


Fig 2 $V_{CE(sat)}$ vs. I_C

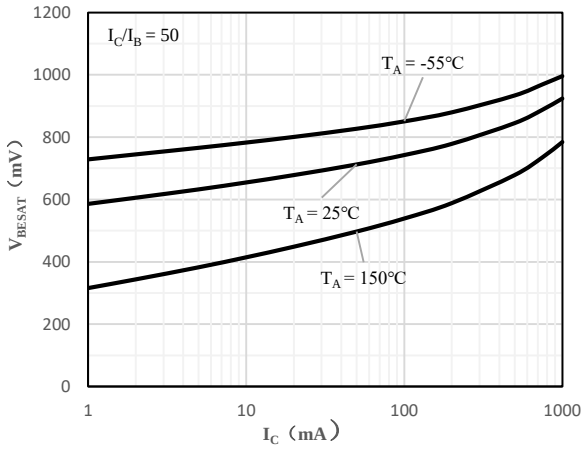


Fig 3 $V_{BE(sat)}$ vs. I_C

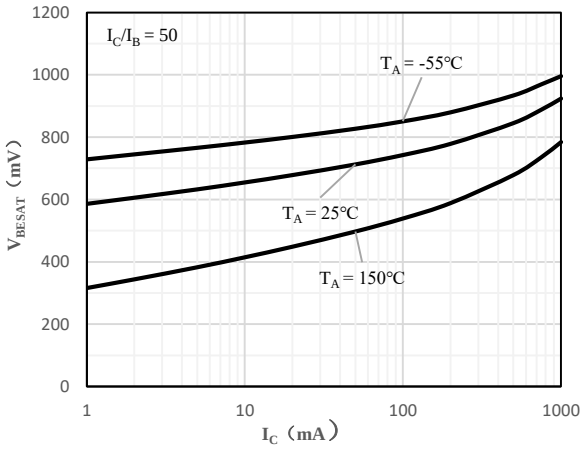


Fig 4 $V_{BE(ON)}$ vs. I_C

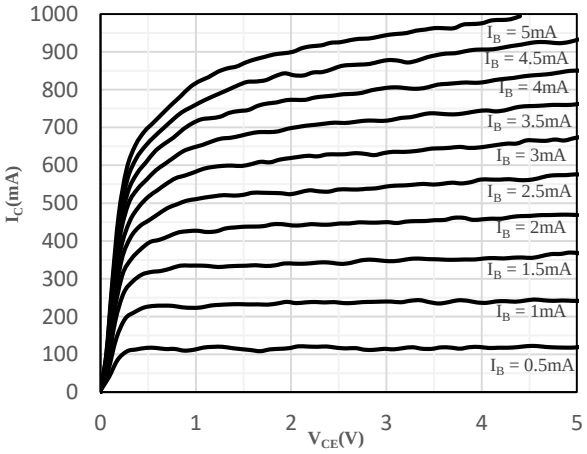


Fig 5 I_C vs. V_{CE}

Ratings and Characteristic Curves-PNP (@ T_A = 25℃ unless otherwise specified)

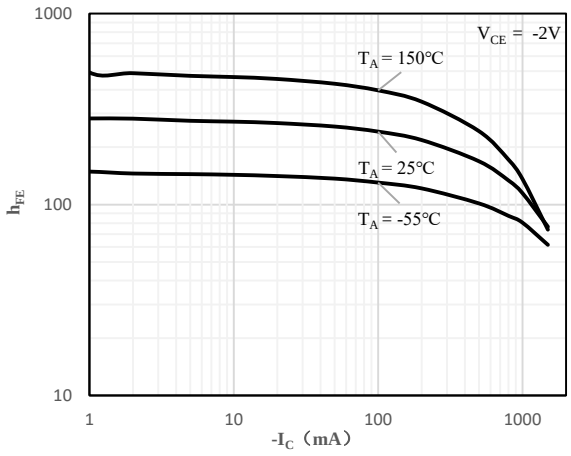


Fig 1 h_{FE} vs. I_C

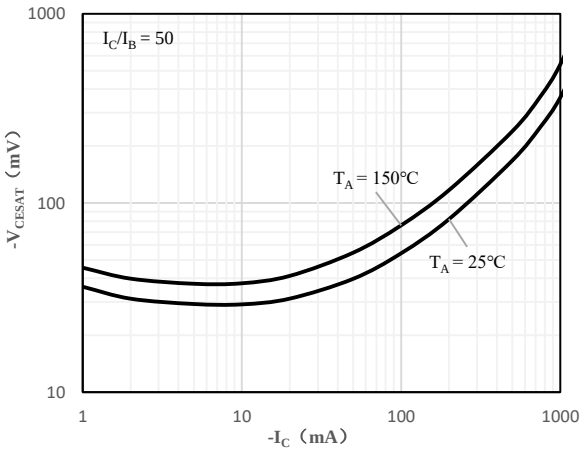


Fig 2 $V_{CE(sat)}$ vs. I_C

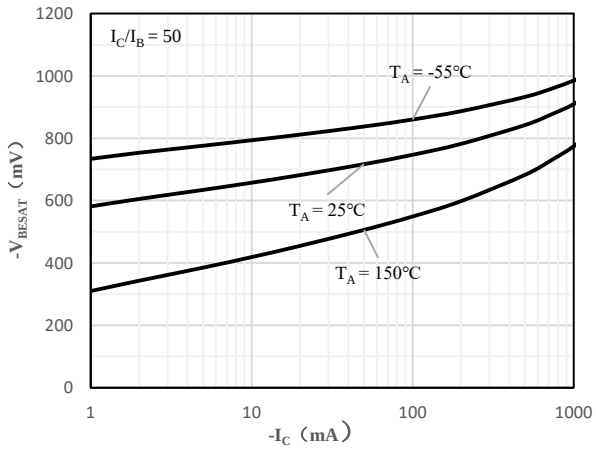


Fig 3 $V_{BE(sat)}$ vs. I_C

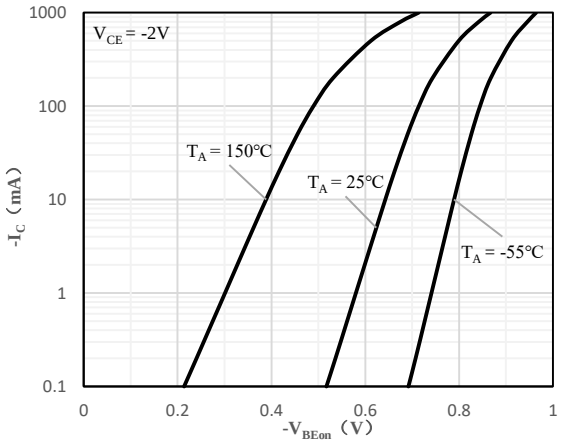


Fig 4 $V_{BE(ON)}$ vs. I_C


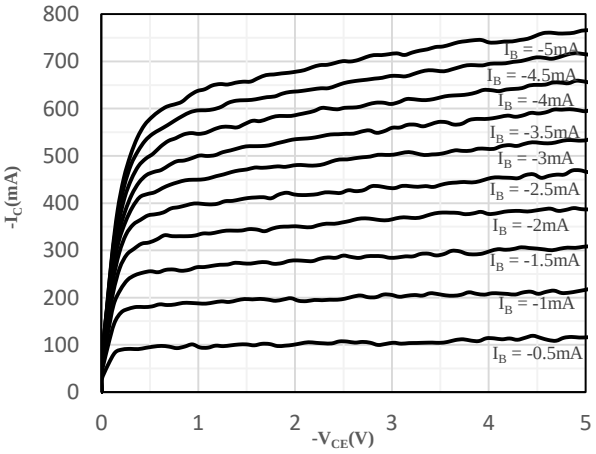


Fig 5 I_C vs. V_{CE}


Package Outline Dimensions (Unit: mm)

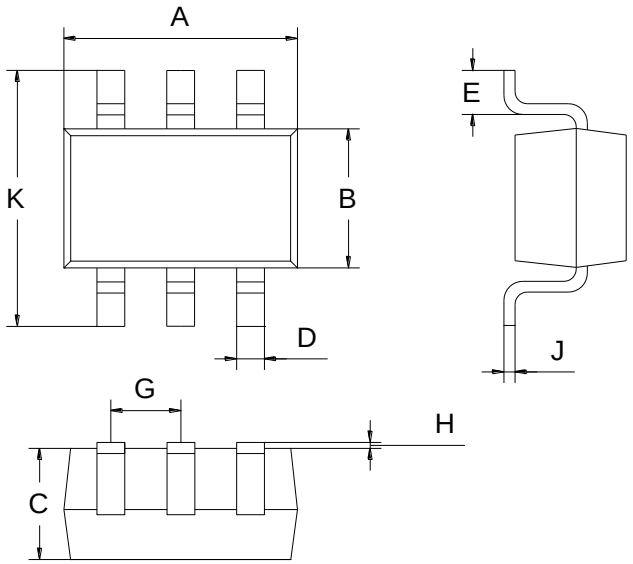

SOT-23-6L		
Dimension	**Min.**	**Max.**
A	2.80	3.00
B	1.50	1.70
C	1.00	1.20
D	0.35	0.45
E	0.35	0.55
G	0.90	1.00
H	0.02	0.10
J	0.10	0.20
K	2.60	3.00

Mounting Pad Layout (Unit: mm)

SOT-23-6L

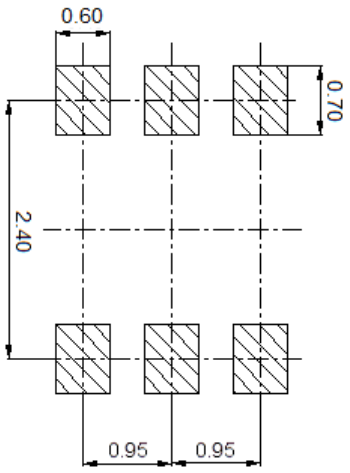

IMPORTANT NOTICE

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.