

Features

- Low on-resistance
- High-speed switching
- Drive circuits can be simple
- Parallel use is easy
- ESD protected gate up to 2kV HBM
- RoHS compliant with Halogen-free


HF

Typical Applications

- P-channel enhancement mode effect transistor
- Switching application


Mechanical Data

- Case: SOT-23, SOT-323, SOT-523, DFN1006-3
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208




BSS84ES

SOT-23




BSS84ESW

SOT-323




BSS84EST

SOT-523



BSS84ESL

DFN1006-3



Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
BSS84ES	SOT-23	3000 pcs / Tape & Reel	ES
BSS84ESW	SOT-323	3000 pcs / Tape & Reel	ES
BSS84EST	SOT-523	3000 pcs / Tape & Reel	ES
BSS84ESL	DFN1006-3	10000 pcs / Tape & Reel	ES

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Drain-to-Source Voltage	V _{DSS}	-60	V
Gate-to-Source Voltage	V _{GSS}	±20	V
Continuous Drain Current	I _D	-130	mA
Pulsed Drain Current *4	I _{DM}	-520	mA

Thermal Characteristics

Parameter		Symbol	Value	Unit
Power Dissipation ^{*1}	SOT-23	P _D	0.36	W
	SOT-323		0.20	
	SOT-523		0.15	
	DFN1006-3		0.15	
Thermal Resistance Junction-to-Air ^{*1}	SOT-23	R _{θJA}	347	°C/W
	SOT-323		625	
	SOT-523		834	
	DFN1006-3		834	
Thermal Resistance Junction-to-Lead ^{*1}	SOT-23	R _{θJL}	208	°C/W
	SOT-323		375	
	SOT-523		500	
	DFN1006-3		500	
Thermal Resistance Junction-to-Case ^{*1}	SOT-23	R _{θJC}	175	°C/W
	SOT-323		315	
	SOT-523		421	
	DFN1006-3		421	
Operating Junction Temperature Range		T _J	-55 ~ +150	°C
Storage Temperature Range		T _{STG}	-55 ~ +150	°C

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
V _{DSS}	Drain-Source Breakdown Voltage	V _{GS} = 0V, I _D = -250μA	-60	-	-	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} = -50V, V _{GS} = 0V	-	-	-1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} = ±20V, V _{DS} = 0V	-	-	±10	μA
On Characteristics *2						
R _{DS(ON)}	Static Drain-Source On-resistance	V _{GS} = -5V, I _D = -0.1A	-	2.4	8	Ω
		V _{GS} = -10V, I _D = -0.13A	-	2.0	6	
V _{GS(TH)}	Gate Threshold Voltage	V _{DS} = V _{GS} , I _D = -250μA	-1	-1.5	-2	V
Dynamic Characteristics *3						
C _{ISS}	Input Capacitance	V _{GS} = 0V V _{DS} = -20V f = 1.0MHz	-	53	-	pF
C _{OSS}	Output Capacitance		-	11	-	
C _{RSS}	Reverse Transfer Capacitance		-	5	-	
R _G	Gate Resistance	f = 1.0MHz, V _{GS} = 0V	-	721	-	Ω
Switching Characteristics						
t _{d(ON)}	Turn-on Delay Time	V _{DS} = -15V R _L = -50Ω I _D = -2.5A	-	2.5	-	ns
t _r	Turn-on Rise Time		-	1	-	
t _{d(OFF)}	Turn-Off Delay Time		-	16	-	
t _f	Turn-Off Fall Time		-	8	-	
Q _G	Total Gate-Charge	V _{DS} = -25V	-	2.5	-	nC
Q _{GS}	Gate to Source Charge	V _{GS} = -4.5V	-	0.83	-	
Q _{GD}	Gate to Drain (Miller) Charge	I _D = -0.2A	-	0.82	-	
Source-Drain Diode Characteristics						
V _{SD}	Diode Forward Voltage *2	I _S = -0.26A, V _{GS} = 0 V	-	-0.9	-1.4	V
I _S	Continuous Source Current	T _C = 25°C	-	-	-0.13	A
I _{SM}	Pulsed Source Current	T _C = 25°C	-	-	-0.52	A

Notes:

- 1、 Surface mounted on FR4 board, and standard footprint, $t \leq 10\text{ sec}$
- 2、 Pulse test: pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$
- 3、 Guaranteed by design, not subject to production
- 4、 Pulse width limited by maximum junction temperature

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

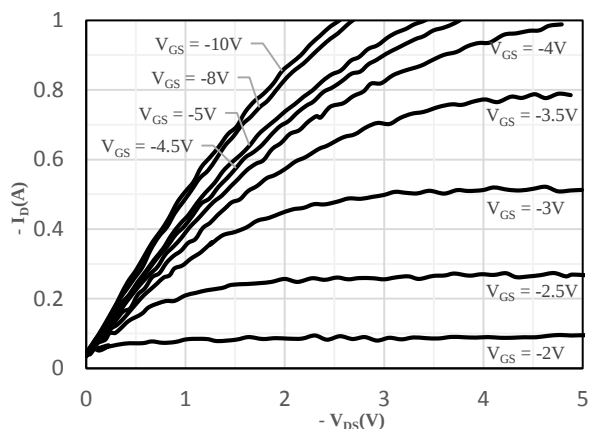


Fig 1 Output Characteristics

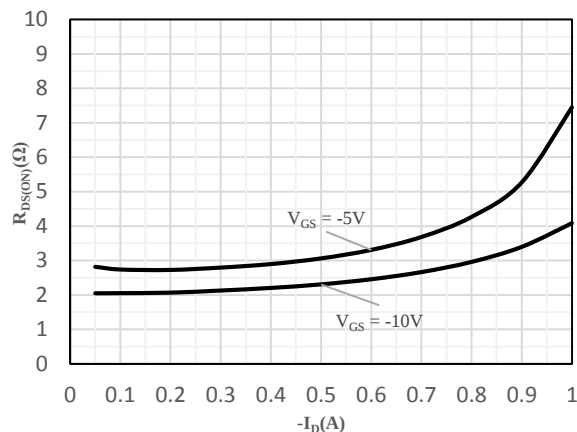


Fig 2 On-Resistance vs. Drain Current
and Gate Voltage

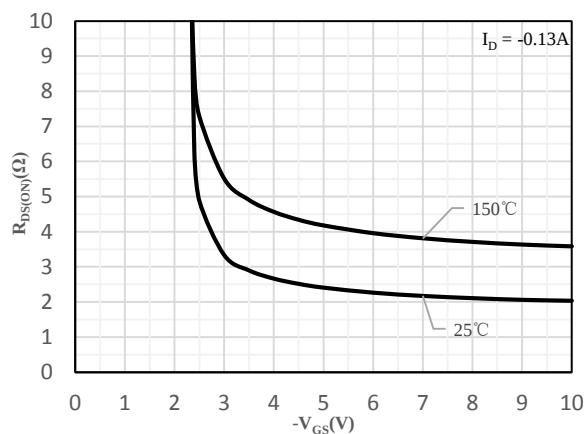


Fig 3 On-Resistance vs. Gate-Source Voltage

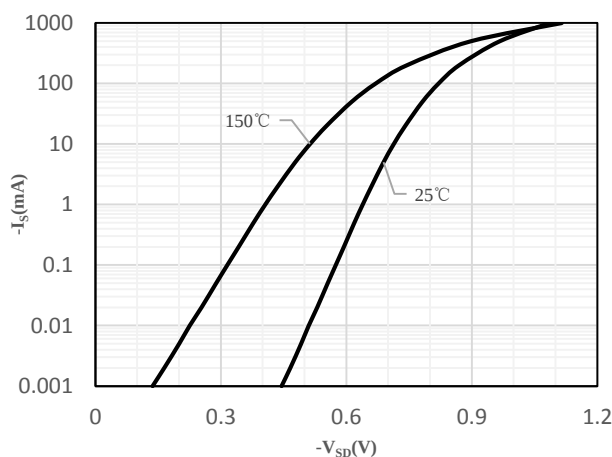


Fig 4 Body-Diode Characteristics

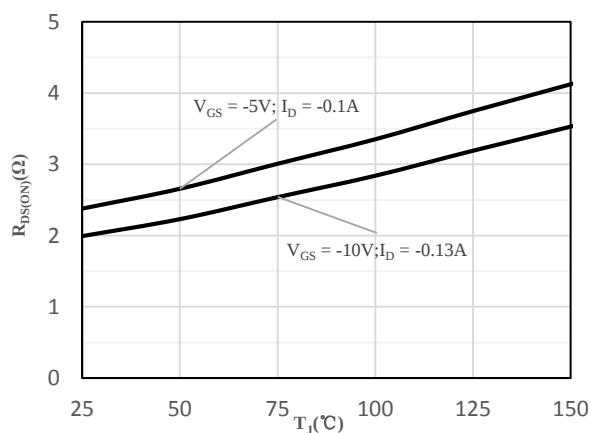


Fig 5 On-Resistance vs. Junction Temperature

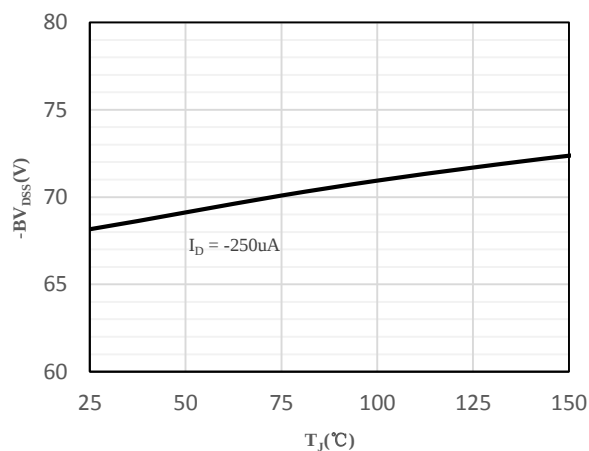


Fig 6 Drain-Source Voltage vs.
Junction Temperature

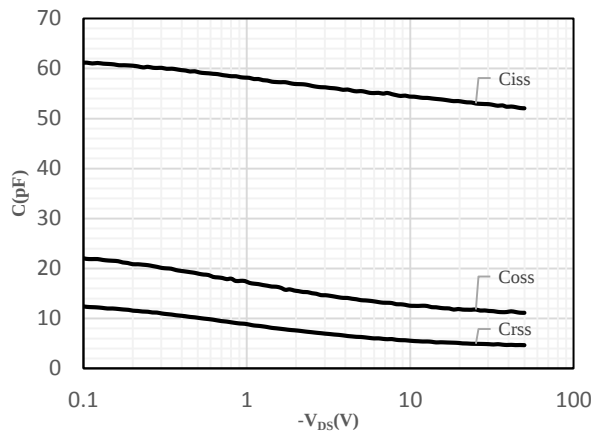


Fig 7 Capacitance Characteristics

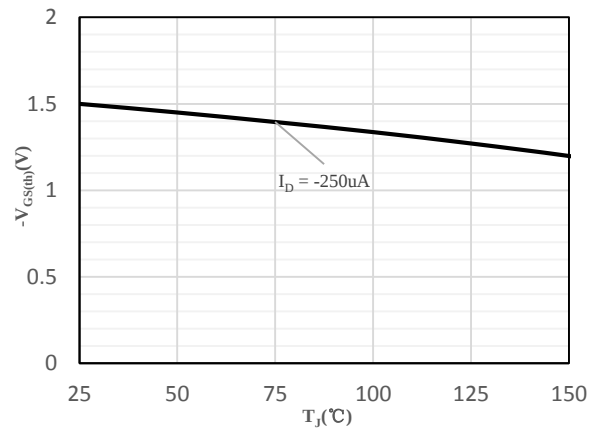


Fig 8 Gate Voltage vs. Junction Temperature

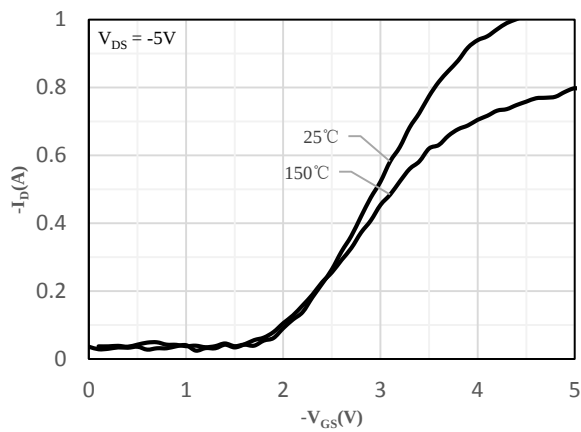


Fig 9 Transfer Characteristics


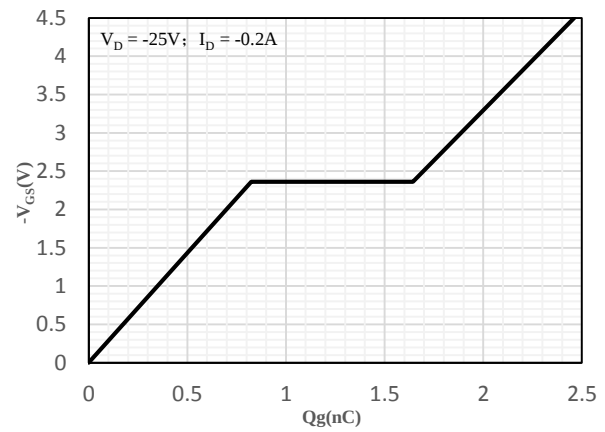


Fig 10 Gate-Charge Characteristics


Package Outline Dimensions (Unit: mm)

SOT-23

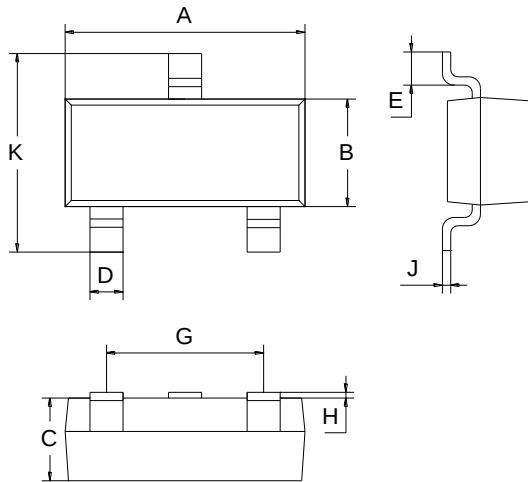


SOT-23		
Dimension	Min.	Max.
A	2.70	3.10
B	1.10	1.50
C	0.90	1.10
D	0.30	0.50
E	0.35	0.48
G	1.80	2.00
H	0.02	0.10
J	0.05	0.15
K	2.20	2.60

SOT-323

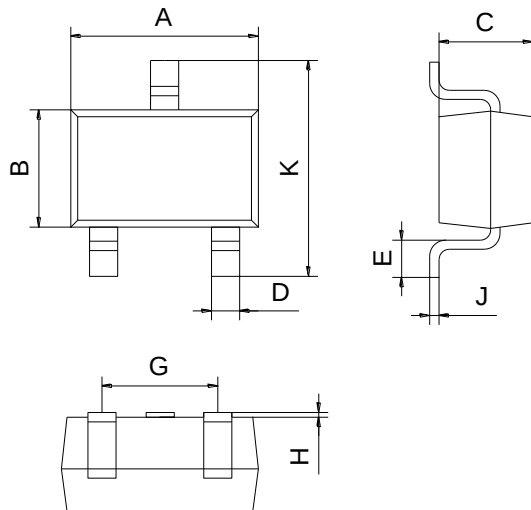


SOT-323		
Dimension	Min.	Max.
A	2.00	2.20
B	1.15	1.35
C	0.90	1.10
D	0.15	0.35
E	0.25	0.40
G	1.20	1.40
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40

SOT-523

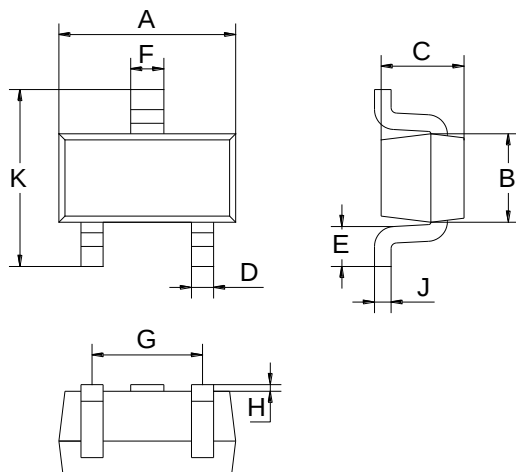

SOT-523		
Dimension	Min.	Max.
A	1.50	1.70
B	0.75	0.85
C	0.60	0.80
D	0.15	0.30
E	0.30	0.40
F	0.25	0.40
G	0.90	1.10
H	0.02	0.10
J	0.08	0.18
K	1.45	1.75

DFN1006-3

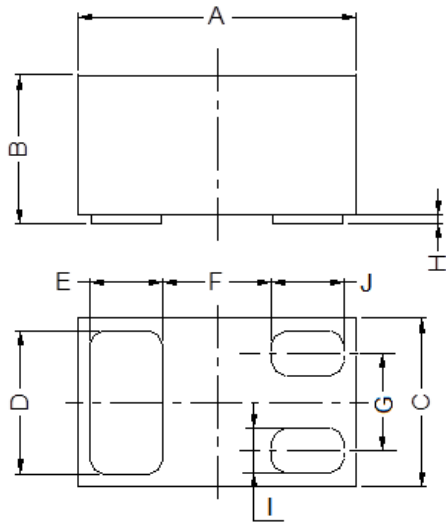


DFN1006-3


Dimension	Min.	Typ.	Max.
A	0.95	1.00	1.075
B	0.47	0.50	0.53
C	0.55	0.60	0.675
D	0.45	0.50	0.55
E/J	0.20	0.25	0.30
F	-	0.40	-
G	-	0.35	-
H	0	0.03	0.05
I	0.10	0.15	0.20

Mounting Pad Layout (Unit: mm)


SOT-23

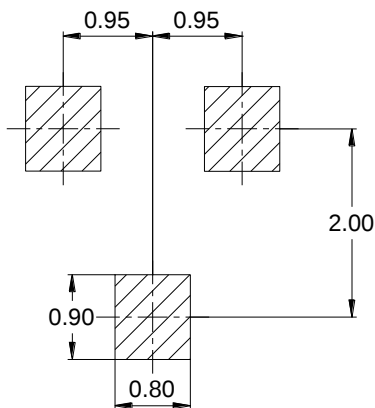

SOT-323

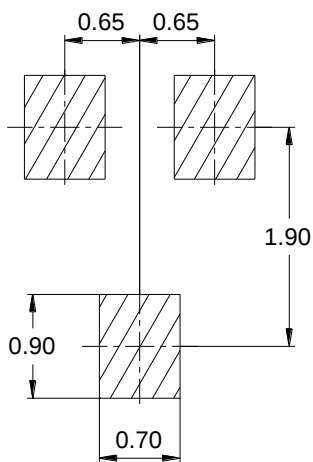

SOT-523

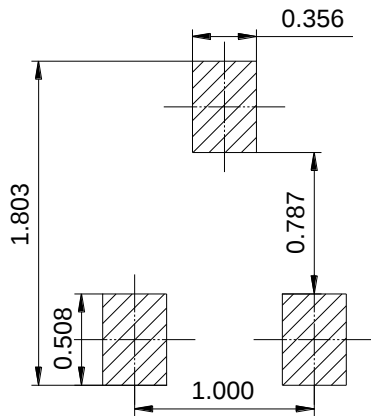

DFN1006-3

