



Features

- Epitaxial planar die construction
- Built-in biasing resistors

HF

Mechanical Data

- Case: SOT-23-6L
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208



Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
DCX124-6L	SOT-23-6L	3000 pcs / Tape & Reel	C17

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value		Unit
		DTr1	DTr2	
Supply Voltage	V _{CC}	50	-50	V
Input Voltage	V _I	-10 ~ +40	+10 ~ -40	V
Output Current	I _O	30	-30	mA
Collector Current	I _{C(Max)}	100	-100	mA

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation ^{*1}	P _D	300	mW
Thermal Resistance Junction-to-Air ^{*1}	R _{θJA}	417	°C/W
Operating Junction Temperature Range	T _J	-55 ~ +150	°C
Storage Temperature Range	T _{STG}	-55 ~ +150	°C

Note 1: Mounted on FR4 PC Board with recommended pad layout

Electrical Characteristics-DTr1 (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Voltage	$V_{I(\text{OFF})}$	$V_{CC} = 5\text{V}, I_O = 100\mu\text{A}$	0.5	-	-	V
Input Voltage	$V_{I(\text{ON})}$	$V_O = 0.3\text{V}, I_O = 5\text{mA}$	-	-	3	V
Output Voltage	$V_{O(\text{on})}$	$I_O = 10\text{mA}, I_I = 0.5\text{mA}$	-	-	0.3	V
Input Current	I_I	$V_I = 5\text{V}$	-	-	0.36	mA
Output Current	$I_{O(\text{off})}$	$V_{CC} = 50\text{V}, V_I = 0\text{V}$	-	-	0.5	μA
DC Current Gain	G_I	$V_O = 5\text{V}, I_O = 5\text{mA}$	80	-	-	-
Input Resistor	$R_1(R_2)$		15.4	22	28.6	$\text{k}\Omega$
Resistance ratio	R_2/R_1		0.8	1	1.2	-
Gain-Bandwidth Product	f_T	$V_{CE} = 10\text{V}, I_E = -5\text{mA}$ $f = 100\text{MHz}$	-	250	-	MHz

Electrical Characteristics-DTr2 (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Voltage	$V_{I(\text{OFF})}$	$V_{CC} = -5\text{V}, I_O = -100\mu\text{A}$	-0.5	-	-	V
Input Voltage	$V_{I(\text{ON})}$	$V_O = -0.3\text{V}, I_O = -5\text{mA}$	-	-	-3	V
Output Voltage	$V_{O(\text{on})}$	$I_O = -10\text{mA}, I_I = -0.5\text{mA}$	-	-	-0.3	V
Input Current	I_I	$V_I = -5\text{V}$	-	-	-0.36	mA
Output Current	$I_{O(\text{off})}$	$V_{CC} = -50\text{V}, V_I = 0\text{V}$	-	-	-0.5	μA
DC Current Gain	G_I	$V_O = -5\text{V}, I_O = -5\text{mA}$	80	-	-	-
Input Resistor	$R_1(R_2)$		15.4	22	28.6	$\text{k}\Omega$
Resistance ratio	R_2/R_1		0.8	1	1.2	-
Gain-Bandwidth Product	f_T	$V_{CE} = -10\text{V}, I_E = 5\text{mA}$ $f = 100\text{MHz}$	-	250	-	MHz

Ratings and Characteristics Curves-DTr1 (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

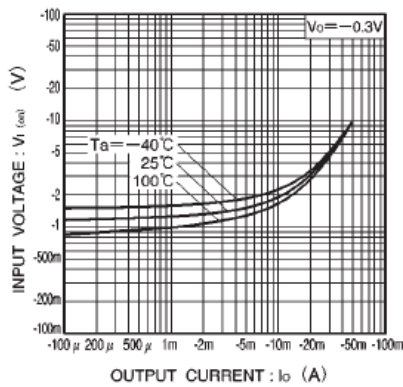


Fig.1 Input voltage vs. output current (ON characteristics)

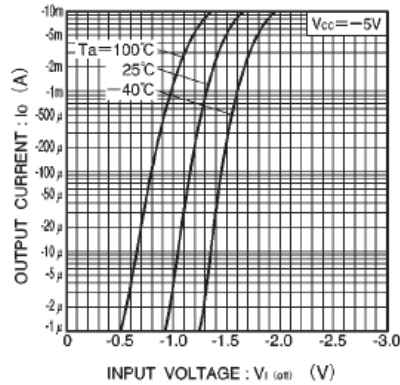


Fig.2 Output current vs. input voltage (OFF characteristics)

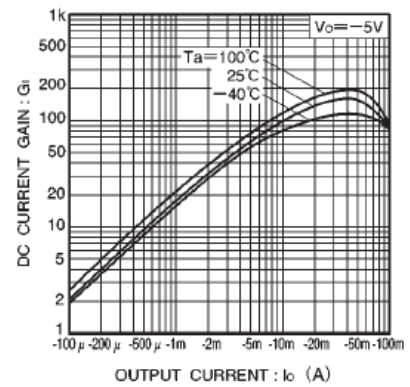


Fig.3 DC current gain vs. output current

Ratings and Characteristics Curves- DTr2 (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

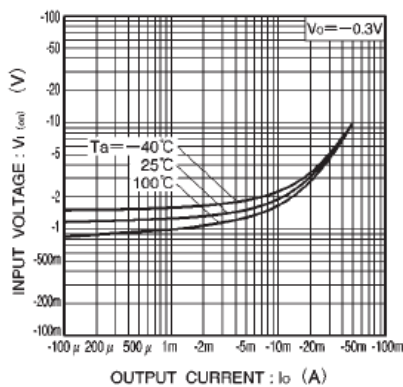


Fig.1 Input voltage vs. output current (ON characteristics)

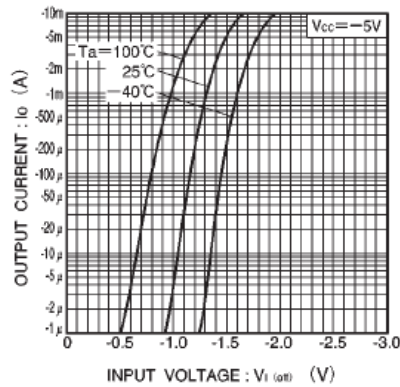


Fig.2 Output current vs. input voltage (OFF characteristics)



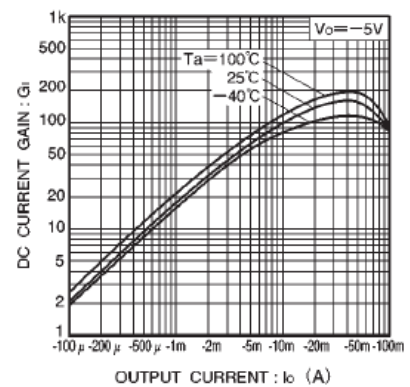


Fig.3 DC current gain vs. output current

Package Outline Dimensions (Unit: mm)

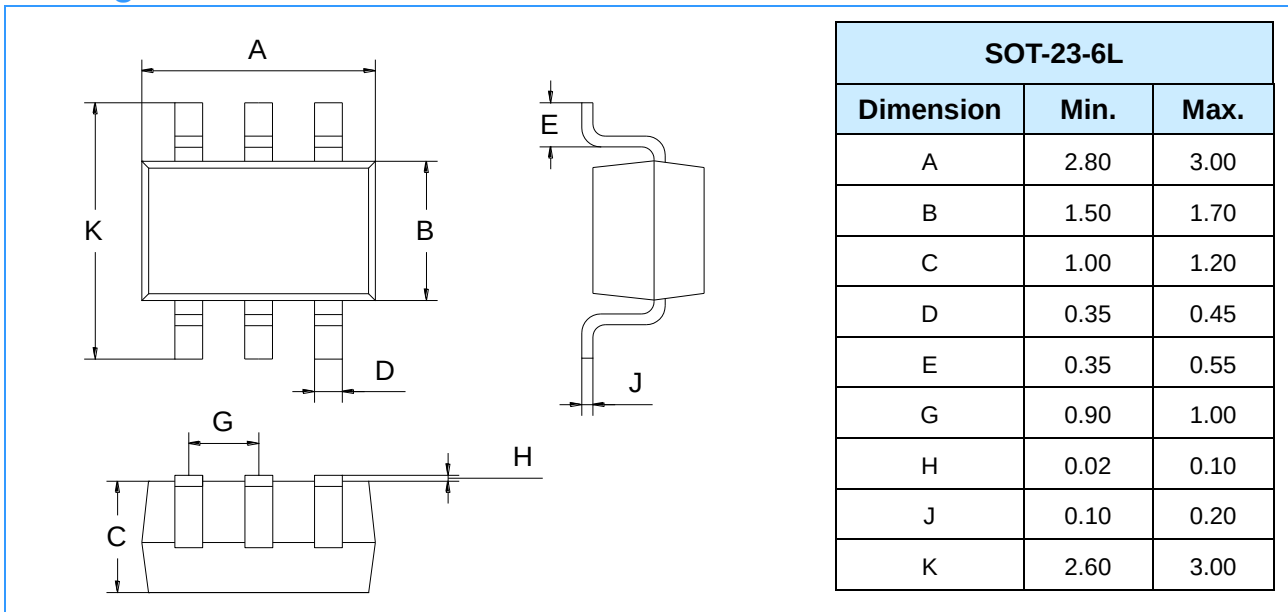

Mounting Pad Layout (Unit: mm)

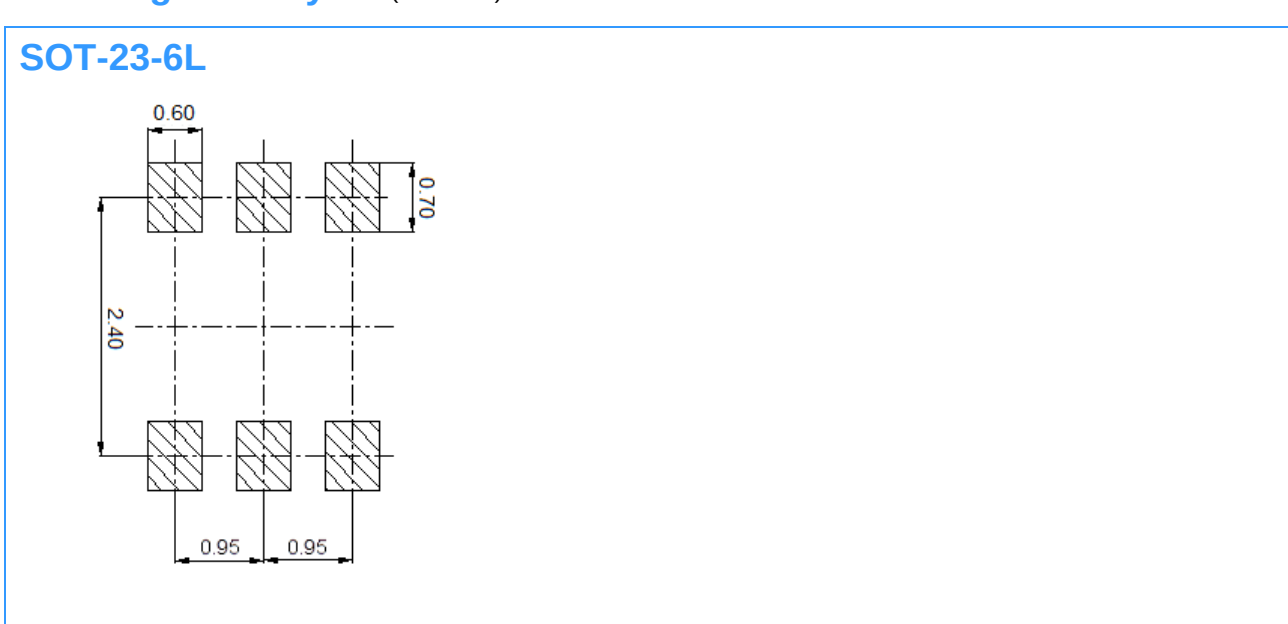

IMPORTANT NOTICE

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.