
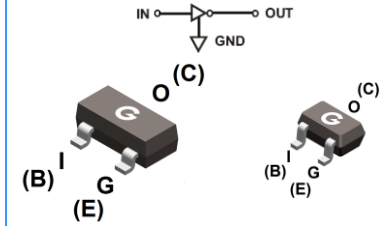


Features

- Epitaxial planar die construction
- Collector Current: 500mA
- Built-in biasing resistors (R_1 : 2.2k Ω , R_2 : 10k Ω)

HF



DTB123YCA
SOT-23

DTB123YUA
SOT-323

Mechanical Data

- Case: SOT-23, SOT-323
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
DTB123YCA	SOT-23	3000 pcs / Tape & Reel	F52
DTB123YUA	SOT-323	3000 pcs / Tape & Reel	F52

Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value		Unit
		SOT-23	SOT-323	
Supply Voltage	V_{CC}	-50		V
Input Voltage	V_I	-12 to 5		V
Output Current	I_O	-500		mA
Power Dissipation	P_D	200	200	mW
Thermal Resistance Junction-to-Air	$R_{\theta JA}$	625	625	$^\circ\text{C/W}$
Junction Temperature Range	T_J	-55 ~ +150		$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ +150		$^\circ\text{C}$

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Voltage	$V_{I(\text{OFF})}$	$V_{CC} = -5\text{V}$, $I_O = -100\mu\text{A}$	-0.3	-	-	V
Input Voltage	$V_{I(\text{ON})}$	$V_O = -0.3\text{V}$, $I_O = -20\text{mA}$	-	-	-2	V
Output Voltage	$V_{O(\text{on})}$	$I_O = -50\text{mA}$, $I_I = -2.5\text{mA}$	-	-	-0.3	V
Input Current	I_I	$V_I = -5\text{V}$	-	-	-3.6	mA
Output Current	$I_{O(\text{off})}$	$V_{CC} = -50\text{V}$, $V_I = 0\text{V}$	-	-	-0.5	μA
DC Current Gain	G_I	$V_O = -5\text{V}$, $I_O = -50\text{mA}$	56	-	-	-
Input Resistor	R_1		1.54	2.2	2.86	k Ω
Resistance ratio	R_2/R_1		3.6	4.5	5.5	-
Gain-Bandwidth Product	f_T	$V_{CE} = -10\text{V}$, $I_E = -50\text{mA}$ $f = 100\text{MHz}$	-	200	-	MHz

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

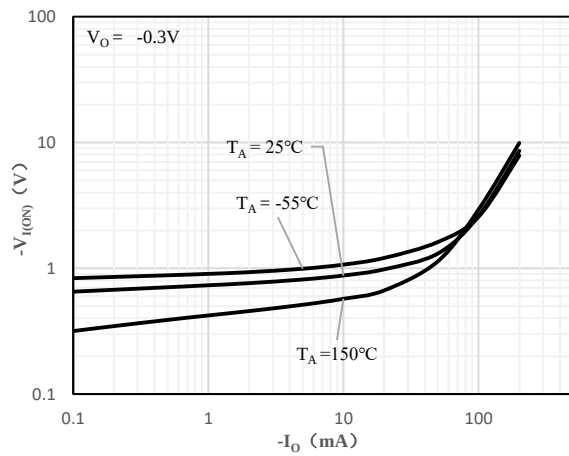


Fig 1 Input Voltage vs Output Current

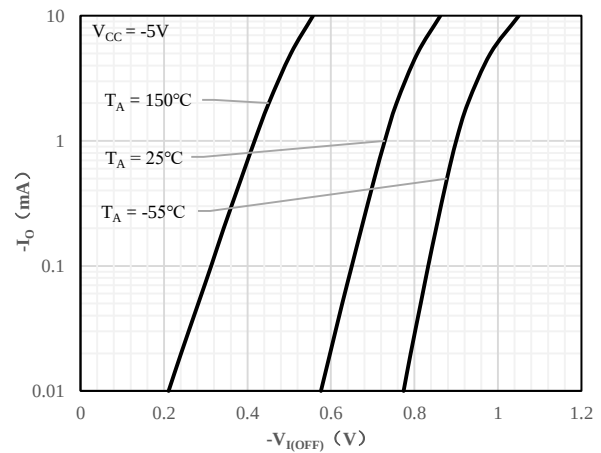


Fig 2 Output Current vs Input Voltage

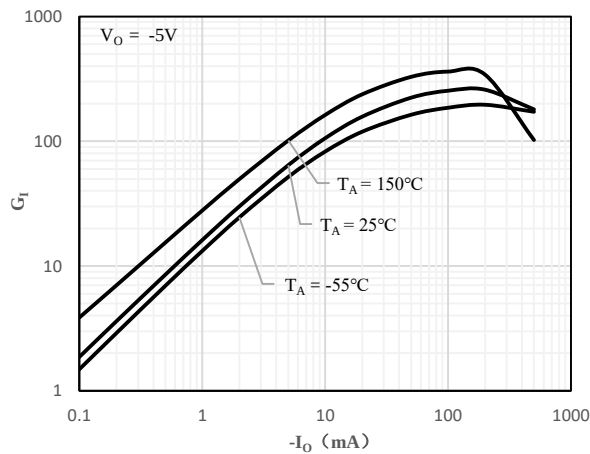


Fig 3 DC Current Gain vs Output Current

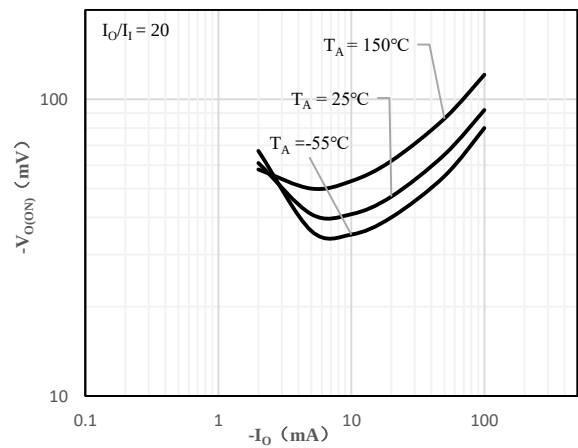


Fig 4 Output Voltage vs Output Current

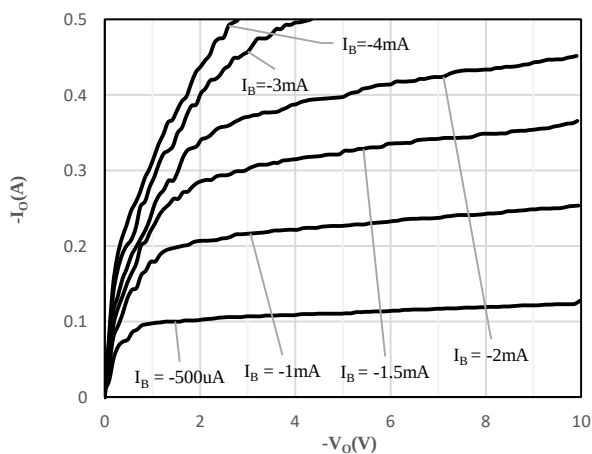


Fig 5 Output Current vs. Output Voltage



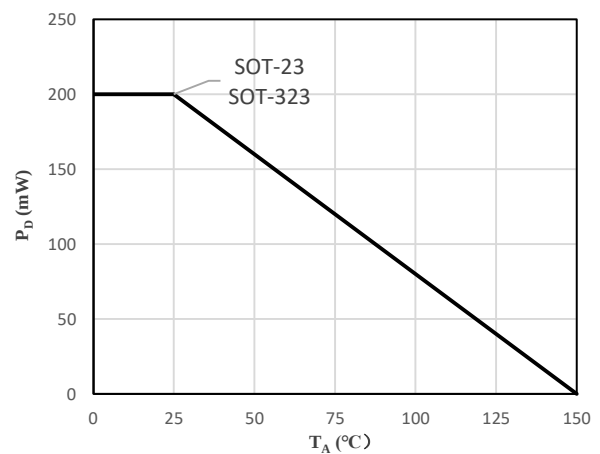


Fig 6 Power Dissipation vs. Air Temperature

Package Outline Dimensions (Unit: mm)

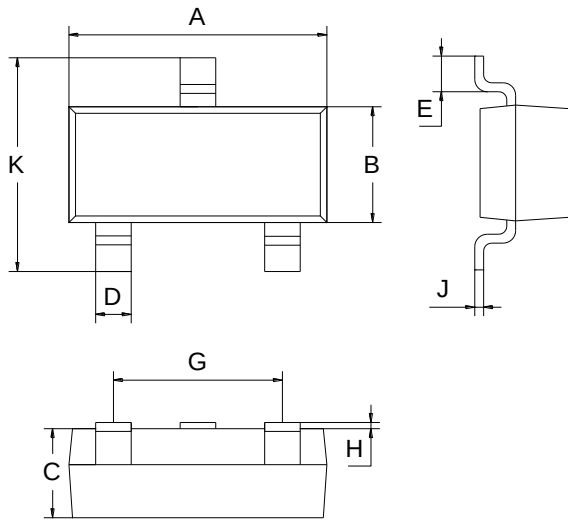


SOT-23		
Dimension	Min.	Max.
A	2.70	3.10
B	1.10	1.50
C	0.90	1.10
D	0.30	0.50
E	0.35	0.48
G	1.80	2.00
H	0.02	0.10
J	0.05	0.15
K	2.20	2.60

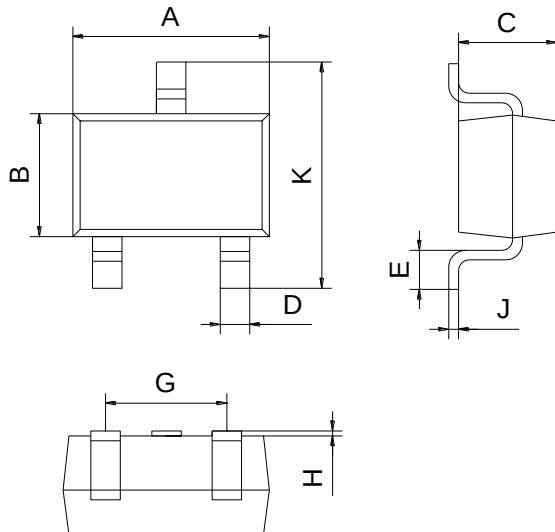


SOT-323		
Dimension	Min.	Max.
A	2.00	2.20
B	1.15	1.35
C	0.90	1.10
D	0.15	0.35
E	0.25	0.40
G	1.20	1.40
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40

Mounting Pad Layout (Unit: mm)

SOT-23

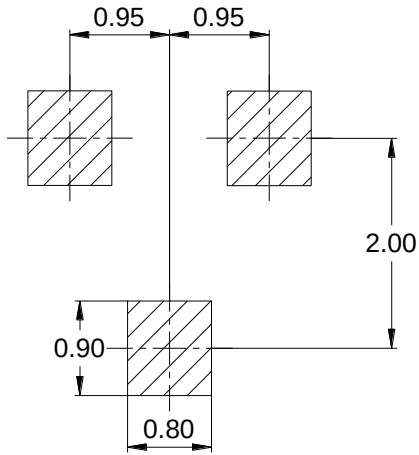

SOT-323

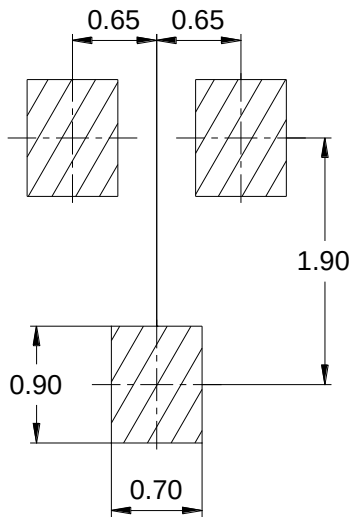

IMPORTANT NOTICE

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.