


PNP Silicon Planar High Voltage Transistor

FMMT558

FEATURES

- Excellent h_{FE} characteristics at $I_C=100mA$
- Complementary To FMMT458
- Low saturation voltage

HF

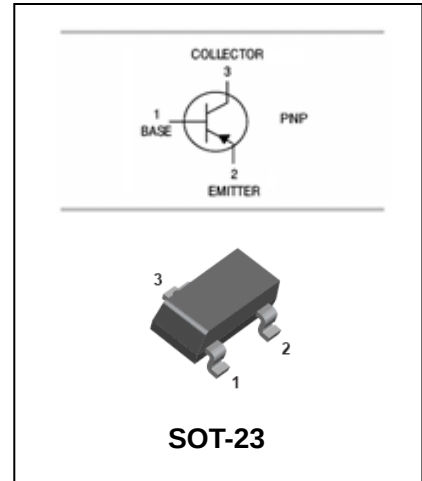

ORDERING INFORMATION

Type No.	Marking	Package Code
FMMT558	558	SOT-23

MAXIMUM RATING @ $T_a=25^{\circ}C$ unless otherwise specified

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	-400	V
V_{CEO}	Collector-Emitter Voltage	-400	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current -Continuous	-150	mA
I_{CM}	Peak Pulse Current	-500	mA
I_B	Base Current	-200	mA
P_D	Power Dissipation	500	mW
T_J, T_{STG}	Junction and Storage Temperature	-55 to +150	$^{\circ}C$

PNP Silicon Planar High Voltage Transistor

FMMT558


ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = -100\mu A, I_E = 0$	-400			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = -10mA, I_B = 0$	-400			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -100\mu A, I_C = 0$	-5			V
Collector cut-off current	I_{CBO}	$V_{CB} = -320V, I_E = 0$			-0.1	μA
Collector cut-off current	I_{CES}	$V_{CE} = -320V, I_B = 0$			-0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = -4V, I_C = 0$			-0.1	μA
DC current gain	h_{FE}	$V_{CE} = -10V, I_C = -1mA$	100			
		$V_{CE} = -10V, I_C = -50mA$	100		300	
		$V_{CE} = -10V, I_C = -100mA$	15			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -20mA, I_B = -2mA$ $I_C = -50mA, I_B = -6mA$			-0.2 -0.5	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = -50mA, I_B = -5mA$			-0.9	V
Base-emitter turn on voltage	$V_{BE(on)}$	$I_C = -50mA, V_{CE} = -10V$			-0.9	V
Transition frequency	f_T	$V_{CE} = -20V, I_C = -10mA$ $f = 20MHz$	50			MHz
Collector output capacitance	C_{ob}	$V_{CB} = -20V, f = 1MHz$			5	pF
Switching times	t_{on}	$I_C = -50mA, V_{CC} = -100V$		95		nS
	t_{off}	$I_{B1} = 5mA, I_{B2} = -10mA$		1600		


PNP Silicon Planar High Voltage Transistor

FMMT558


TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

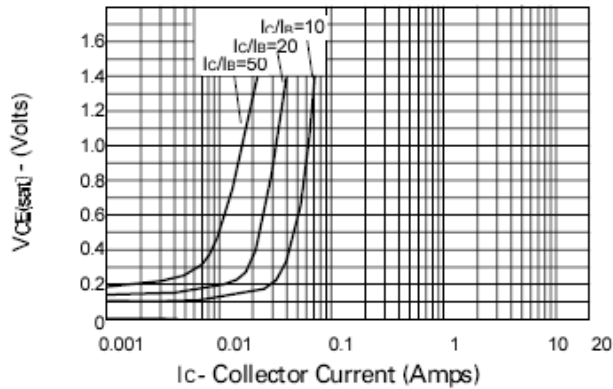


$V_{CE(sat)} v I_C$

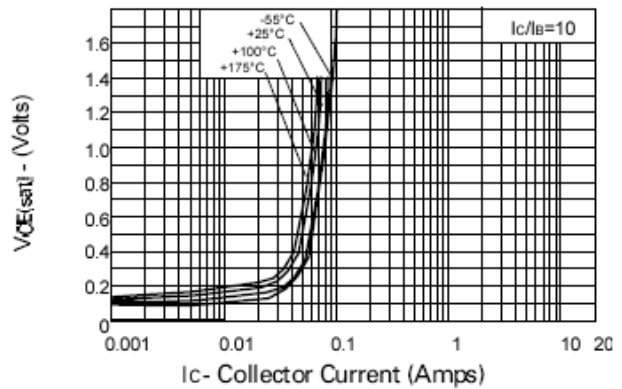


$V_{CE(sat)} v I_C$

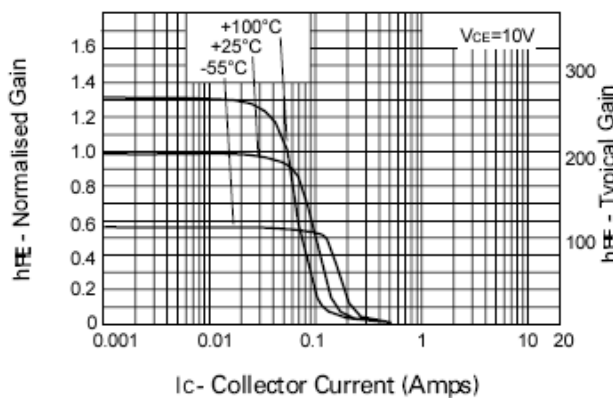


$h_{FE} v I_C$

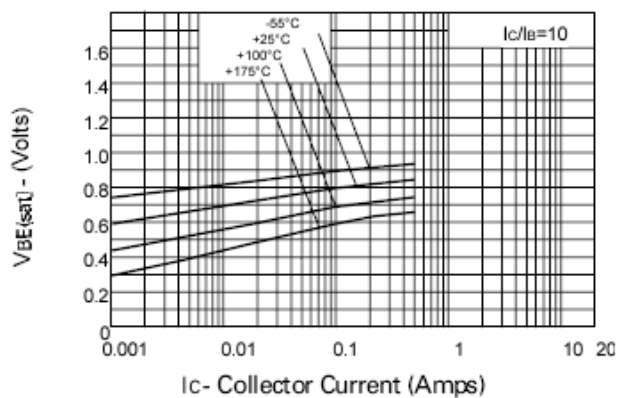

$V_{BE(sat)} v I_C$

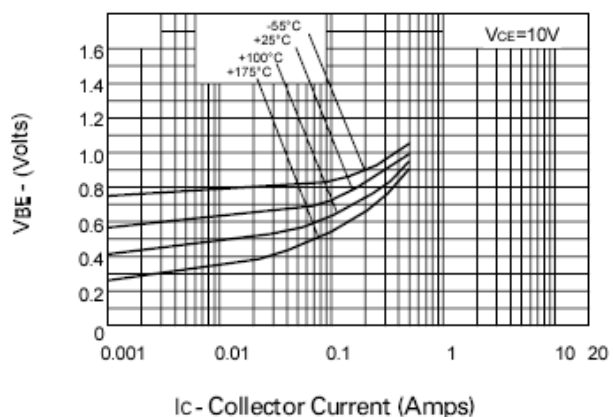

$V_{BE(on)} v I_C$

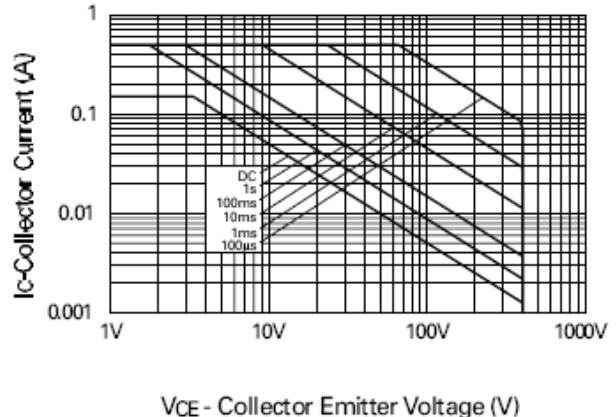

V_{CE} - Collector Emitter Voltage (V)

Safe Operating Area


PNP Silicon Planar High Voltage Transistor

FMMT558


PACKAGE OUTLINE

Plastic surface mounted package

SOT-23

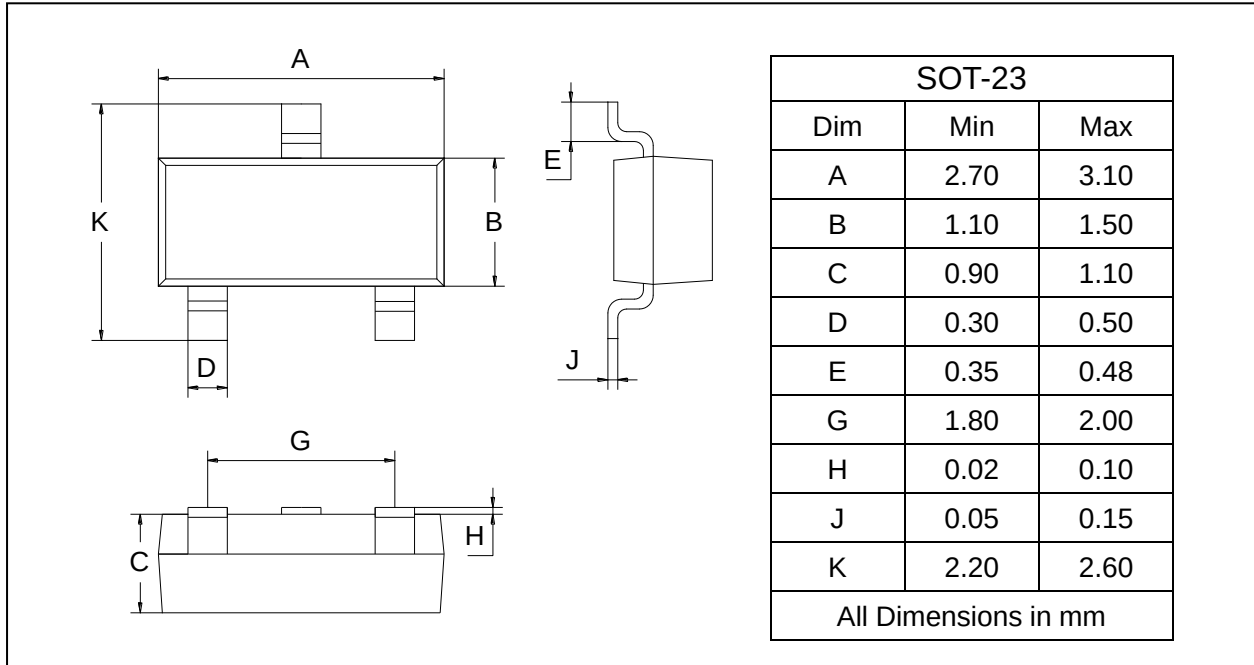

SOLDERING FOOTPRINT

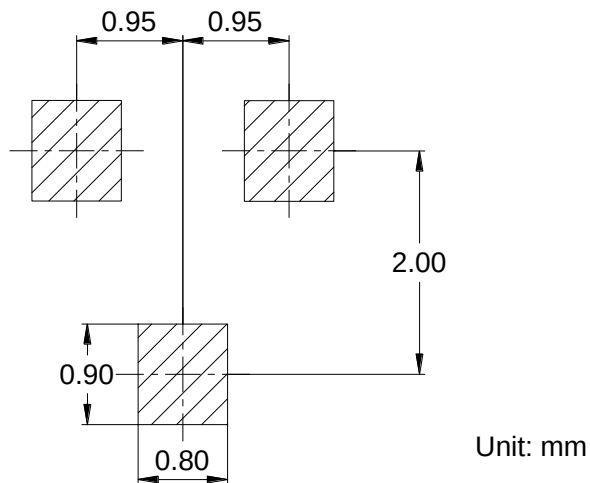

PACKAGE INFORMATION

Device	Package	Shipping
FMMT558	SOT-23	3000 pcs / Tape & Reel