


Features

- Designed to Replace Polymer TVS.
- Protects Up to Two I/O lines.
- Ultra-Low Capacitance (<1pF).
- No Insertion Loss to >3.0GHz.
- Low Leakage Current and Clamping Voltage.
- Low Operating Voltage: 5.0V.
- Solid-state Silicon-avalanche Technology.
- Transient Protection For High-speed Data Lines to
IEC 61000-4-2 (ESD) $\pm 15\text{kV}$ (air), $\pm 8\text{kV}$ (contact)
IEC 61000-4-4 (EFT) 40A (5/50ns)

HF



GESD0502B

SOT-523

Typical Applications

- High-Definition Multimedia Interface (HDMI).
- Mobile Display Digital Interface (MDDI).
- USB 2.0 & Firewire Ports.

Mechanical Data

- Case: SOT-523.
- Molding compound, UL flammability classification rating 94V-0.
- Terminals: Tin plated leads, solderable per MIL-STD-202, Method 208.

Ordering Information

Part Number	Package	Shipping	Marking Code
GESD0502B	SOT-523	3000pcs / Tape & Reel	P5

Maximum Ratings (@ $T_A=25^\circ\text{C}$ unless otherwise specified)

Characteristic	Symbol	Value	Units
Electrostatic discharge voltage (IEC 61000-4-2 contact discharge) (IEC 61000-4-2 air discharge)	BV_{ESD}	± 8 ± 15	KV
Peak pulse power dissipation($t_p=8/20\mu\text{s}$)	P_{PP}	125	W
Peak pulse current($t_p=8/20\mu\text{s}$)	I_{PP}	5	A

Thermal Characteristics

Parameter	Symbol	Value	Units
Junction temperature	T_J	125	$^\circ\text{C}$
Storage and operating temperature	T_{STG} T_{amb}	-55 to +150	$^\circ\text{C}$

Electrical Characteristics (@T_A=25°C unless otherwise specified)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Reverse Stand-Off Voltage	V _{RWM}	Pin 1 or Pin 2 to Pin 3 and Between Pins 1 and 2	-	-	5	V
Reverse Breakdown Voltage	V _{BR}	I _R =1mA Pin 1 or Pin 2 to Pin 3 and Between Pins 1 and 2	6	-	-	V
Reverse Leakage Current	I _R	V _{RWM} =5V Pin 1 or Pin 2 to Pin 3 and Between Pins 1 and 2	-	-	1	uA
Clamping Voltage	V _C	I _{PP} = 1A, t _p = 8/20μs Pin 1 to Pin 2	-	-	15	V
		I _{PP} = 5A, t _p = 8/20μs Pin 1 or Pin 2 to Pin 3			22	V
		I _{PP} = 5A, t _p = 8/20μs Pin 1 to Pin 2			25	V
Diode Capacitance	C _J	V _R =0V, f=1MHz Pin 1 to Pin 2	-	0.6	0.9	pF
		V _R =0V, f=1MHz Pin 1 or Pin 2 to Pin 3	-	-	1.2	

Ratings and Characteristic Curves (T_A=25°C unless otherwise noted)

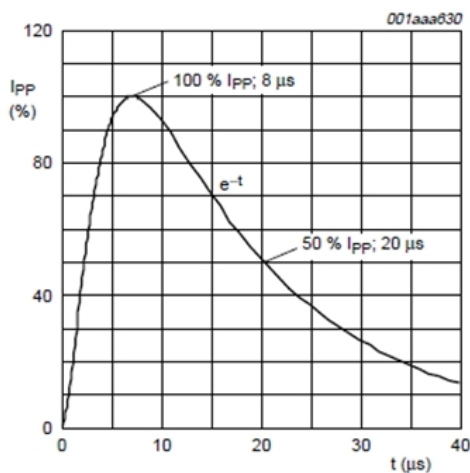


Fig1. 8/20us pulse waveform according to
IEC61000-4-5


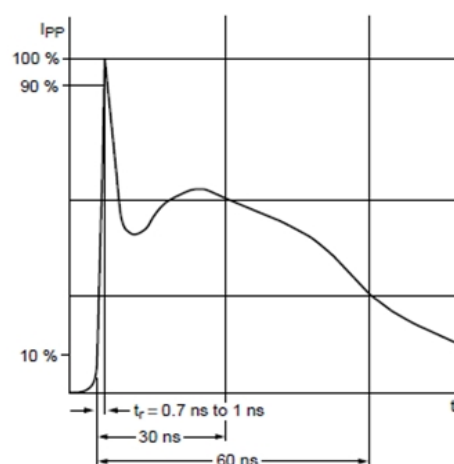


Fig2. ESD pulse waveform according to
IEC61000-4-2

Package Outline Dimensions(unit:mm)


SOT-523

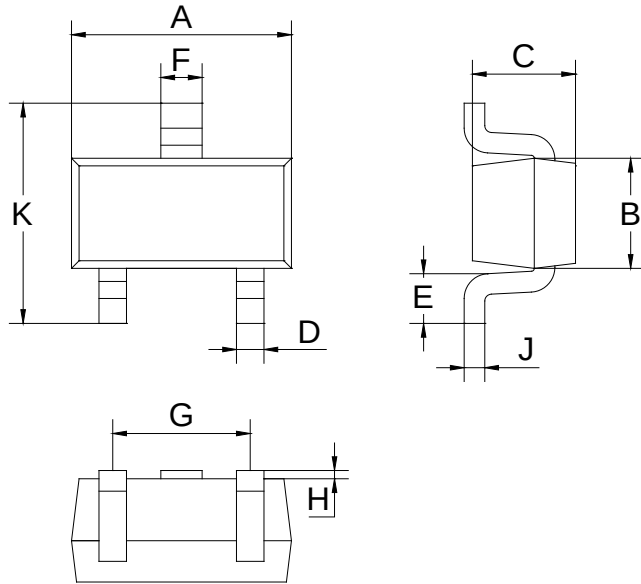

SOT-523		
Dim	Min	Max
A	1.50	1.70
B	0.75	0.85
C	0.60	0.80
D	0.15	0.30
E	0.30	0.40
F	0.25	0.40
G	0.90	1.10
H	0.02	0.10
J	0.08	0.18
K	1.45	1.75

Mounting Pad Layout(unit:mm)

SOT-523

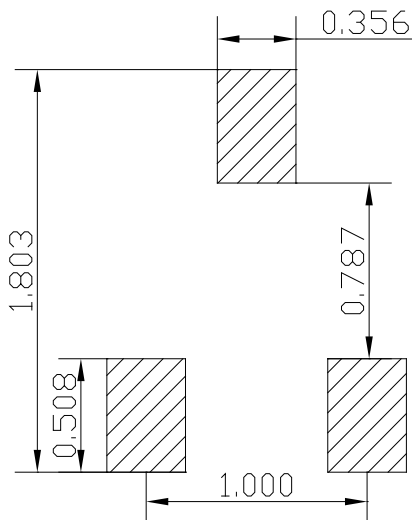

IMPORTANT NOTICE

Galaxy Microelectronics (GME) reserves the right to make changes without further notice to any product herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.