

Features

- Low operating voltage
- Ultra low leakage
- Low clamping voltage



Mechanical Data

- Case: DFN1006-2
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte Tin-Plated Leads, Solderability-per MIL-STD-202, Method 208



DFN1006-2

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
GESD33VBL□	DFN1006-2	10000pcs / Tape & Reel	33B

Note for □: none is for Lead-free package
"G" is for Halogen Free package.

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (t _p = 8 / 20μs)	P _{PK}	300	W
Peak Pulse Current (t _p = 8 / 20μs)	I _{PP}	4	A
Reverse Working Voltage	V _{RWM}	33	V
ESD According to IEC61000-4-2 Air	V _{ESD}	±30	KV
ESD According to IEC61000-4-2 Contact Discharge	V _{ESD}	±30	KV

Thermal Characteristics

Parameter	Symbol	Value	Unit
Operating Junction Temperature Range	T _J	-55 to +125	°C
Storage Temperature Range	T _{STG}	-55 to +150	°C

Electrical Characteristics (@ T_A = 25°C unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
V _{BR}	Reverse Breakdown Voltage	I _T = 1mA	35	-	40	V
I _R	Reverse Leakage Current	V _{RWM} = 33V	-	-	500	nA
V _C	Clamping Voltage	I _{PP} = 4A, t _p = 8/20μs	-	-	75	V
C _J	Junction Capacitance	V _R = 0V, f = 1.0MHz	-	-	30	pF

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

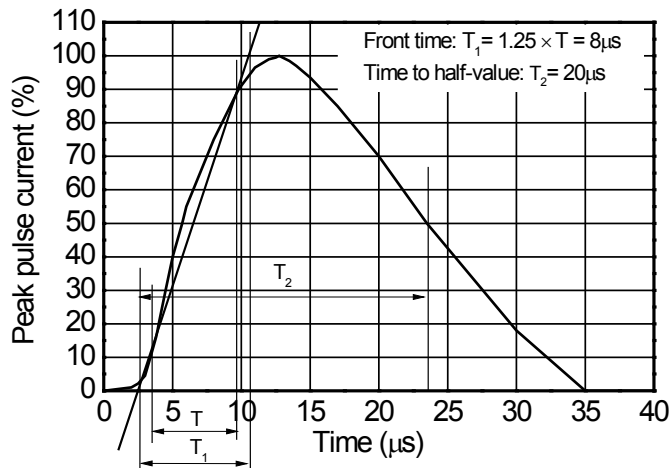


Fig1. 8/20 μs waveform per IEC61000-4-5

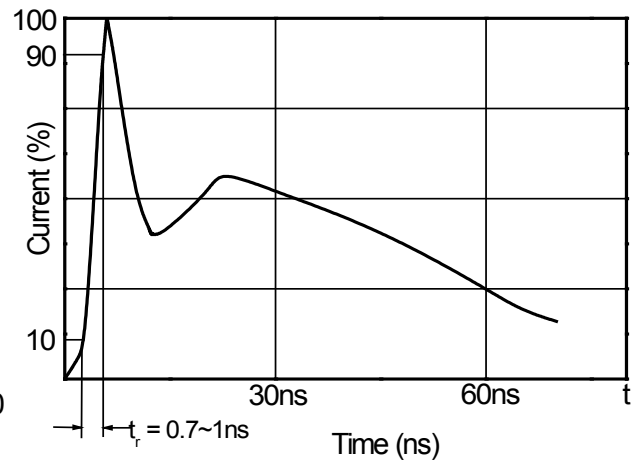


Fig2. ESD pulse waveform according to IEC61000-4-2


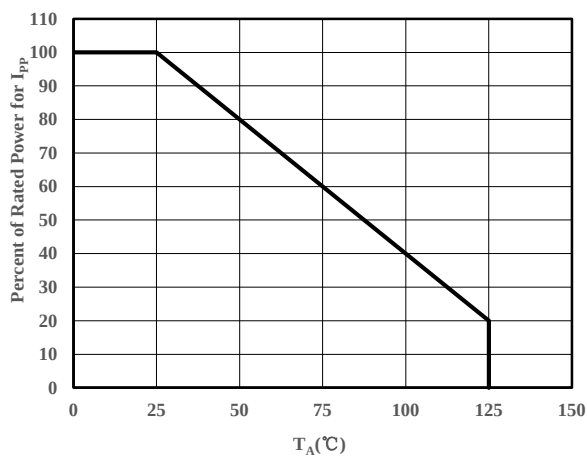


Fig3. Power Derating Curve


Package Outline Dimensions (Unit: mm)

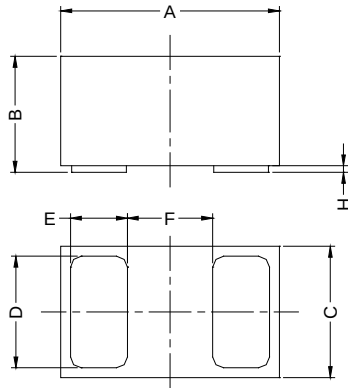

DFN1006-2		
Dimension	Min.	Max.
A	0.95	1.00
B	0.47	0.50
C	0.55	0.60
D	0.45	0.50
E	0.20	0.25
F	-	0.40
H	0	0.03

Mounting Pad Layout (Unit: mm)

DFN1006-2

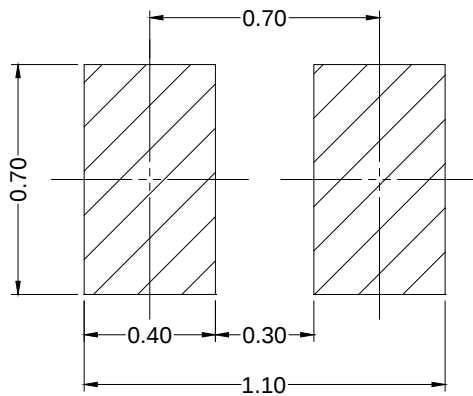

IMPORTANT NOTICE

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.