


Schottky Barrier Rectifier

GVS58F - GVS510F

Features

- Metal silicon junction, majority carrier conduction
- High forward surge current capability
- Low forward voltage drop
- High temperature soldering guaranteed: 260°C @ 10s
- Robust guarding for over voltage protection
- RoHS compliant with Halogen-free

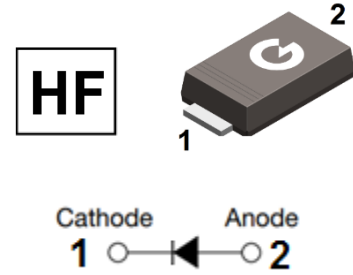

Mechanical Data

- Case: SMAF molded plastic
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Matte tin plated leads; solderable per J-STD-002 and JESD22-B102
- Polarity: Color band denotes cathode end

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	GVS58F	GVS59F	GVS510F	Unit
Peak Repetitive Reverse Voltage	V _{RRM}	80	90	100	V
RMS Reverse Voltage	V _{RMS}	56	63	70	V
DC Blocking Voltage	V _{DC}	80	90	100	V
Average Forward Output Current	I _{F_AV}	5.0			A
Peak Forward Surge Current, 8.3ms Single Half Sine wave	I _{FSM}	120			A

Thermal Characteristics

Parameter	Symbol	GVS58F	GVS59F	GVS510F	Unit
Typical Thermal Resistance *1	R _{ΘJA}	78			°C/W
	R _{ΘJC}	20			
	R _{ΘJL}	18			
Operating Junction Temperature Range	T _J	-55 ~ +150			°C
Storage Temperature Range	T _{STG}	-55 ~ +150			°C

Note 1: Device mounted on p.c.b. with 10 mm x 20 mm x 0.1 mm copper pad area

Schottky Barrier Rectifier

GVS58F - GVS510F

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions		Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage	$V_{(BR)}$	$I_R = 100\mu\text{A}$, GVS58F		80	-	-	V
		$I_R = 100\mu\text{A}$, GVS59F		90	-	-	V
		$I_R = 100\mu\text{A}$, GVS510F		100	-	-	V
Instantaneous Forward Voltage* ¹	V_F	$I_F = 5.0\text{A}$	@ $T_A = 25^\circ\text{C}$	-	-	0.7	V
Reverse Current* ²	I_R	Rated	@ $T_J = 25^\circ\text{C}$	-	-	250	μA
		V_R	@ $T_J = 100^\circ\text{C}$	-	-	20	mA

Note 1: Pulse test: 300us pulse width, 1 % duty cycle

Note 2: Pulse test: Pulse width 40ms

Schottky Barrier Rectifier

GVS58F - GVS510F

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 Forward Current Derating Curve

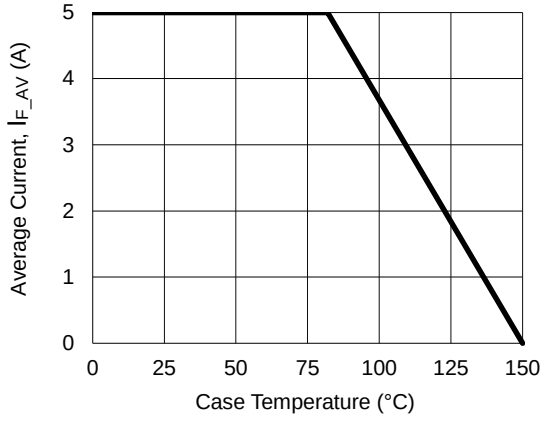


Fig. 2 Surge Current Derating Curve

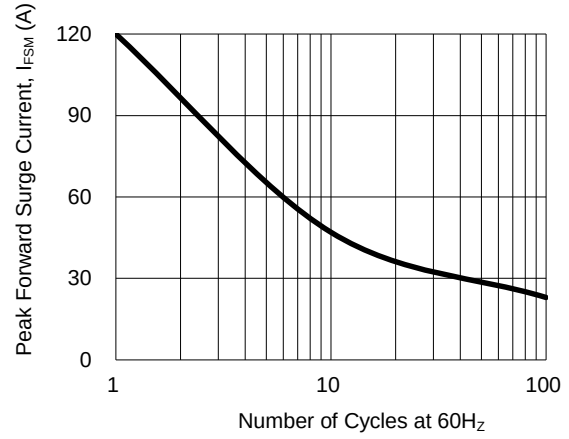


Fig. 3 Typical Forward Voltage Characteristics


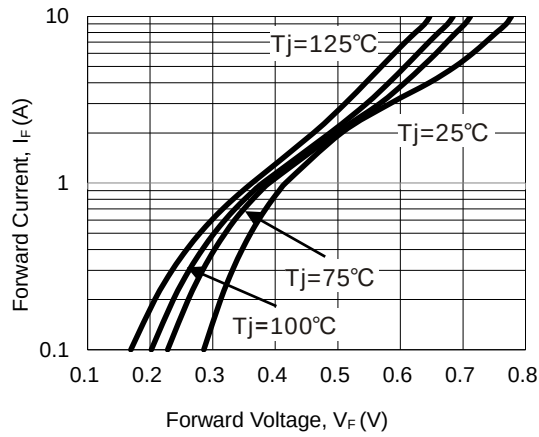



Fig. 4 Typical Reverse Characteristics

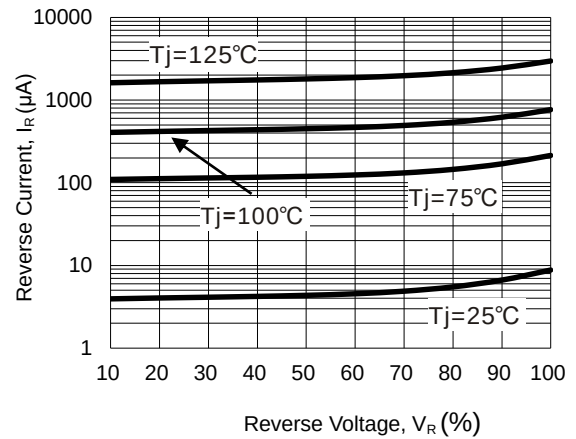


Schottky Barrier Rectifier

GVS58F - GVS510F

Package Outline Dimensions (Unit: mm)

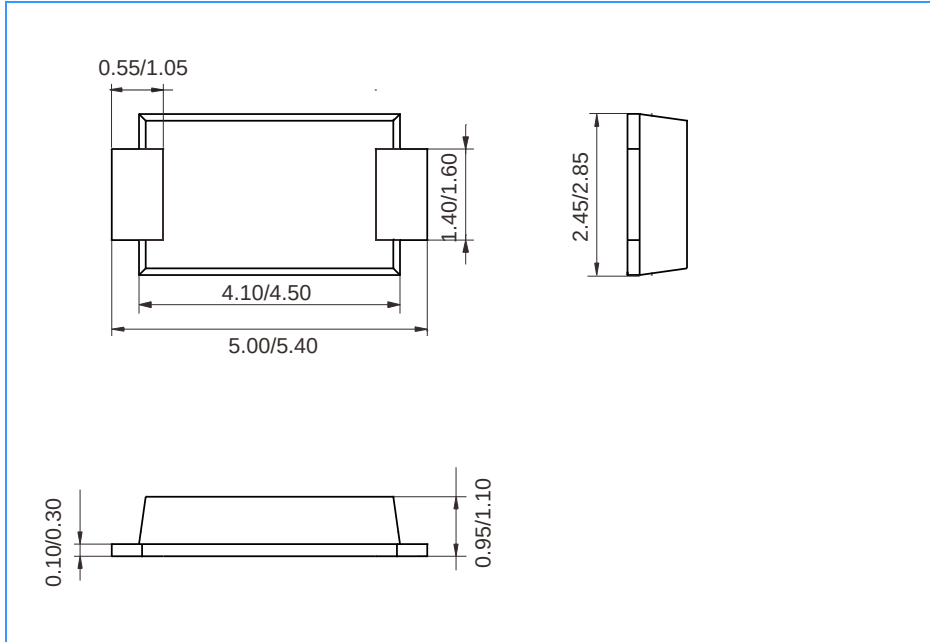

Mounting Pad Layout (Unit: mm)

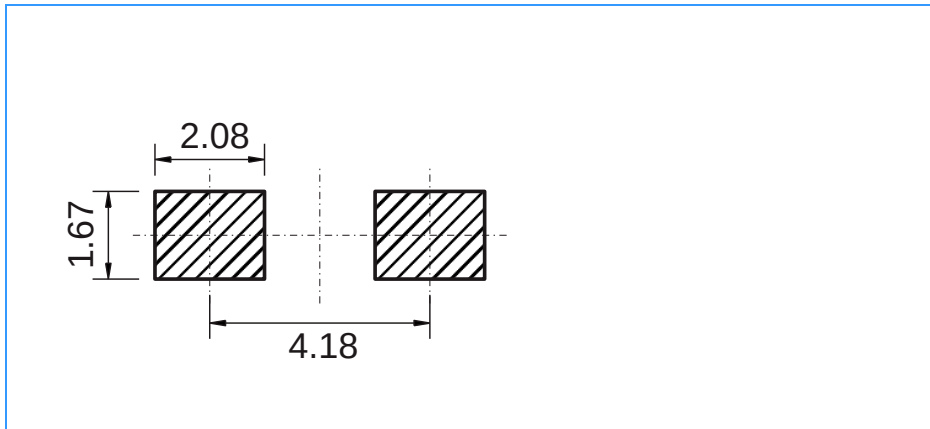

Ordering Information

Part Number	Marking	Package	Shipping Quantity
GVS58F	GVS58F	SMAF	10 kpcs / Tape & Reel
GVS59F	GVS59F	SMAF	10 kpcs / Tape & Reel
GVS510F	GVS5AF	SMAF	10 kpcs / Tape & Reel