



Features

- Low current
- Low voltage
- RoHS compliant with Halogen-free

HF

Mechanical Data

- Case: SOT-723
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Tin-plated; solderability per MIL-STD-202, Method 208



SOT-723

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
KTA2014M	SOT-723	10000 pcs / Tape & Reel	3F

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	V _{CBO}	-50	V
Collector-Emitter Voltage	V _{CEO}	-45	V
Emitter-Base Voltage	V _{EBO}	-5	V
Collector Current (Continuous)	I _C	-150	mA

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation (Collector) (Note 1)	P _D	265	mW
Thermal Resistance (Junction-to-Ambient) (Note 1)	R _{θJA}	472	°C/W
Operating Junction Temperature	T _J	-55 ~ +150	°C
Storage Temperature Range	T _{STG}	-55 ~ +150	°C


Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = -10\mu\text{A}, I_E = 0$	-50	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = -10\text{mA}, I_B = 0$	-45	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = -1\mu\text{A}, I_C = 0$	-5	-	-	V
Collector Cut-off Current	I_{CBO}	$V_{CB} = -30\text{V}, I_E = 0$	-	-1	-15	nA
Emitter-base Cut-off Current	I_{EBO}	$V_{EB} = -5\text{V}, I_C = 0$	-	-	-100	nA
Collector-emitter Cut-off Current	I_{CEO}	$V_{CE} = -30\text{V}, I_B = 0$	-	-	-1	mA
DC Current Gain	h_{FE}	$V_{CE} = -5\text{V}, I_C = -2\text{mA}$	220	-	475	-
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -10\text{mA}, I_B = -0.5\text{mA}$	-	-	-0.3	V
		$I_C = -100\text{mA}, I_B = -5\text{mA}$	-	-	-0.65	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = -10\text{mA}, I_B = -0.5\text{mA}$	-	-0.70	-	V
		$I_C = -100\text{mA}, I_B = -5\text{mA}$	-	-0.85	-	V
Base-Emitter Voltage	$V_{BE(ON)}$	$V_{CE} = -5\text{V}, I_C = -2\text{mA}$	-0.6	-0.65	-0.75	V
		$V_{CE} = -5\text{V}, I_C = -10\text{mA}$	-	-	-0.82	V
Transition Frequency	f_T	$V_{CE} = -5\text{V}, I_C = -10\text{mA}$ $f = 100\text{MHz}$	100	-	-	MHz

Note:


1. Device mounted on FR-5 = 1.0 X 0.75 X 0.062 inch.

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

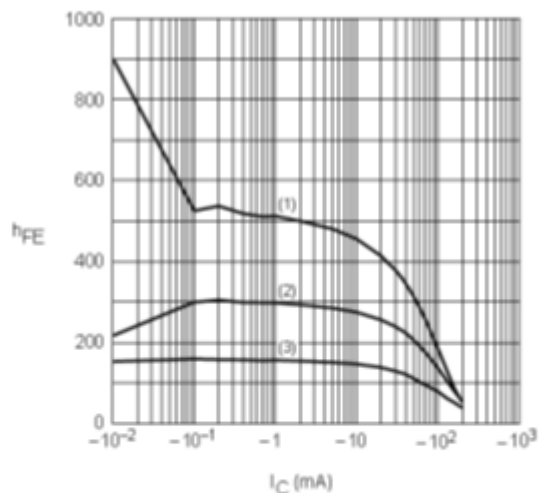


$V_{CE} = -5\text{ V}$.
(1) $T_{amb} = 150^\circ\text{C}$.
(2) $T_{amb} = 25^\circ\text{C}$.
(3) $T_{amb} = -55^\circ\text{C}$.

Fig.1 DC current gain as a function of collector current; typical values.

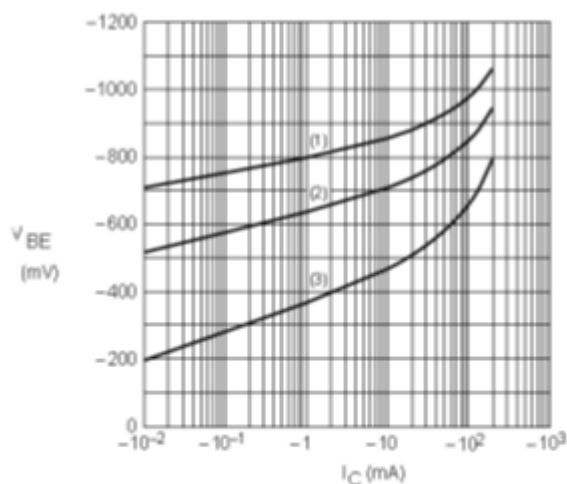


$V_{CE} = -5\text{ V}$.
(1) $T_{amb} = -55^\circ\text{C}$.
(2) $T_{amb} = 25^\circ\text{C}$.
(3) $T_{amb} = 150^\circ\text{C}$.

Fig.2 Base-emitter voltage as a function of collector current; typical values.

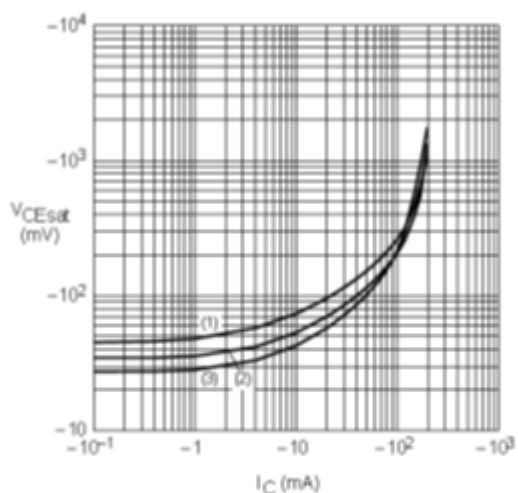

$I_C/I_B = 20$.
(1) $T_{amb} = 150^\circ\text{C}$.
(2) $T_{amb} = 25^\circ\text{C}$.
(3) $T_{amb} = -55^\circ\text{C}$.


Fig.3 Collector-emitter saturation voltage as a function of collector current; typical values.

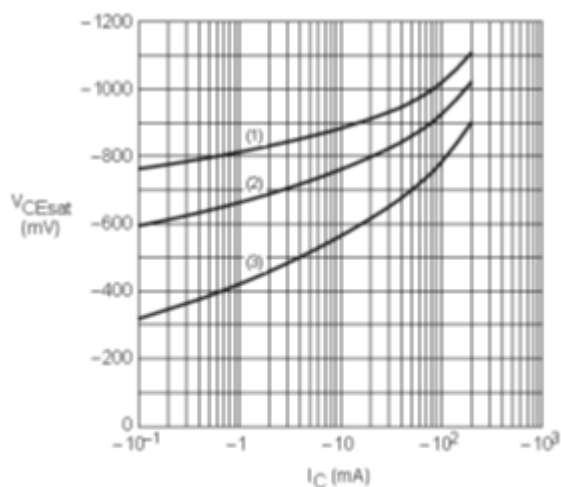

$I_C/I_B = 20$.
(1) $T_{amb} = -55^\circ\text{C}$.
(2) $T_{amb} = 25^\circ\text{C}$.
(3) $T_{amb} = 150^\circ\text{C}$.

Fig.4 Base-emitter saturation voltage as a function of collector current; typical values.

Package Outline Dimensions (Unit: mm)

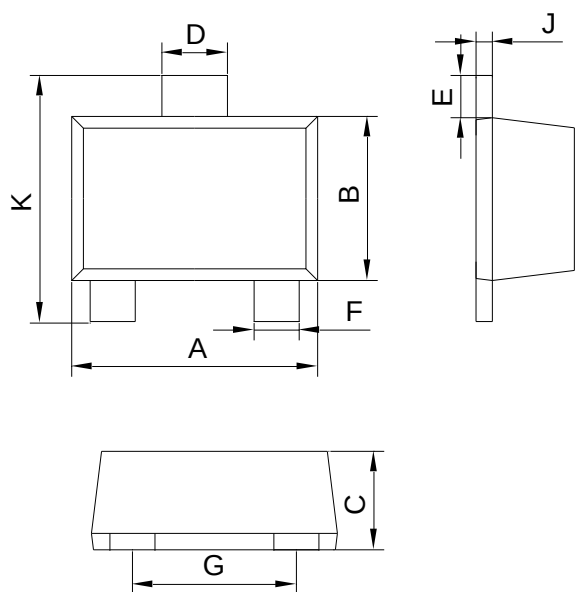

SOT-723		
Dimension	Min.	Max.
A	1.10	1.30
B	0.70	0.90
C	0.40	0.54
D	0.22	0.42
E	0.10	0.30
F	0.12	0.32
G	0.70	0.90
J	0.08	0.15
K	1.10	1.30

Package Outline Dimensions (Unit: mm)

SOT-723

