NPN Silicon Epitaxial Planar Transistor

MMBT5550


Features


- Epitaxial planar die construction

HF

Mechanical Data

- Case: SOT-23
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Tin-plated; solderability per MIL-STD-202, Method 208





SOT-23

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
MMBT5550	SOT-23	3000 pcs / Tape & Reel	M1F

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	V_{CBO}	160	V
Collector-Emitter Breakdown Voltage	V_{CEO}	140	V
Emitter-Base Breakdown Voltage	V_{EBO}	6	V
Collector Current (Continuous)	I_C	0.6	A
Collector Current (Peak)	I_{CM}	0.8	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P_D	0.3	W
Thermal Resistance Junction-to-Air *1	$R_{\theta JA}$	396	°C/W
Thermal Resistance Junction-to-Case *1	$R_{\theta JC}$	213	°C/W
Thermal Resistance Junction-to-Lead *1	$R_{\theta JL}$	186	°C/W
Junction Temperature Range	T_J	-55 ~ +150	°C
Storage Temperature Range	T_{STG}	-55 ~ +150	°C

Note 1: The data tested by surface mounted on a 15mm * 15mm * 1mm FR4-epoxy P.C.B

Electrical Characteristics (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	I_C = 100μA, I_E = 0	160	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	I_C = 0.1mA, I_B = 0	140	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	I_E = 10μA, I_C = 0	6	-	-	V
Collector Cut-off Current	I_{CBO}	V_{CB} = 100V, I_E = 0	-	-	100	nA
Emitter Cut-off Current	I_{EBO}	V_{EB} = 4V, I_C = 0	-	-	50	nA
DC Current Gain	h_{FE}	V_{CE} = 5V, I_C = 1mA	60	-	-	-
		V_{CE} = 5V, I_C = 10mA	60	-	250	-
		V_{CE} = 5V, I_C = 50mA	20	-	-	-
Collector-emitter Saturation Voltage	$V_{CE(sat)}$	I_C = 10mA, I_B = 1mA	-	-	0.15	V
		I_C = 50mA, I_B = 5mA	-	-	0.25	V
Base-emitter Saturation Voltage	$V_{BE(sat)}$	I_C = 10mA, I_B = 1mA	-	-	1.0	V
		I_C = 50mA, I_B = 5mA	-	-	1.2	V
Collector-base Output Capacitance	C_{cbo}	V_{CB} = 10V, f = 1MHz	-	-	6	pF
Current-Gain— Bandwidth Product	f_T	I_C = 10mA, V_{CE} = 10V f = 100MHz	100	300	-	MHz

Ratings and Characteristics Curves (@ T_A = 25°C unless otherwise specified)

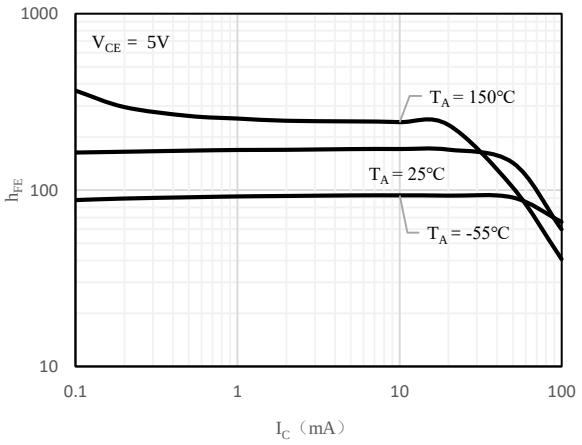


Fig 1 h_{FE} vs. I_C

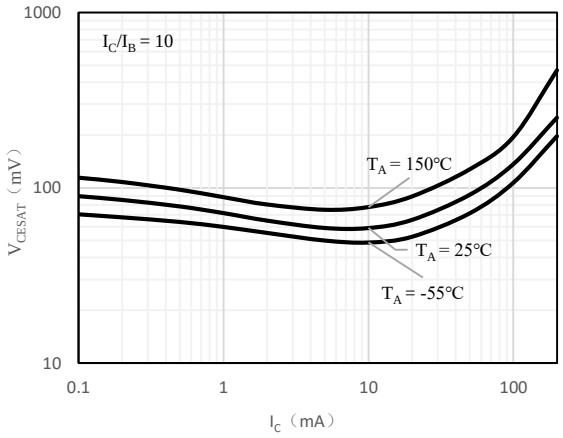


Fig 2 $V_{CE(sat)}$ vs. I_C

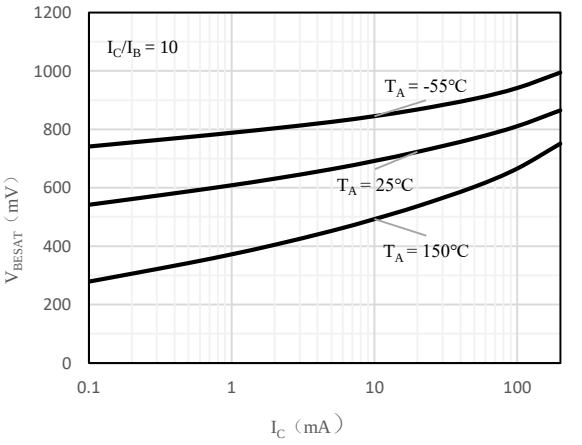


Fig 3 $V_{BE(sat)}$ vs. I_C


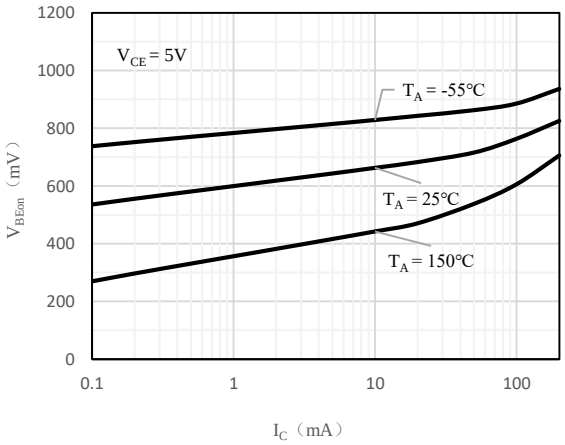


Fig 4 $V_{BE(ON)}$ vs. I_C


Package Outline Dimensions (Unit: mm)

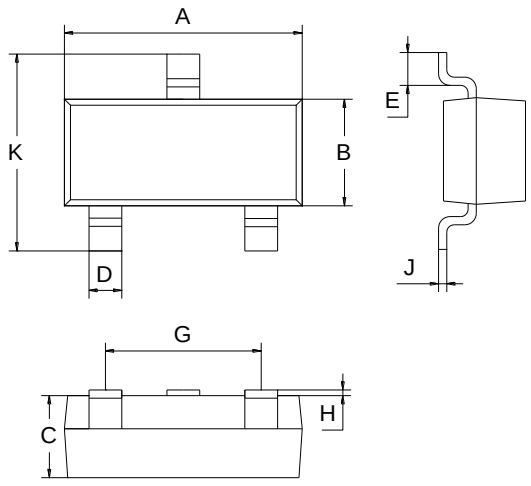

SOT-23		
Dimension	**Min.**	**Max.**
A	2.70	3.10
B	1.10	1.50
C	0.90	1.10
D	0.30	0.50
E	0.35	0.48
G	1.80	2.00
H	0.02	0.10
J	0.05	0.15
K	2.20	2.60

Package Outline Dimensions (Unit: mm)

SOT-23

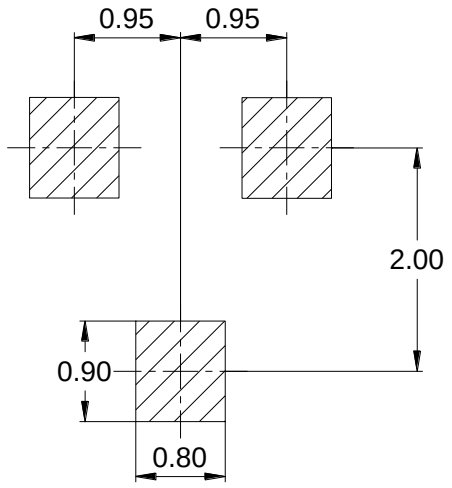

IMPORTANT NOTICE

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.