



Features

- Tight voltage tolerance: $\pm 2\%$
- Ultra low-profile package well suited for automated assembly
- Moisture sensitivity level 1
- RoHS compliant with Halogen-free

HF

Mechanical Data

- Case: SOT-23
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208



SOT-23

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
MMBZ5247A	SOT-23	3000 pcs / Tape & Reel	J2.

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P_D	350	mW
Thermal Resistance Junction-to-Air ^{*1}	$R_{\theta JA}$	316	$^{\circ}\text{C/W}$
Thermal Resistance Junction-to-Case ^{*1}	$R_{\theta JC}$	172	$^{\circ}\text{C/W}$
Thermal Resistance Junction-to-Lead ^{*1}	$R_{\theta JL}$	160	$^{\circ}\text{C/W}$
Operating Junction Temperature Range	T_J	-55 ~ +150	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-65 ~ +150	$^{\circ}\text{C}$

Note 1: The data tested by surface mounted on a 15mm * 15mm * 1mm FR4-epoxy P.C.B

Electrical Characteristics (@ $T_A = 25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Zener Voltage	V_Z	$I_{ZT} = 7.5\text{mA}$	16.66	17.00	17.34	V
Forward Voltage	V_F	$I_F = 10\text{mA}$	-	-	0.9	V
Maximum Reverse Current	I_R	$V_R = 13\text{V}$	-	-	0.1	μA
Maximum Zener Impedance	Z_{ZT}	$I_{ZT} = 7.5\text{mA}$	-	-	19	Ω
Maximum Zener Impedance	Z_{ZK}	$I_{ZK} = 0.25\text{mA}$	-	-	600	Ω
Temperature Coefficient	T_C	$I_{ZT} = 7.5\text{mA}$	-	1.44	-	$\text{mV}/^{\circ}\text{C}$

TYPICAL CHARACTERISTICS (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

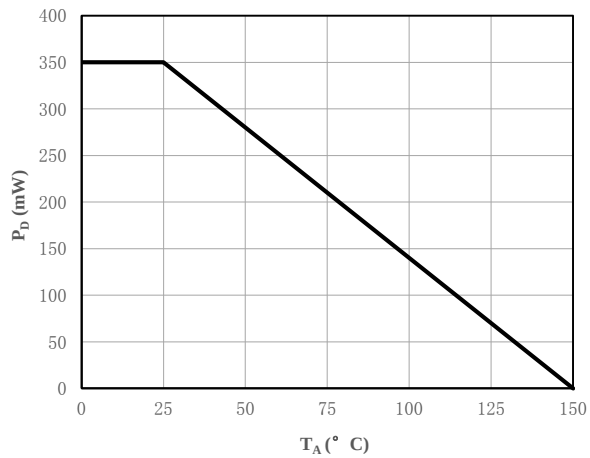


Fig 1 Steady State Power Derating

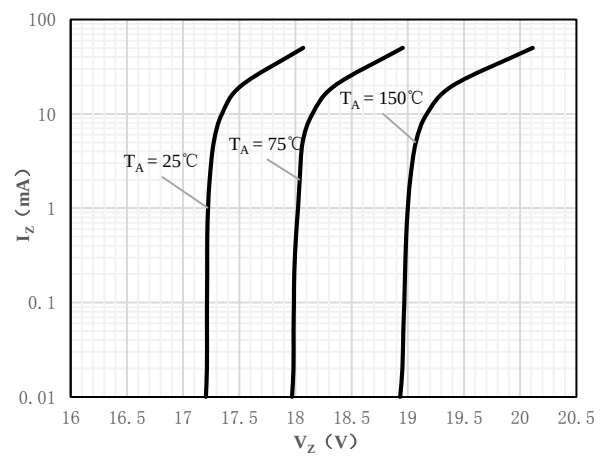


Fig 2 Typical Zener Breakdown Characteristics

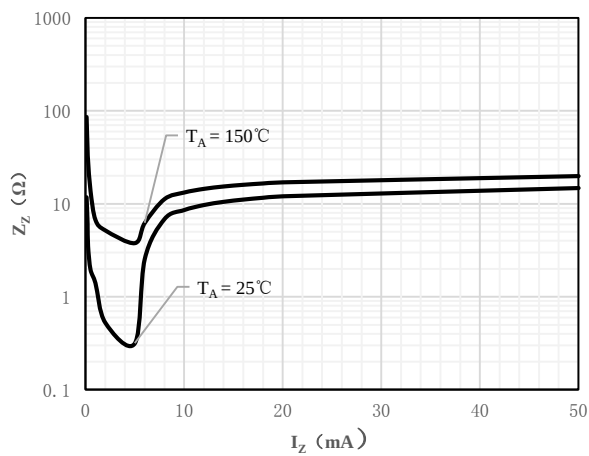


Fig 3 Zener Impedance vs. Zener Current

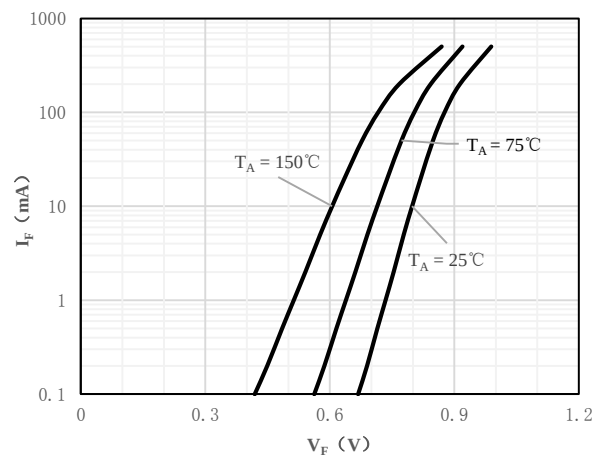


Fig 4 Typical Forward Characteristics


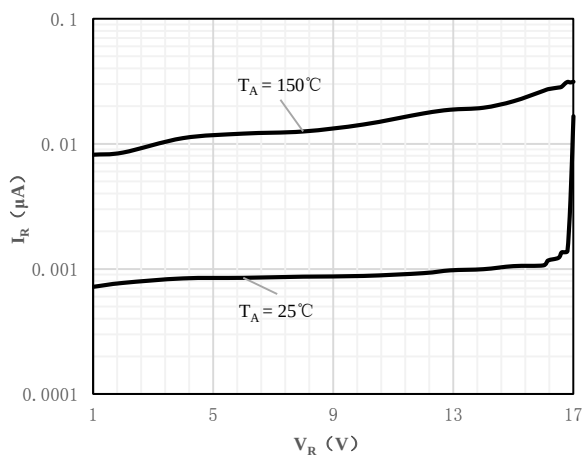


Fig 5 Typical Reverse Characteristics

Package Outline Dimensions (Unit: mm)

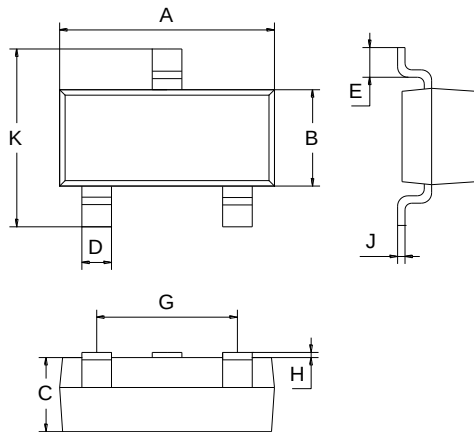

SOT-23		
Dimension	Min.	Max.
A	2.70	3.10
B	1.10	1.50
C	0.9	1.1
D	0.3	0.5
E	0.35	0.48
G	1.80	2.00
H	0.02	0.1
J	0.05	0.15
K	2.20	2.60

Package Outline Dimensions (Unit: mm)

SOT-23

