

Features

- Small mold type
- Low I_R
- High reliability


HF

Typical Applications

- Low power rectification


Mechanical Data

- Case: SOT-23 , SOT-323
- Molding compound, UL flammability classification rating 94V-0
- Terminals: Tin plated leads, solderable per MIL-STD-202, Method 208

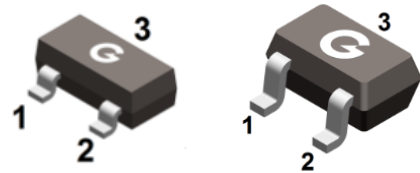

RB421D
SOT-23

RB451F
SOT-323



Ordering Information

Part Number	Package	Shipping	Marking Code
RB421D	SOT-23	3000 pcs / Tape & Reel	D3C
RB451F	SOT-323	3000 pcs / Tape & Reel	3C

Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	40	V
DC Reverse Voltage	V_R		
Average Rectified Forward Current	I_o	100	mA
Forward Current Surge Peak	I_{FSM}	1	A

Thermal Characteristics

Parameter	Symbol	RB421D	RB451F	Unit
Power Dissipation	P_D	350	250	mW
Typical Thermal Resistance per leg	$R_{\theta JA}^*$	286	400	$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	T_J	-40 to 125		$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-40 to +150		$^\circ\text{C}$




* Part mounted on FR-4 board with recommended pad layout

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage	$V_{(BR)R}$	$I_R = 100\mu\text{A}$	40	-	-	V
Forward Voltage	V_F^*	$I_F = 10\text{mA}$	-	-	0.34	V
		$I_F = 100\text{mA}$	-	-	0.55	
Reverse Current	I_R^{**}	$V_R = 10\text{V}$	-	-	30	μA
Capacitance Between Terminals	C_T	$V_R = 10\text{V}, f = 1\text{MHz}$	-	6	-	pF


*Pulse width $\leq 380\mu\text{s}$, Duty cycle $< 2\%$
**pulse test, $t_p \leq 5\text{ms}$

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

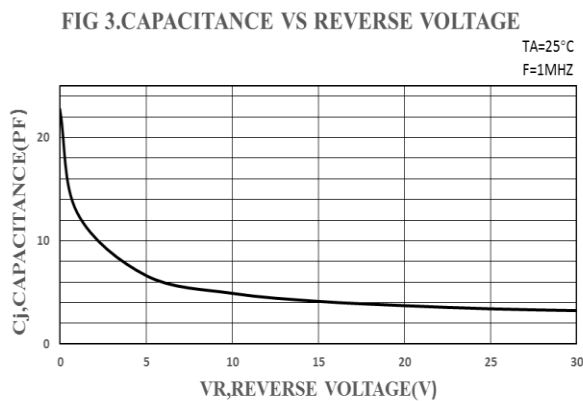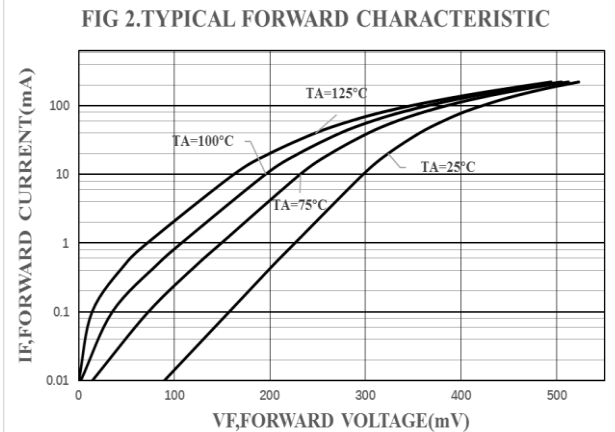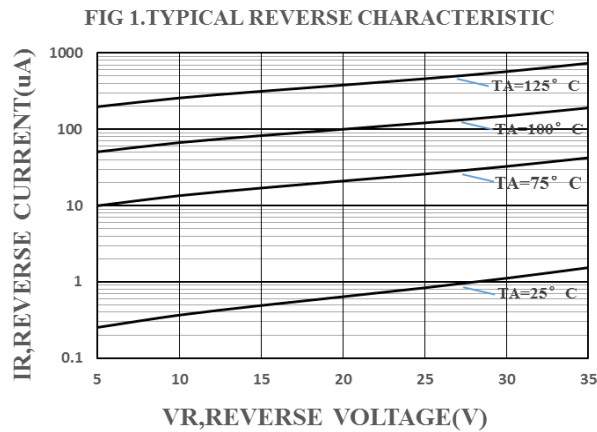


Package Outline Dimensions (unit: mm)

SOT-23

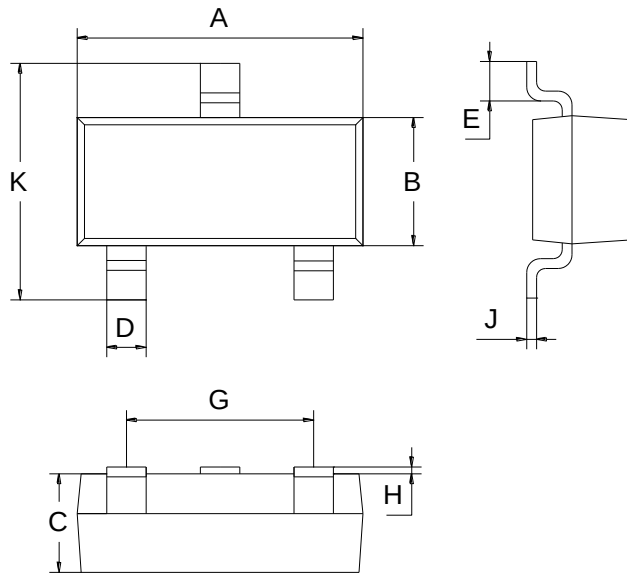

SOT-23		
Dim	Min	Max
A	2.70	3.10
B	1.10	1.50
C	0.90	1.10
D	0.30	0.50
E	0.35	0.48
G	1.80	2.00
H	0.02	0.10
J	0.05	0.15
K	2.20	2.60


SOT-323

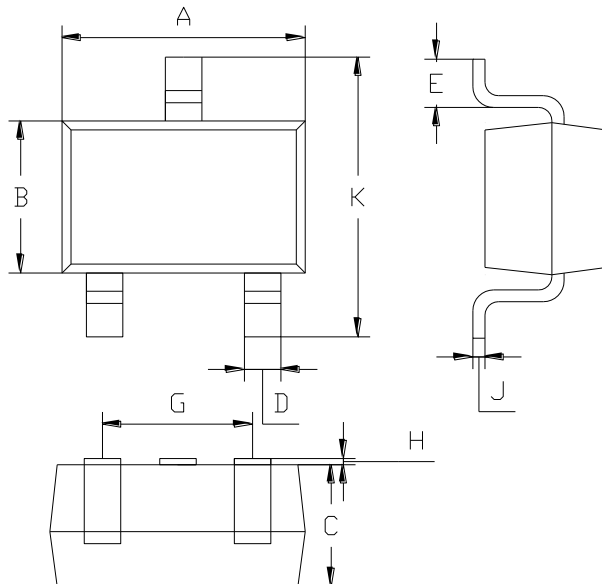


SOT-323		
Dim	Min	Max
A	2.00	2.20
B	1.15	1.35
C	0.90	1.10
D	0.15	0.35
E	0.25	0.40
G	1.20	1.40
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40

Mounting Pad Layout (unit: mm)

SOT-23

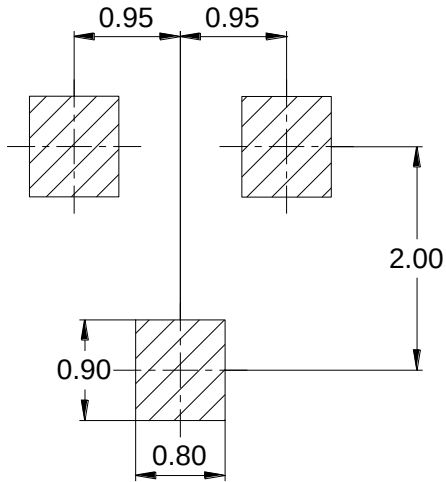

SOT-323

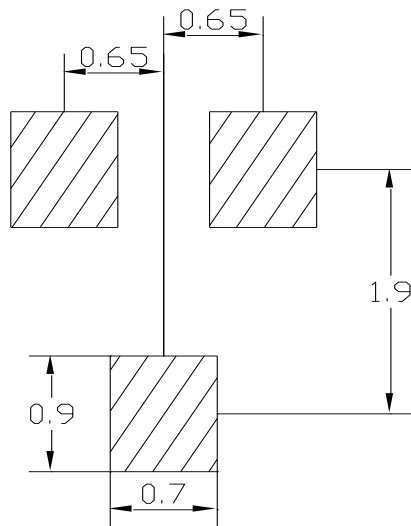

IMPORTANT NOTICE

Galaxy Microelectronics (GME) reserves the right to make changes without further notice to any product herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.