


Features

- High reliability
- Silicon epitaxial planar

HF

Mechanical Data

- Case: DFN0603-2L
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

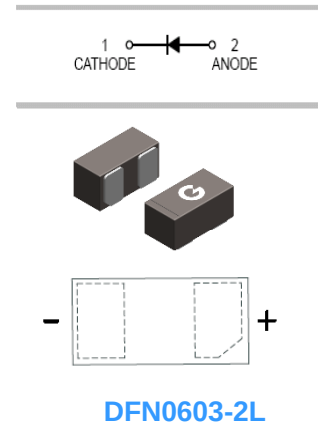

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
RB521LP3	DFN0603-2L	10000 pcs / Tape & Reel	C

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	V _{RRM}	30	V
Working Peak Reverse Voltage	V _{RWM}	30	V
DC Reverse Voltage	V _R	30	V
RMS Reverse Voltage	V _{RMS}	21	V
Maximum Average Forward Output Current	I _{F(AV)}	100	mA
Peak Forward Surge Current (8.3ms single half sine-wave)	I _{FSM}	0.5	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P _D	180	mW
Thermal Resistance Junction-to-Air *1	R _{θJA}	360	°C/W
Thermal Resistance Junction-to-Case *1	R _{θJC}	200	°C/W
Thermal Resistance Junction-to-Lead *1	R _{θJL}	350	°C/W
Operating Junction Temperature	T _J	-55 ~ +150	°C
Storage Temperature Range	T _{STG}	-55 ~ +150	°C

Note 1: The data tested by surface mounted on a minimum recommended FR-4 board

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage	$V_{(BR)}$	$I_R = 100\mu\text{A}$	30	-	-	V
Forward Voltage	V_F	$I_F = 1\text{mA}$	-	-	0.35	V
		$I_F = 10\text{mA}$	-	-	0.46	V
Maximum Peak Reverse Current	I_R	$V_R = 10\text{V}$	-	-	5	μA
		$V_R = 30\text{V}$	-	-	10	μA

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

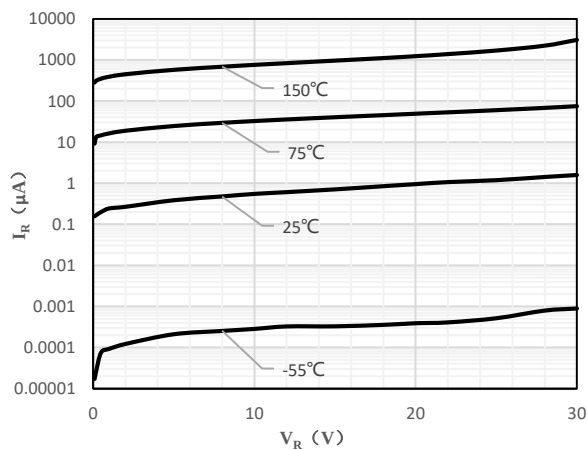


Fig 1 Typical Reverse Characteristic

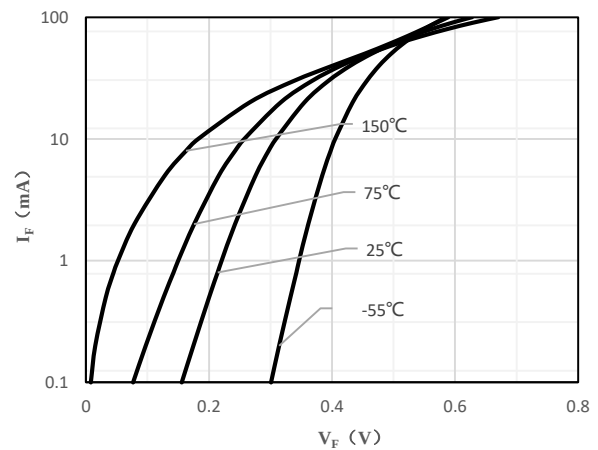


Fig 2 Typical Forward Characteristic

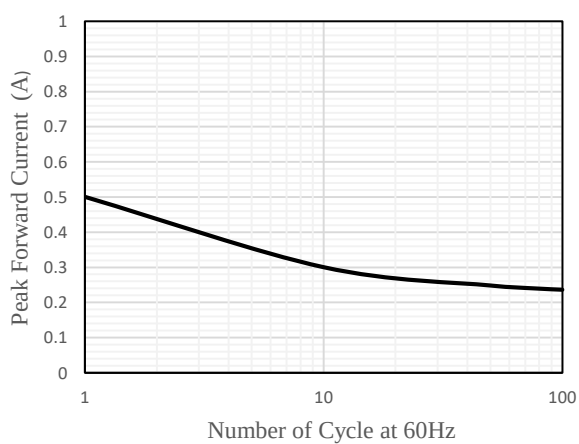


Fig 3 Surge Current Derating Curve


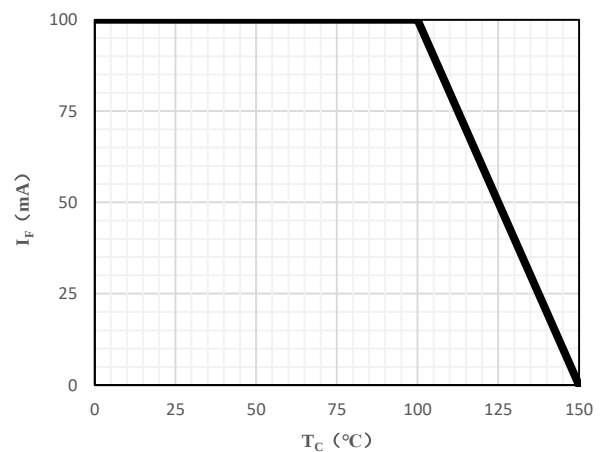


Fig 4 Current Derating


Package Outline Dimensions (Unit: mm)

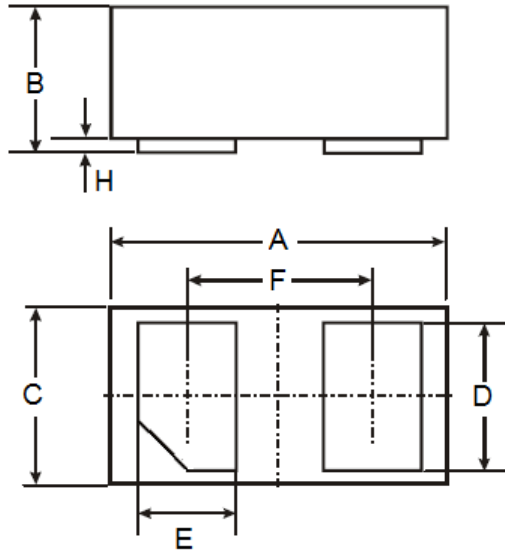

DFN0603-2L			
Dimension	Min.	Typ.	Max.
A	0.595	0.620	0.645
B	0.270	0.300	0.350
C	0.295	0.320	0.345
D	0.190	0.240	0.290
E	0.140	0.190	0.240
F	-	0.355	-
H	0	0.020	0.030

Mounting Pad Layout (Unit: mm)

DFN0603-2L

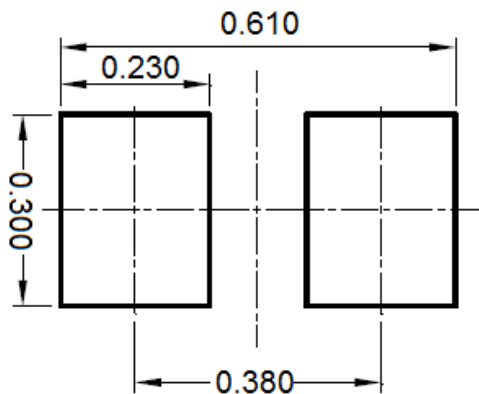

Important Notice

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.