


Surface Mount Rectifiers

TS3DBF - TS3MBF

Features

- For surface mounted applications
- Ideal for automated placement
- Low forward voltage drop
- High forward surge current capability
- RoHS compliant with Halogen-free
- Qualified to AEC-Q101 Standards



Mechanical Data

- Case: SMBF molded plastic
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Solder plated, solderable per MIL- STD-202, Method 208
- Polarity: Color band denotes cathode end

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	TS3D BF	TS3G BF	TS3J BF	TS3K BF	TS3M BF	Unit
Peak Repetitive Reverse Voltage	V _{RRM}	200	400	600	800	1000	V
RMS Reverse Voltage	V _{RMS}	140	280	420	560	700	V
DC Blocking Voltage	V _{DC}	200	400	600	800	1000	V
Average Forward Output Current	I _{F_AV}	3.0					A
Peak Forward Surge Current, 8.3ms Single Half Sine wave	I _{FSM}	100					A

Thermal Characteristics

Parameter	Symbol	TS3D BF	TS3G BF	TS3J BF	TS3K BF	TS3M BF	Unit
Typical Thermal Resistance *1	R _{θJA}	65					°C/W
	R _{θJC}	16					
	R _{θJL}	15					
Operating Junction Temperature Range	T _J	-55 ~ +150					°C
Storage Temperature Range	T _{STG}	-55 ~ +150					°C

Note *1: Device mounted on p.c.b. with 10 mm x 20 mm x 0.1mm copper pad area

Surface Mount Rectifiers

TS3DBF - TS3MBF

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions		Typ.	Max.	Unit
Instantaneous Forward Voltage	V_F	$I_F = 3.0\text{A}$		-	1.15	V
Reverse Current	I_R	Rated V_R	@ $T_A = 25^\circ\text{C}$	-	5.0	μA
			@ $T_A = 125^\circ\text{C}$	-	125	

Surface Mount Rectifiers

TS3DBF - TS3MBF

Ratings and Characteristic Curves (@ $T_A=25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

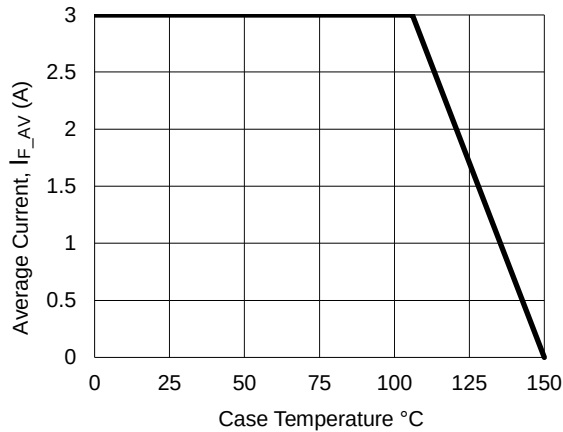


Fig.2 Surge Current Derating Curve

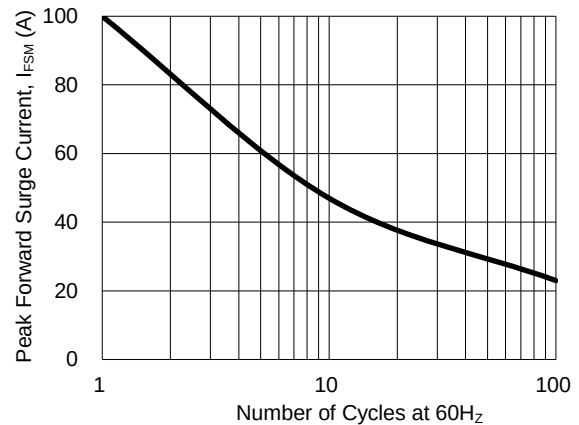


Fig.3 Typical Forward Voltage Characteristics


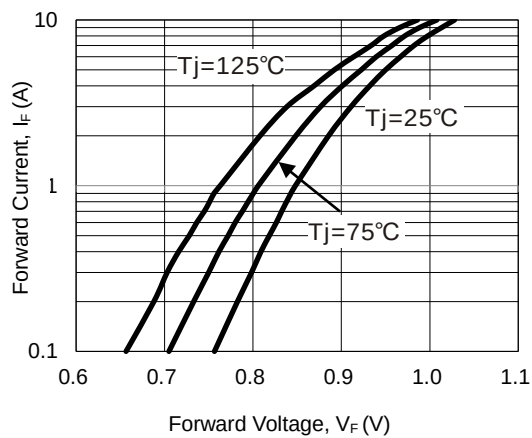



Fig.4 Typical Reverse Characteristics

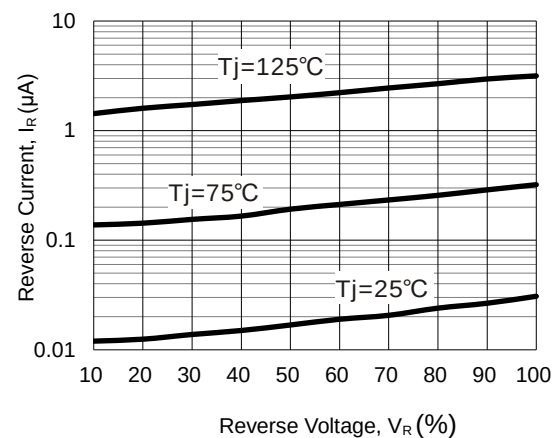


Surface Mount Rectifiers

TS3DBF - TS3MBF

Package Outline Dimensions (Unit: mm)

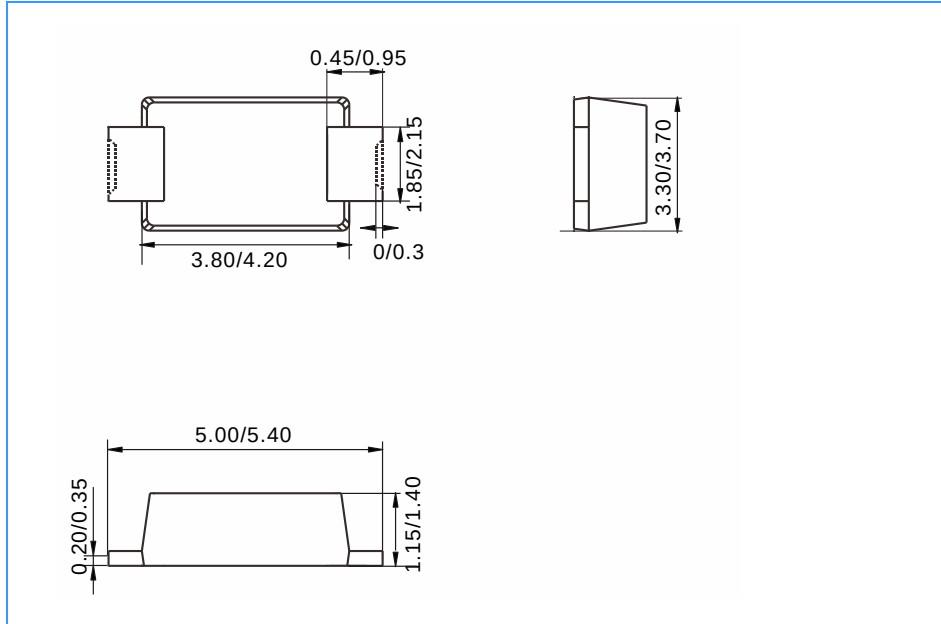

Mounting Pad Layout (Unit: mm)

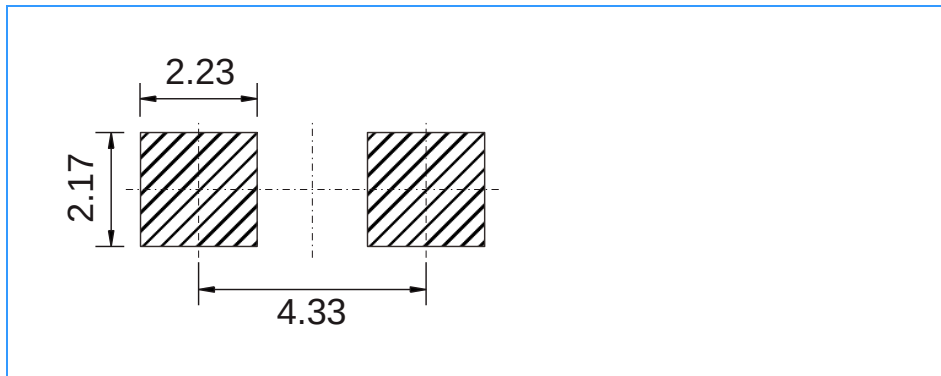

Ordering Information

Part Number	Marking	Package	Shipping Quantity
TS3DBF	S3DBF	SMBF	4000 / Tape & Reel
TS3GBF	S3GBF	SMBF	4000 / Tape & Reel
TS3JBF	S3JBF	SMBF	4000 / Tape & Reel
TS3KBF	S3KBF	SMBF	4000 / Tape & Reel
TS3MBF	S3MBF	SMBF	4000 / Tape & Reel