



Features

- High DC current gain
- Complimentary to S8550W
- Excellent H_{FE} Linearity
- RoHS compliant with Halogen-free

HF



SOT-323

Mechanical Data

- Case: SOT-323
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Tin-plated; solderability per MIL-STD-202, Method 208

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
S8050W-L	SOT-323	3000 pcs / Tape & Reel	J3Y
S8050W-H	SOT-323	3000 pcs / Tape & Reel	J3Y

Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Collector-Base Breakdown Voltage	V_{CBO}	40	V
Collector-Emitter Breakdown Voltage	V_{CEO}	25	V
Emitter-Base Breakdown Voltage	V_{EBO}	5	V
Continuous Collector Current	I_C	0.5	A
Peak Collector Current ($t_p \leq 1\text{ms}$)	I_{CM}	1	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation ($T_A = 25^\circ\text{C}$)	P_D	0.3	W
Junction Temperature Range	T_J	$-55 \sim +150$	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	$-55 \sim +150$	$^\circ\text{C}$

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 100\mu\text{A}, I_E = 0$	40	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 1\text{mA}, I_B = 0$	25	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 100\mu\text{A}, I_C = 0$	5	-	-	V
Collector Cut-off Current	I_{CBO}	$V_{CB} = 40\text{V}, I_E = 0$	-	-	0.1	μA
Collector Cut-off Current	I_{CEO}	$V_{CE} = 20\text{V}, I_B = 0$	-	-	0.1	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB} = 3\text{V}, I_C = 0$	-	-	0.1	μA
DC Current Gain	h_{FE}	$V_{CE} = 1\text{V}, I_C = 50\text{mA}$	120	-	350	-
		$V_{CE} = 1\text{V}, I_C = 500\text{mA}$	50	-	-	-
Collector-emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 500\text{mA}, I_B = 50\text{mA}$	-	-	0.6	V
Base-emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 500\text{mA}, I_B = 50\text{mA}$	-	-	1.2	V
Transition Frequency	f_T	$I_C = 20\text{mA}, V_{CE} = 6\text{V}$ $f = 30\text{MHz}$	150	-	-	MHz

Classification of h_{FE}

Rank	L	H
Range	120-200	200-350

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

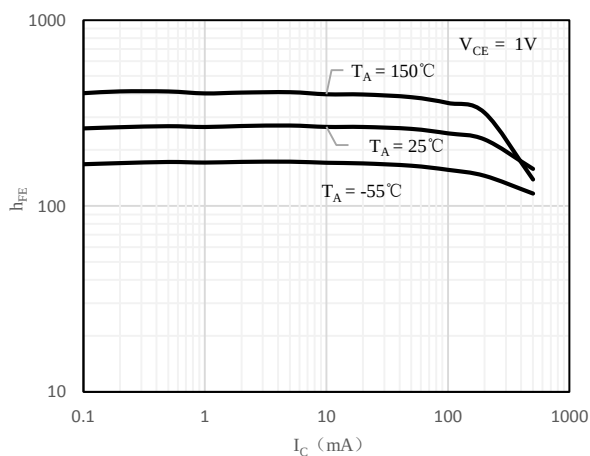


Fig 1 h_{FE} vs. I_C

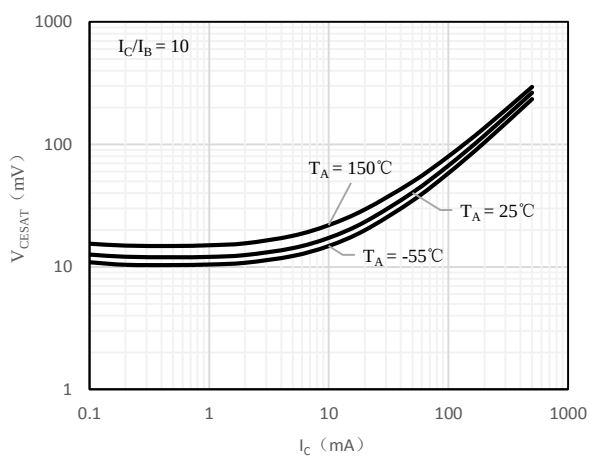


Fig 2 $V_{CE(sat)}$ vs. I_C

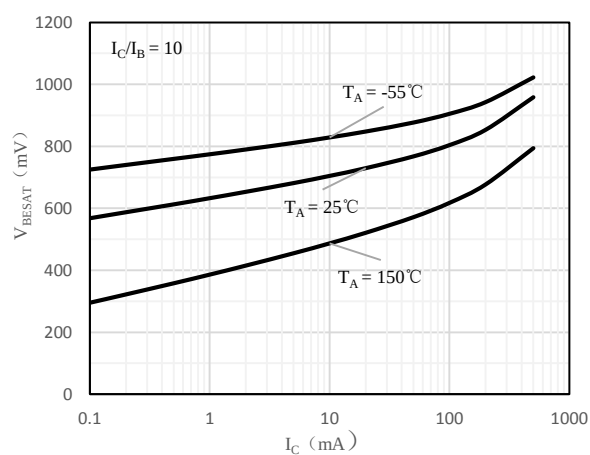


Fig 3 $V_{BE(sat)}$ vs. I_C


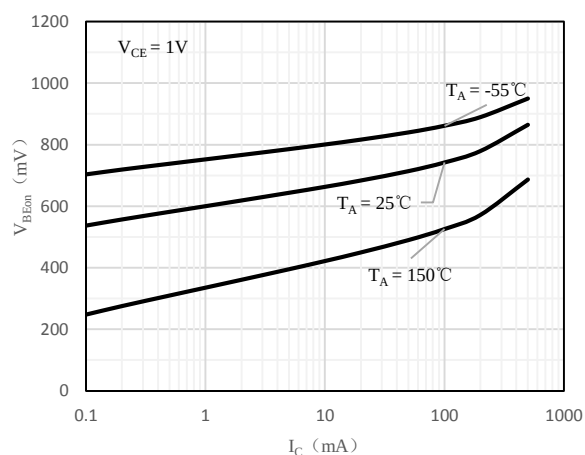


Fig 4 $V_{BE(on)}$ vs. I_C

Package Outline Dimensions (Unit: mm)



Mounting Pad Layout (Unit: mm)

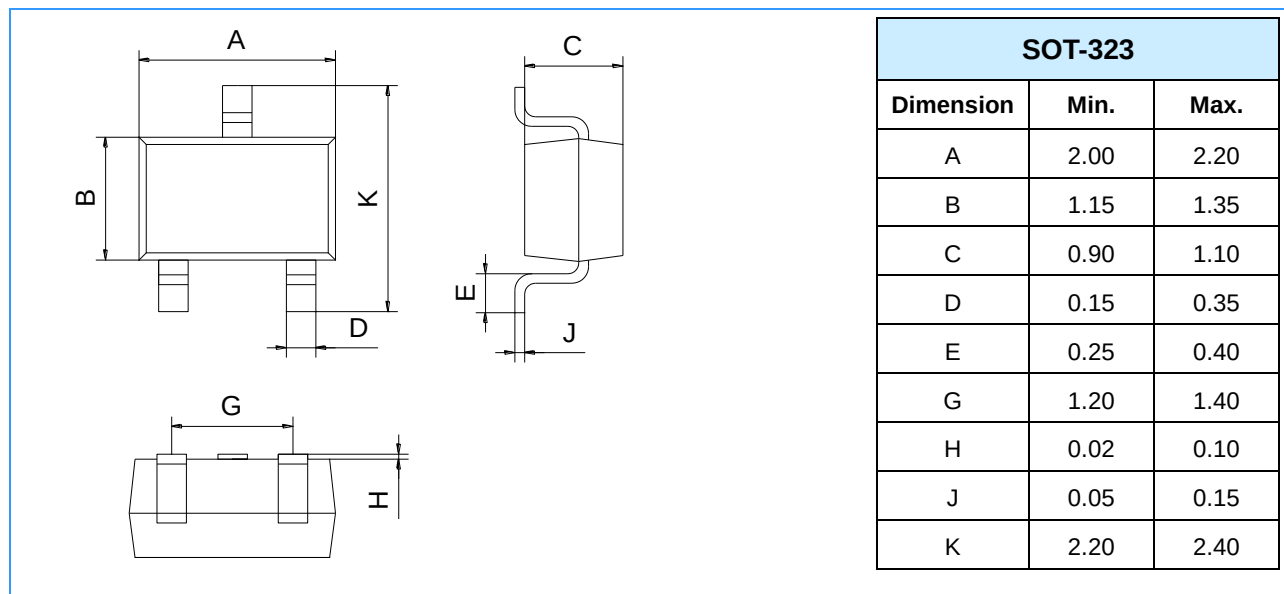