

Features

- Low reverse current and low forward voltage
- High reliability
- Small surface mounting type

HF


1 2
CATHODE ANODE

Typical Applications

- For general purpose applications

Mechanical Data

- Case: SOD-523
- Molding compound, UL flammability classification rating 94V-0
- Terminals: Tin plated leads, solderable per MIL-STD-202, Method 208



SOD-523

Ordering Information

Part Number	Package	Shipping	Marking Code
SD103AX	SOD-523	3000 pcs / Tape * Reel	S4
SD103BX	SOD-523	3000 pcs / Tape * Reel	S5
SD103CX	SOD-523	3000 pcs / Tape * Reel	S6

Maximum Ratings (@T_A=25°C unless otherwise specified)

Characteristic	Symbol	SD103AX	SD103BX	SD103CX	Units
Peak repetitive reverse voltage	V _{RRM}	40	30	20	V
RMS Reverse voltage	V _{RMS}	28	21	14	V
Maximum average forward output current	I _{F(AV)}	350			mA
Peak forward surge current, 8.3ms single half-sine-wave	I _{FSM}	1.5			A

Thermal Characteristics





Characteristic	Symbol	Value	Units
Power dissipation	P _D	150	mW
Typical thermal resistance to Air	R _{θJA} *	295	°C/W
Typical thermal resistance to Case	R _{θJC} *	200	°C/W
Typical thermal resistance to Lead	R _{θJL} *	205	°C/W
Operating junction temperature range	T _J	-55 to +125	°C
Storage temperature range	T _{STG}	-55 to +150	°C

* Part mounted on FR-4 board with recommended pad layout

Electrical Characteristics (@T_A=25°C unless otherwise specified)


Characteristic	Symbol	Test conditions	Min.	Typ.	Max.	Units
Reverse Breakdown Voltage	V _{(BR)R}	I _R = 10μA SD103AX SD103BX SD103CX	40 30 20	-	-	V
Forward Voltage	V _F *	I _F =20mA	-	-	0.37	V
		I _F =200mA	-	-	0.60	
Maximum Peak Reverse Current	I _R **	V _R = 30V (SD103AX) V _R = 20V (SD103BX) V _R = 10V (SD103CX)	-	-	5	uA
Capacitance between terminals	C _T	V _R =0V,f=1MHz	-	22	50	pF
*Pulse width ≤380 uS, Duty cycle < 2%						
**pulse test , tp≤5ms						

Ratings and Characteristic Curves ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

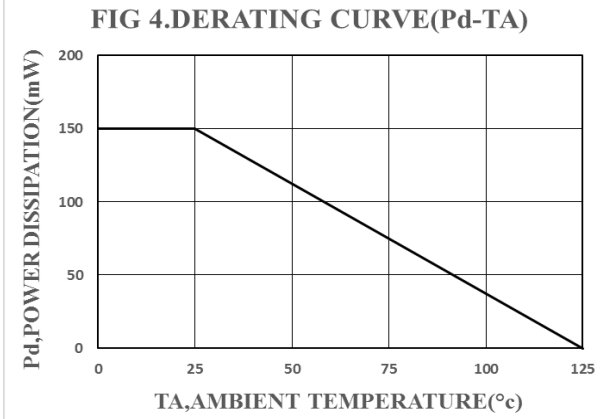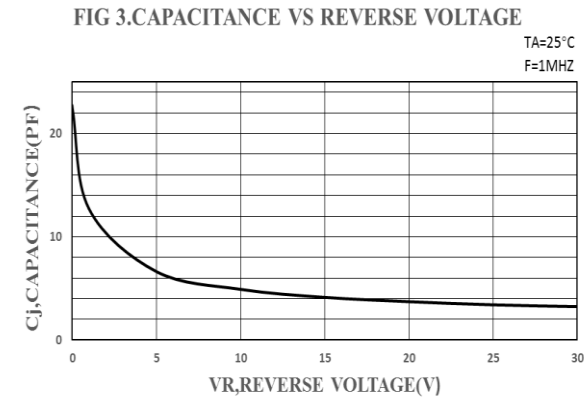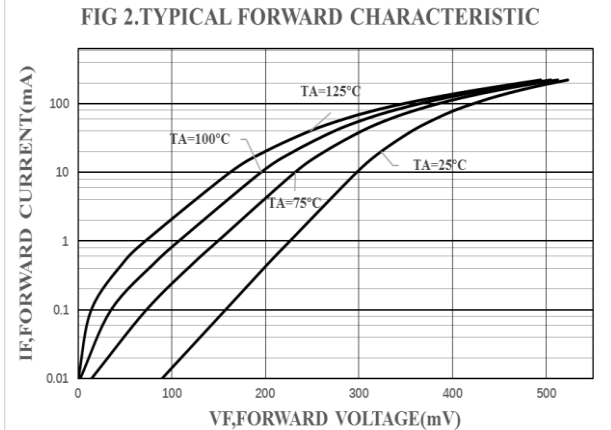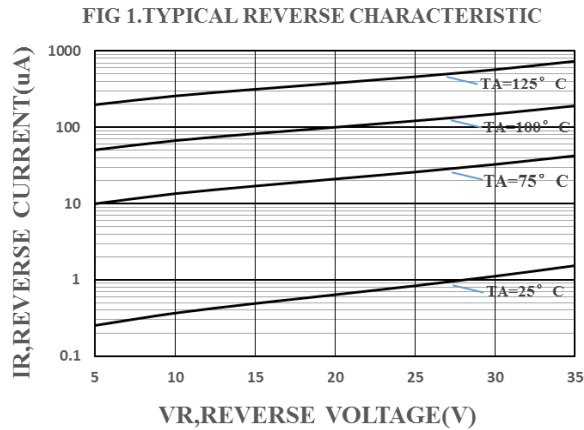

Package Outline Dimensions (unit: mm)


SOD-523

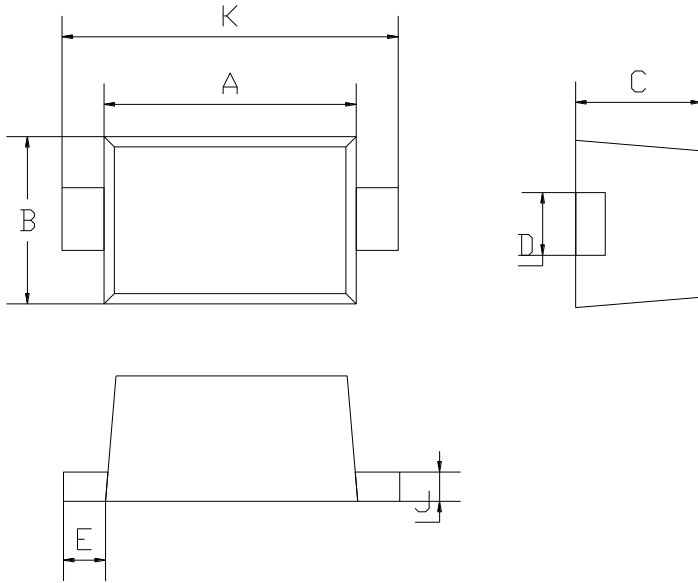

SOD-523		
Dim	Min	Max
A	1.10	1.30
B	0.70	0.90
C	0.50	0.70
D	0.25	0.35
E	0.15	0.25
J	0.05	0.15
K	1.50	1.70

Mounting Pad Layout (unit: mm)

SOD-523

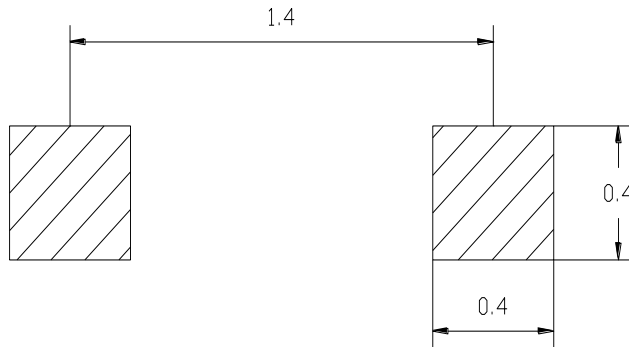

IMPORTANT NOTICE

Galaxy Microelectronics (GME) reserves the right to make changes without further notice to any product herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.