



Features

- ESD / transient protection of high speed data lines
 - IEC 61000-4-2 (ESD): ± 30 kV (air), ± 30 kV (contact)
- Working voltage: $V_{RWM} = 6.2V$
- Low clamping voltage

HF



SOD-323

Mechanical Data

- Case: SOD-323
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
SD6V2C	SOD-323	3000 pcs / Tape & Reel	6.2C

Maximum Ratings (@ $T_A = 25^\circ C$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power ($t_p = 8 / 20\mu s$)	P_{PP}	350	W
Reverse Working Voltage	V_{RWM}	6.2	V
ESD According to IEC61000-4-2 Air	V_{ESD}	± 30	kV
ESD According to IEC61000-4-2 Contact Discharge	V_{ESD}	± 30	kV

Thermal Characteristics

Parameter	Symbol	Value	Unit
Operating Junction Temperature Range	T_J	$-55 \sim +125$	$^\circ C$
Storage Temperature Range	T_{STG}	$-55 \sim +150$	$^\circ C$

Electrical Characteristics (@ $T_A = 25^\circ C$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage	V_{BR}	$I_T = 1mA$	6.3	-	-	V
Reverse Leakage Current	I_R	$V_{RWM} = 6.2V$	-	-	1	μA
Clamping Voltage	V_C	$I_{PP} = 1A, t_p = 8/20\mu s$	-	7.5	10	V
		$I_{PP} = 10A, t_p = 8/20\mu s$	-	8.7	11	V
		$I_{PP} = 24A, t_p = 8/20\mu s$	-	12	13	V
Junction Capacitance	C_J	$V_R = 0V, f = 1.0MHz$	-	40	60	pF

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

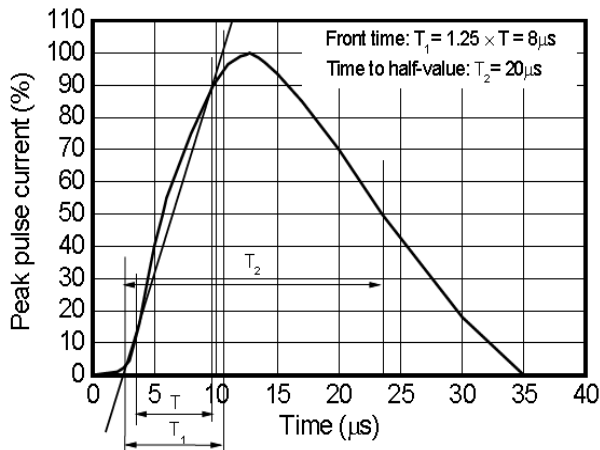


Fig 1 8/20 μs waveform per IEC61000-4-5

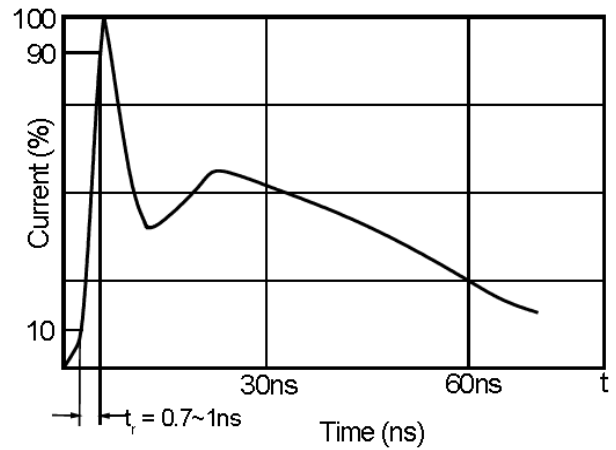


Fig 2 ESD pulse waveform according to IEC61000-4-2

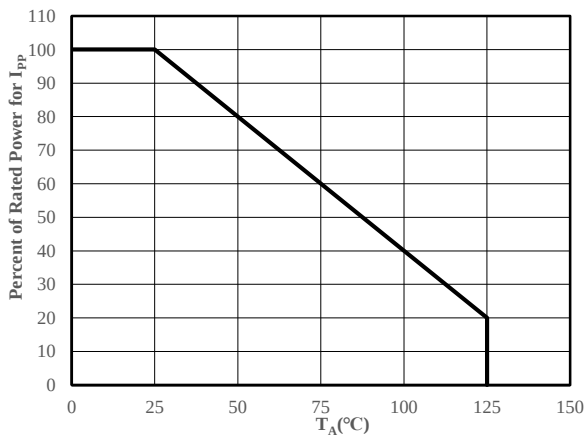


Fig 3 Power Derating Curve

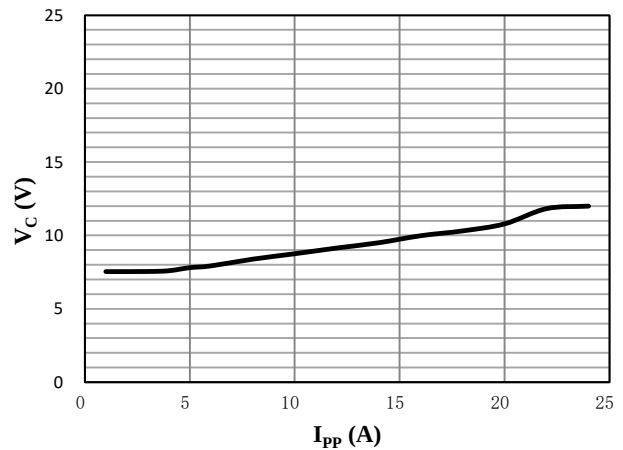


Fig 4 Clamping Voltage vs. Peak Pulse Current


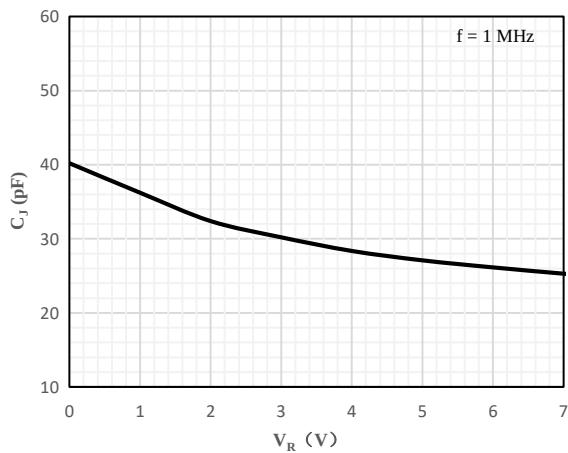


Fig 5 Junction Capacitance vs. Breakdown Voltage


Package Outline Dimensions (Unit: mm)

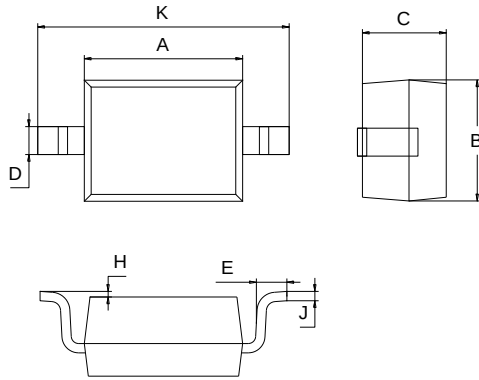

SOD-323		
Dimension	Min.	Max.
A	1.60	1.80
B	1.20	1.40
C	0.80	0.90
D	0.25	0.35
E	0.22	0.42
H	0.02	0.10
J	0.05	0.15
K	2.55	2.75

Mounting Pad Layout (Unit: mm)

SOD-323

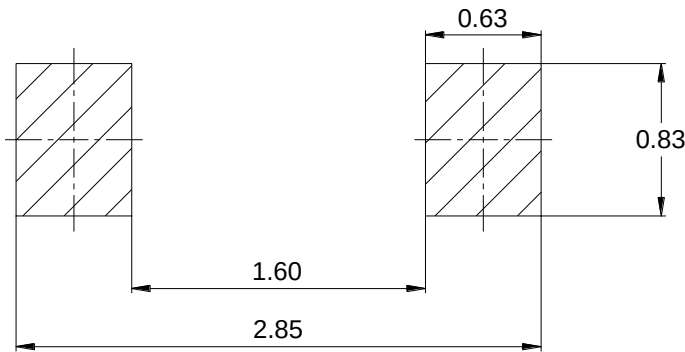

IMPORTANT NOTICE

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.