


Features

- Low power loss by high speed switching and low on-resistance
- Excellent thermal behavior
- HBM: JESD22-A114-B: 1C
- Product validation acc. JEDEC Standard
- RoHS compliant with Halogen-free

HF




Applications

- PFC power supply stages
- Solar inverter
- Telecom
- Server
- UPS

Mechanical Data

- Case: TO-247
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208



TO-247

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
SJM60R180U	TO-247	30 pcs / Tube	SJM60R180U

Maximum Ratings (@ $T_C = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Drain-to-Source Voltage	V_{DS}	600	V
Gate-to-Source Voltage	V_{GS}	± 30	V
Continuous Drain Current ($T_C = 25^\circ\text{C}$)	I_D	21	A
Continuous Drain Current ($T_C = 100^\circ\text{C}$)		13	A
Pulsed Drain Current ($t_p = 10\mu\text{s}$, $T_C = 25^\circ\text{C}$)	I_{DM}	84	A
Single Pulse Avalanche Energy ^{*2}	E_{AS}	400	mJ
Power Dissipation ($T_C = 25^\circ\text{C}$)	P_D	208	W
Operating Junction Temperature Range	T_J	$-55 \sim +150$	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	$-55 \sim +150$	$^\circ\text{C}$

Thermal Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit
Thermal Resistance Junction-to-Case	$R_{\theta JC}$	-	0.5	0.6	$^\circ\text{C/W}$
Thermal Resistance Junction-to-Air	$R_{\theta JA}$	-	-	40	$^\circ\text{C/W}$

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
V _{DS}	Drain-Source Breakdown Voltage	V _{GS} = 0V, I _D = 250μA	600	-	-	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} = 600V, V _{GS} = 0V	-	-	1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} = ±30V, V _{DS} = 0V	-	-	±100	nA
On Characteristics						
R _{DS(ON)}	Drain-Source On-resistance *1	V _{GS} = 10V, I _D = 10A	-	0.16	0.18	Ω
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} , I _D = 250μA	2.5	3.0	4.5	V
R _G	Gate Resistance	V _{GS} = 0V, f = 1MHz	-	8.1	-	Ω
Dynamic Characteristics						
C _{ISS}	Input Capacitance	V _{GS} = 0V	-	1292	-	pF
C _{OSS}	Output Capacitance	V _{DS} = 40V	-	107	-	
C _{RSS}	Reverse Transfer Capacitance	f = 250kHz	-	0.7	-	
Switching Characteristics						
t _{d(ON)}	Turn-on Delay Time *3	V _{DD} = 400V	-	15	-	ns
t _r	Turn-on Rise Time *3	V _{GS} = 10V	-	11	-	
t _{d(OFF)}	Turn-Off Delay Time *3	I _D = 8.5A	-	71	-	
t _f	Turn-Off Fall Time *3	R _G = 10Ω	-	11	-	
Q _G	Total Gate-Charge	V _{DD} = 520V	-	35	-	nC
Q _{GS}	Gate to Source Charge	V _{GS} = 10V	-	7.5	-	
Q _{GD}	Gate to Drain (Miller) Charge	I _D = 11A	-	18	-	
Source-Drain Diode Characteristics						
V _{SD}	Diode Forward Voltage *1	I _{SD} = 10A, V _{GS} = 0V	-	0.84	1.2	V
t _{rr}	Reverse Recovery Time	I _F = 10A, V _R = 400V	-	310	-	ns
Q _{rr}	Reverse Recovery Charge	di/dt = 100A/μs	-	3.8	-	μC

Notes:

- The data tested by pulsed, pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$
- The E_{AS} data shows Max. rating. The test condition is $V_{DD} = 100V, V_{GS} = 15V, L = 50mH$
- Guaranteed by design, not subject to production

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

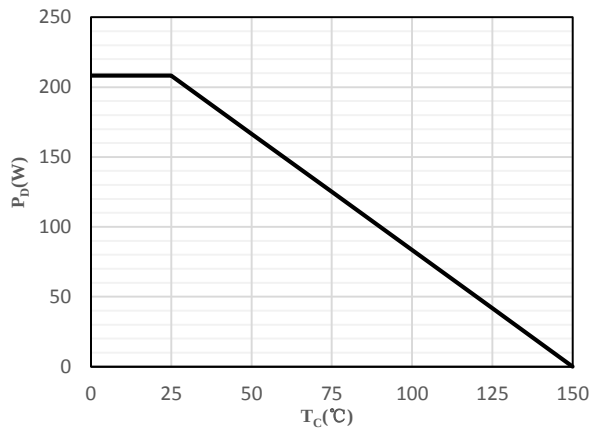


Fig 1 Power Dissipation

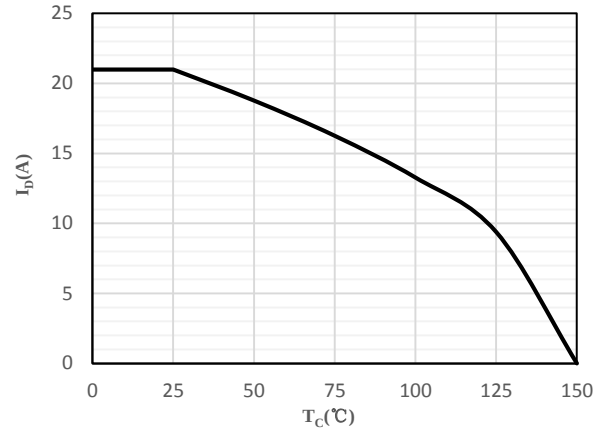


Fig 2 Drain Current

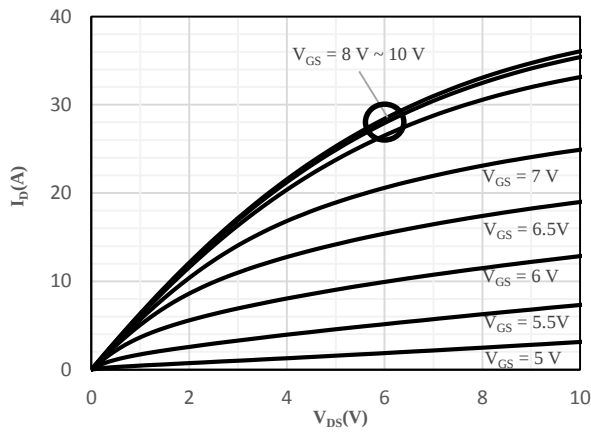


Fig 3 Typical Output Characteristics

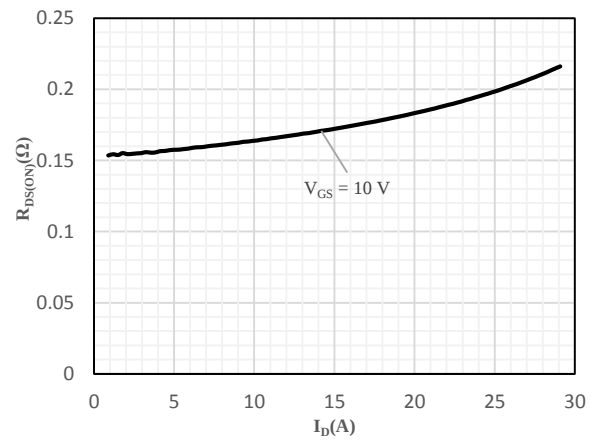


Fig 4 On-Resistance vs. Drain Current
and Gate Voltage

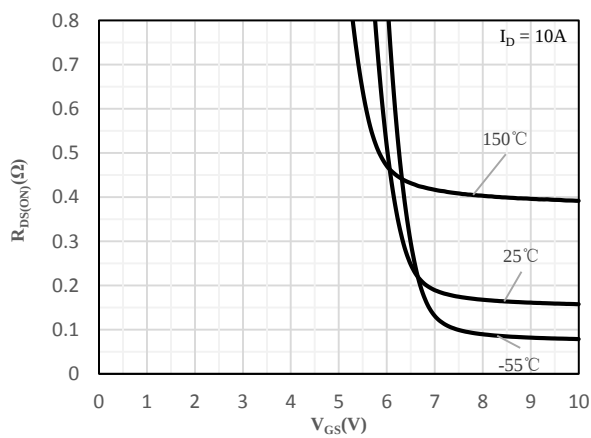


Fig 5 On-Resistance vs. Gate-Source Voltage

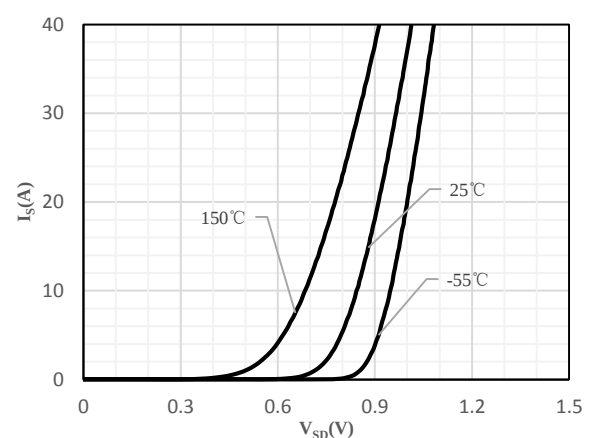


Fig 6 Body-Diode Characteristics

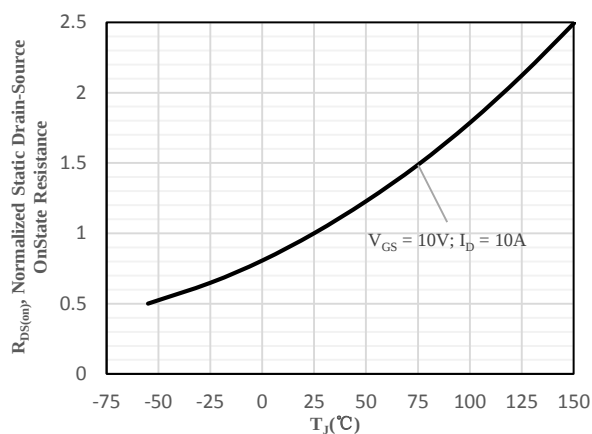


Fig 7 Normalized On-Resistance vs. Junction Temperature

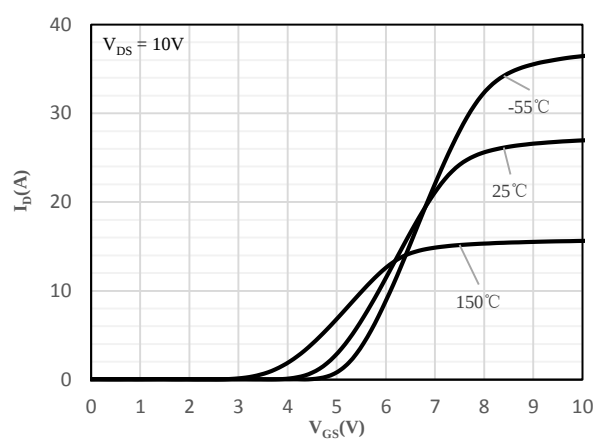


Fig 8 Transfer Characteristics

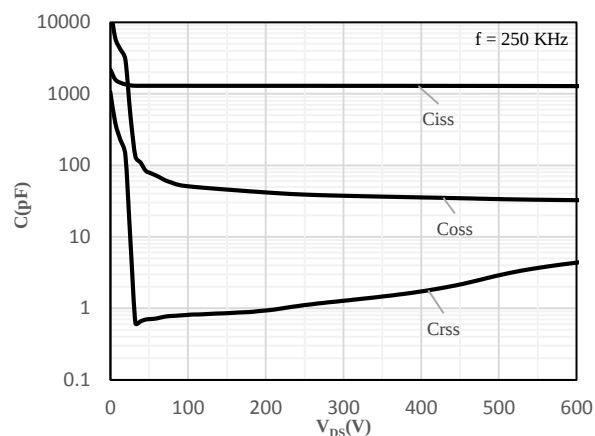


Fig 9 Capacitance Characteristics

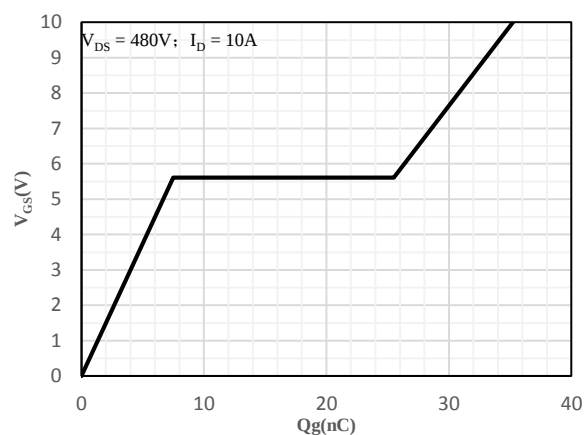


Fig 10 Gate-Charge Characteristics

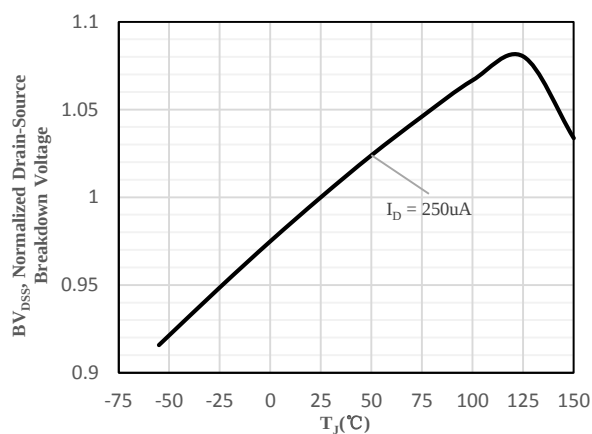


Fig 11 Normalized Breakdown Voltage vs. Junction Temperature




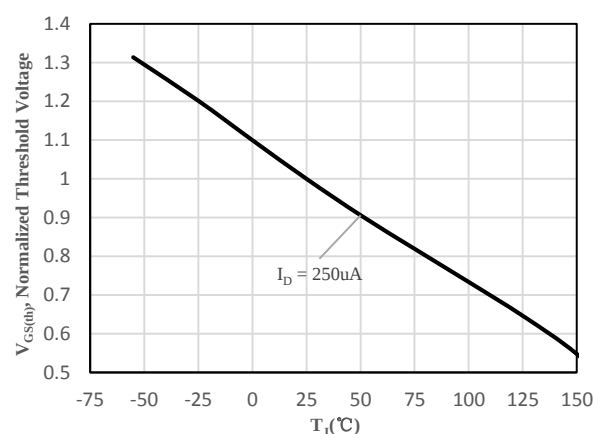


Fig 12 Normalized $V_{GS(th)}$ vs. Junction Temperature

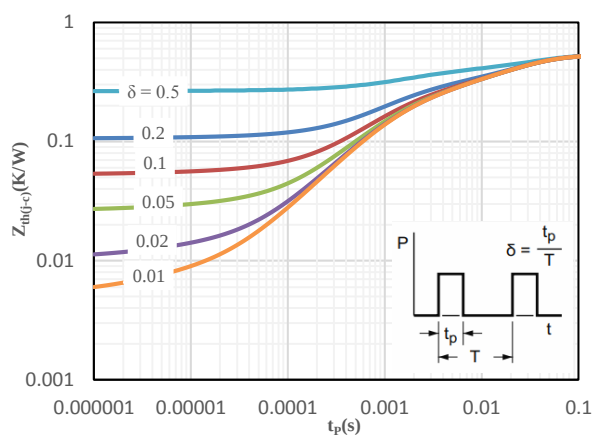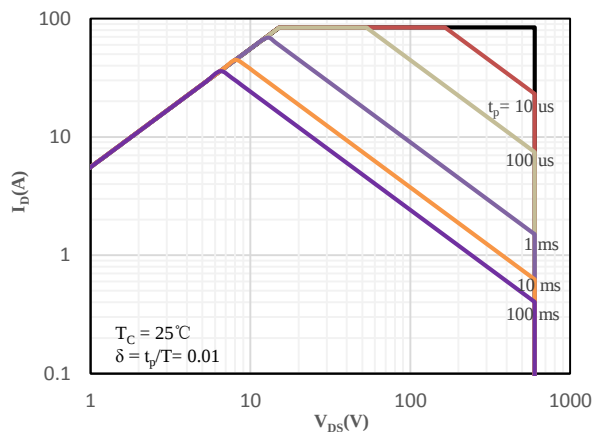

Package Outline Dimensions (Unit: mm)

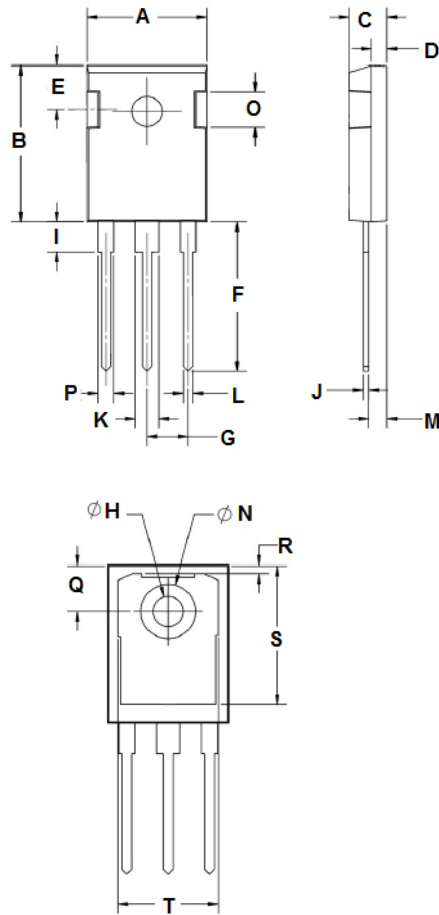

TO-247		
Dimension	Min.	Max.
A	15.50	16.10
B	20.70	21.30
C	4.70	5.30
D	1.80	2.20
E	5.20	5.80
F	19.70	20.30
G	5.20	5.60
H	3.30	3.70
I	3.90	4.30
J	0.50	0.70
K	2.80	3.20
L	1.00	1.40
M	2.20	2.60
N	7.00	7.20
O	4.90	5.30
P	1.80	2.20
Q	5.70	5.90
R	0.80	1.20
S	17.00	17.80
T	13.60	14.20