


Zener Diode

STZ6.2N

FEATURES

- Small surface mounting type.
- Noise suppression on signal line.
- Multiple diodes with common anode configuration.
- High Reliability.

HF

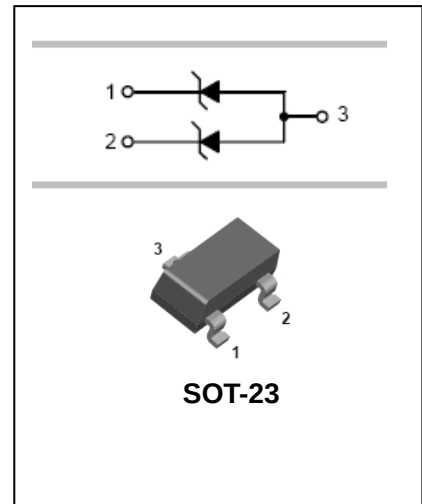

APPLICATIONS

- Voltage regulation(anode common twin type)

ORDERING INFORMATION

Type No.	Marking	Package Code
STZ6.2N	6B	SOT-23

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Parameter	symbol	limits	unit
Power dissipation	P_D	200	mW
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-55 to +150	°C

*total of tow elements


ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	symbol	Min.	Typ.	Max.	unit	conditions
Zener voltage	V_Z	5.81		6.4	V	$I_Z=5mA$
Reverse current	I_R			1.0	μA	$V_R=3.0V$
Operating resistance	Z_Z			60	Ω	$I_Z=5mA$
Rising Operating resistance	Z_{ZK}			100	Ω	$I_Z=0.5mA$

Zener Diode

STZ6.2N

TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

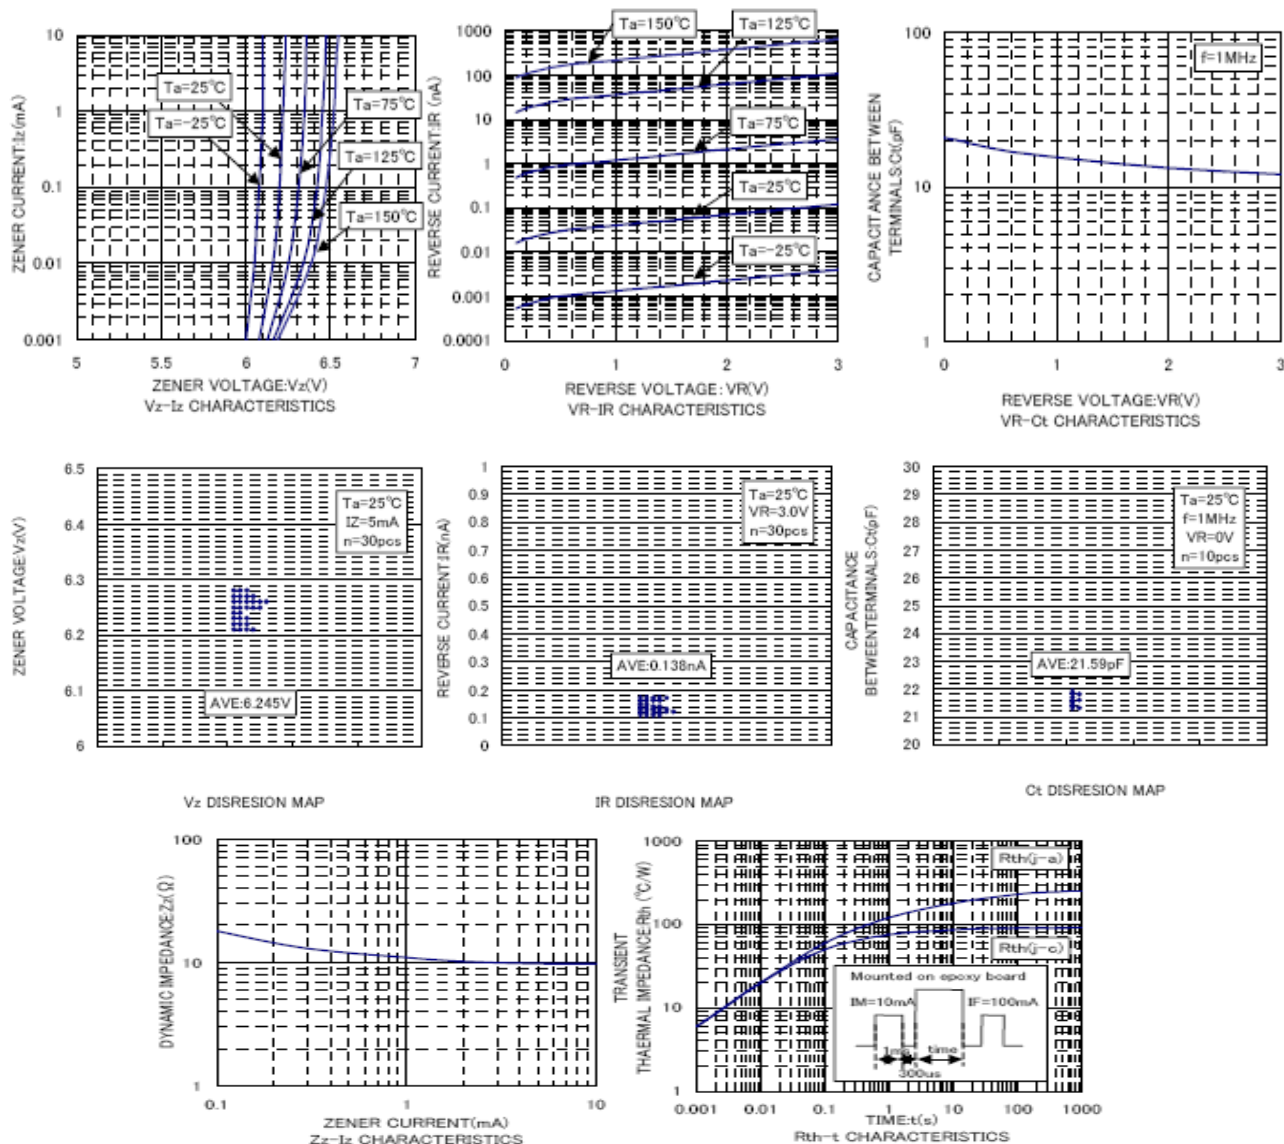


Zener Diode

STZ6.2N


PACKAGE OUTLINE

Plastic surface mounted package

SOT-23

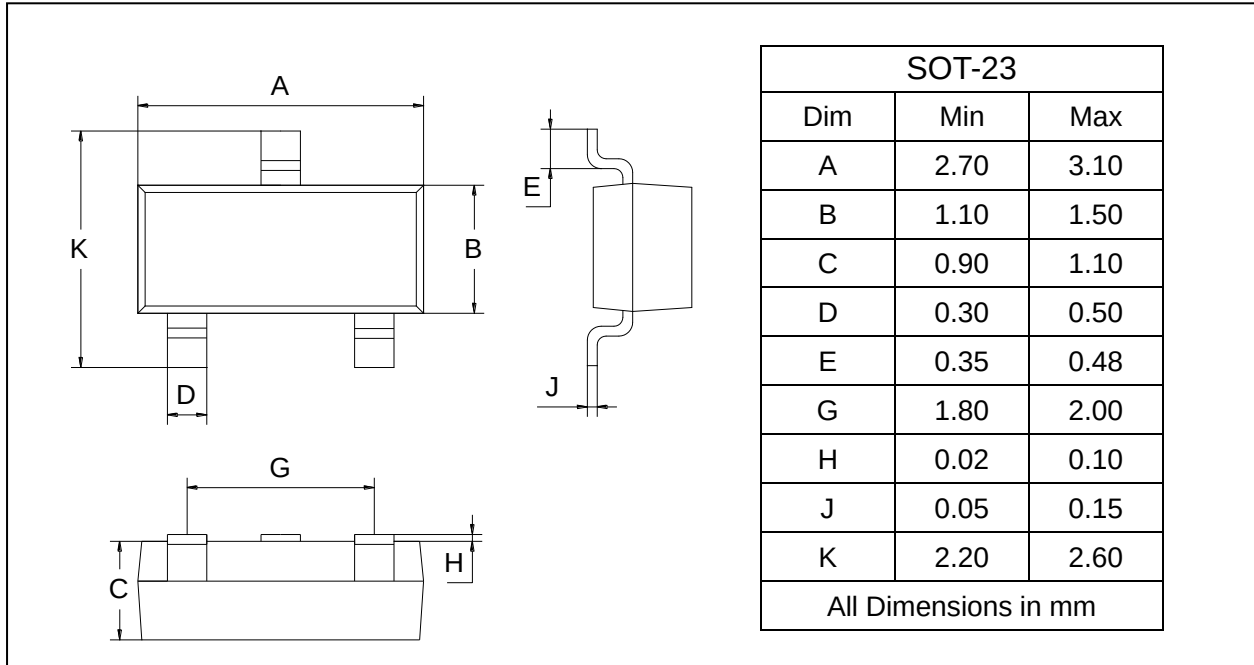

SOLDERING FOOTPRINT

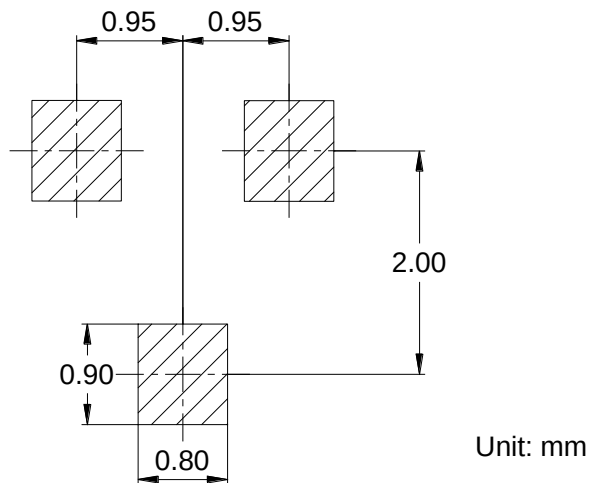

PACKAGE INFORMATION

Device	Package	Shipping
STZ6.2N	SOT-23	3000 pcs / Tape & Reel