

Switching Diode
T1SS355

Features

- Small surface mounting type
- High speed switching
- High reliability
- Halogen free
- Qualified to AEC-Q101 standards for high reliability

HF





SOD-323

Mechanical Data

- Case: SOD-323
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
T1SS355	SOD-323	3000 pcs / Tape & Reel	A

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Non-Repetitive Peak Reverse Voltage	V_{RM}	90	V
DC Blocking Voltage	V_R	80	V
Average Rectified Output Current	I_o	100	mA
Non-repetitive Peak Forward Surge Current, t = 1s	I_{FSM}	0.5	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P_D	200	mW
Thermal Resistance Junction-to-Air *1	$R_{\theta JA}$	315	°C/W
Thermal Resistance Junction-to-Lead *1	$R_{\theta JL}$	260	°C/W
Thermal Resistance Junction-to-Case *1	$R_{\theta JC}$	230	°C/W
Operating Junction Temperature Range	T_J	-55 ~ +150	°C
Storage Temperature Range	T_{STG}	-55 ~ +150	°C

Note 1: The data tested by surface mounted on a 1 inch^2 FR-4 board with 2OZ copper

Electrical Characteristics (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage	$V_{(BR)R}$	I_R = 100μA	80	-	-	V
Forward Voltage	V_F	I_F = 100mA	-	-	1.2	V
Maximum Peak Reverse Current	I_R	V_R = 80V	-	-	0.1	μA
Total Capacitance	C_J	V_R = 0.5V, f = 1.0MHz	-	-	3	pF
Reverse Recovery Time	t_{rr}	I_F = I_R = 10mA I_{rr} = 0.1×I_R, R_L = 100Ω	-	-	4	ns

Ratings and Characteristics Curves (@ T_A = 25°C unless otherwise specified)

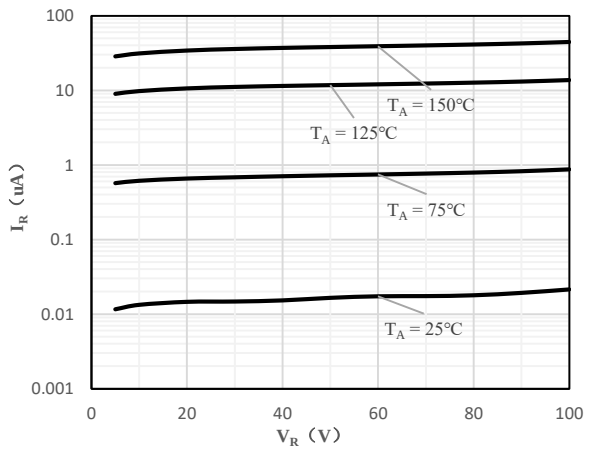


Fig 1 Typical Reverse Characteristic

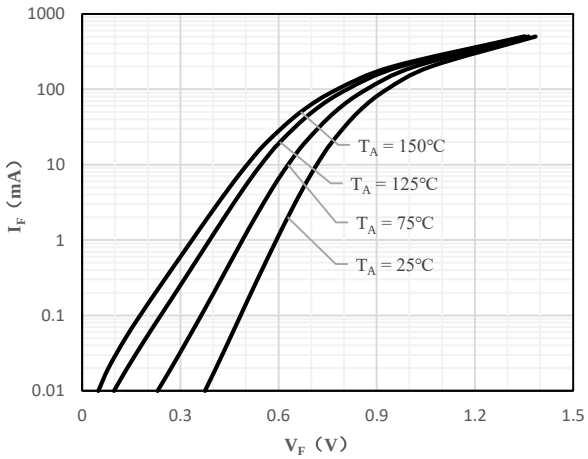


Fig 2 Typical Forward Characteristics


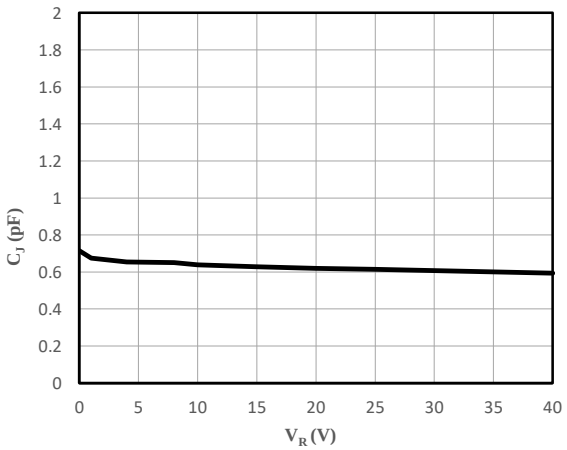


Fig 3 Capacitance vs. Reverse Voltage


Package Outline Dimensions (Unit: mm)

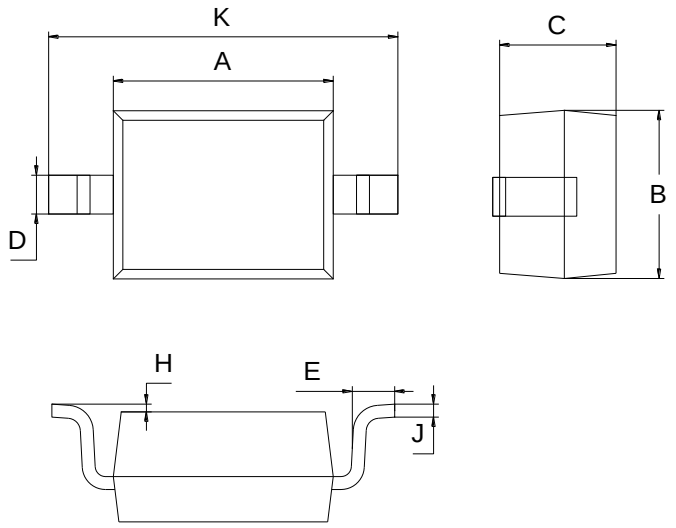

SOD-323		
Dimension	**Min.**	**Max.**
A	1.60	1.80
B	1.20	1.40
C	0.80	0.90
D	0.25	0.35
E	0.22	0.42
H	0.02	0.10
J	0.05	0.15
K	2.55	2.75

Mounting Pad Layout (Unit: mm)

SOD-323

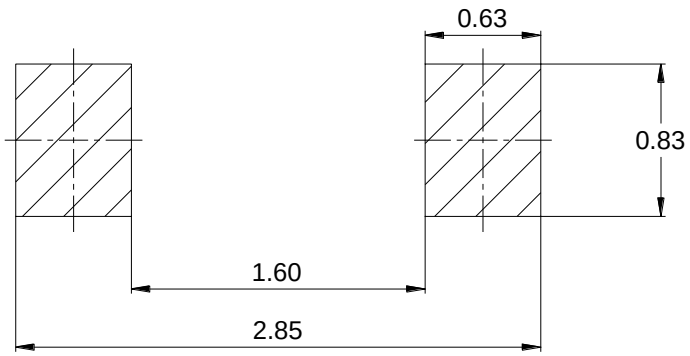

Important Notice

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.