

Features


- Fast switching speed
- High reverse breakdown voltage
- Low leakage current
- Halogen free
- Qualified to AEC-Q101 standards for high reliability

HF

1 CATHODE 2 ANODE

Mechanical Data

- Case: SOD-123
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208



SOD-123

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
TBAV3004W	SOD-123	3000 pcs / Tape & Reel	4P

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Repetitive Peak Reverse Voltage	V _{RRM}	350	V
Working Peak Reverse Voltage	V _{RWM}	300	V
DC Blocking Voltage	V _R	300	V
RMS Reverse Voltage	V _{R(RMS)}	212	V
Forward Continuous Current	I _F	225	mA
Repetitive Peak Forward Current	I _{FRM}	625	mA
Peak Forward Surge Current, 1μs Single Half-sine-wave	I _{FSM}	4	A
Peak Forward Surge Current, 1s Single Half-sine-wave	I _{FSM}	1	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P _D	400	mW
Thermal Resistance Junction-to-Air *1	R _{θJA}	270	°C/W
Thermal Resistance Junction-to-Case *1	R _{θJC}	170	°C/W
Thermal Resistance Junction-to-Lead *1	R _{θJL}	190	°C/W
Operating Junction Temperature Range	T _J	-65 ~ +150	°C
Storage Temperature Range	T _{STG}	-65 ~ +150	°C

Note 1: The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage	$V_{(BR)R}$	$I_R = 150\mu\text{A}$	350	-	-	V
Forward Voltage	V_F	$I_F = 20\text{mA}$	-	0.78	0.87	V
		$I_F = 100\text{mA}$	-	0.93	1.00	V
		$I_F = 200\text{mA}$	-	1.03	1.25	V
Maximum Peak Reverse Current	I_R	$V_R = 240\text{V}, T_J = 25^\circ\text{C}$	-	30	100	nA
		$V_R = 240\text{V}, T_J = 150^\circ\text{C}$	-	35	100	μA
Total Capacitance	C_J	$V_R = 0\text{V}, f = 1.0\text{MHz}$	-	1	5	pF
Reverse Recovery Time	t_{rr}	$I_F = I_R = 30\text{mA}$ $I_{rr} = 0.1 \times I_R, R_L = 100\Omega$	-	-	50	ns

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

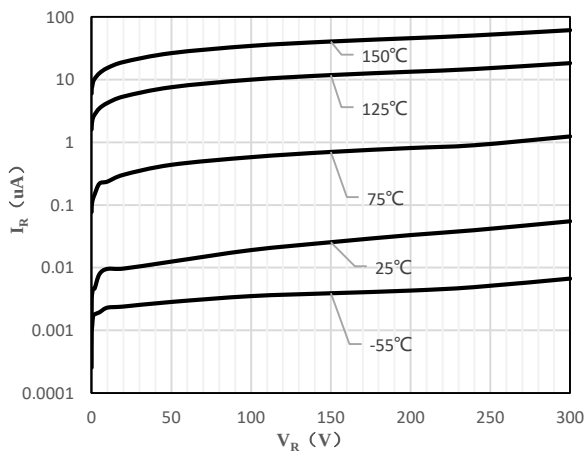


Fig 1 Typical Reverse Characteristic

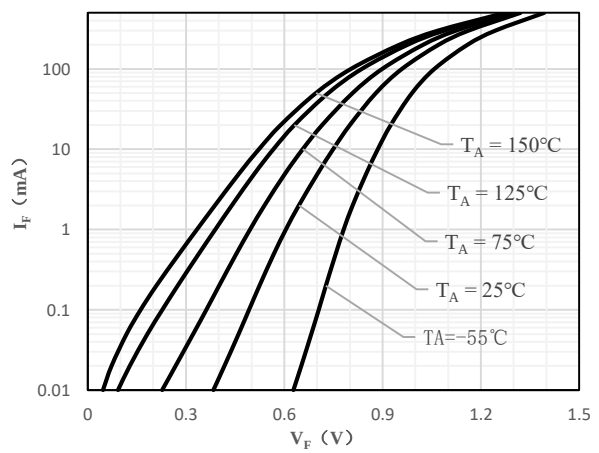


Fig 2 Typical Forward Characteristics

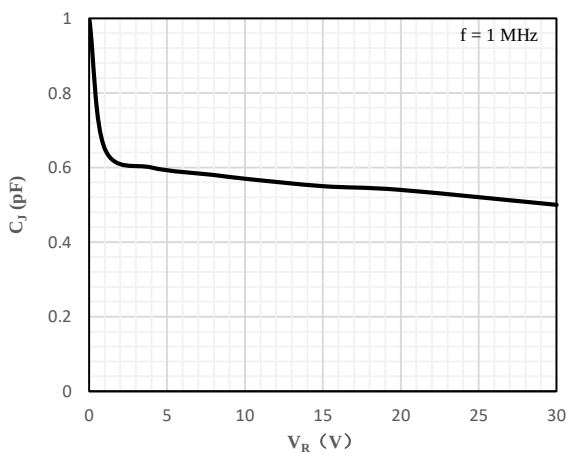


Fig 3 Capacitance vs. Reverse Voltage


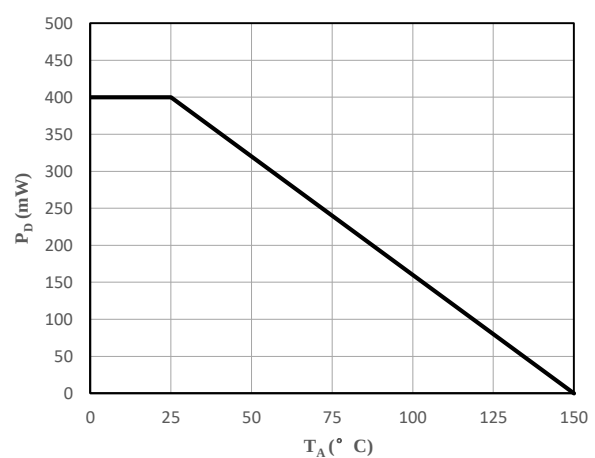


Fig 4 Power Derating Curve


Package Outline Dimensions (Unit: mm)

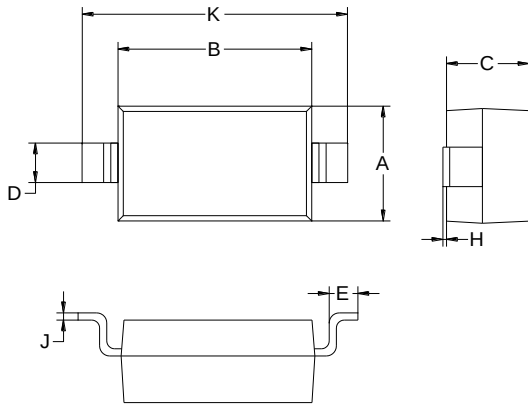

SOD-123		
Dimension	Min.	Max.
A	1.45	1.75
B	2.55	2.85
C	1.00	1.30
D	0.50	0.60
E	0.25	0.45
H	0.02	0.10
J	0.05	0.15
K	3.55	3.85

Package Outline Dimensions (Unit: mm)

SOD-123

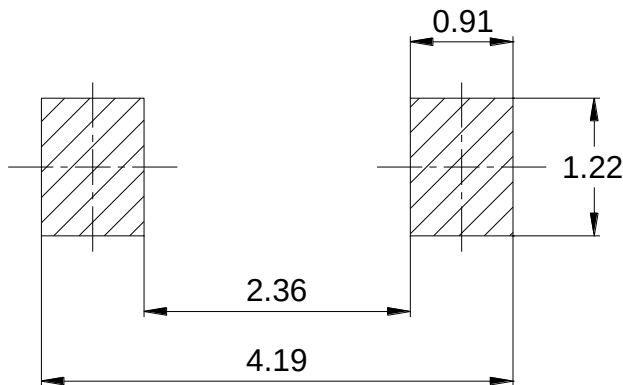

Important Notice

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.