


Zener Diodes

TBZG03C - SERIES

Features

- High reliability
- Voltage range 10 V to 270 V
- High surge current rating
- RoHS compliant with Halogen-free
- Qualified to AEC-Q101 Standards



Mechanical Data

- Case: SMA molded plastic
- Molding compound, UL flammability classification rating 94V-0
- Polarity: Color band denotes cathode end

Maximum Ratings (@T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Power dissipation at T _{tp} = 100°C	P _{tot}	3	W
Forward voltage @ I _F = 500mA	V _F	1.2	V
Thermal Resistance Junction-to-Air *1	R _{θJA}	70	°C/W
Thermal Resistance Junction-to-Case *1	R _{θJC}	25	°C/W
Thermal Resistance Junction-to-Lead *1	R _{θJL}	30	°C/W
Peak reverse power dissipation(non-repetitive) tp=100μs square wave	P _{ZSM}	600	W
Junction temperature	T _J	-55 ~ +150	°C
Storage temperature range	T _{STG}	-55 ~ +150	°C

Note *1: Device mounted on p.c.b. with 10 mm x 20 mm x 0.1 mm copper pad area

Zener Diodes

TBZG03C - SERIES

Electrical Characteristics (@T_A = 25°C unless otherwise specified)

Type	Device marking code	Zener voltage range V _Z			Dynamic resistance			Temperature coefficient of zener		Reverse leakage current	
					r _{ZJ} @I _{ZT}		I _{ZT}	T _{KVZ} @I _{ZT}			
		V	V	V	Ω	Ω	m A	%/K	%/K	uA	V
Min	Typ	Max	Typ	Max		Typ	Max	Max			
TBZG03C10	G10	9.4	10	10.6	2.0	4.0	50	0.05	0.09	10	7.5
TBZG03C11	G11	10.4	11	11.6	4.0	7.0	50	0.05	0.10	4.0	8.2
TBZG03C12	G12	11.4	12	12.7	4.0	7.0	50	0.05	0.10	3.0	9.1
TBZG03C13	G13	12.4	13	14.1	5.0	10	50	0.05	0.10	2.0	10
TBZG03C15	G15	13.8	15	15.6	5.0	10	50	0.05	0.10	1.0	11
TBZG03C16	G16	15.3	16	17.1	6.0	15	25	0.06	0.11	1.0	12
TBZG03C18	G18	16.8	18	19.1	6.0	15	25	0.06	0.11	1.0	13
TBZG03C20	G20	18.8	20	21.2	6.0	15	25	0.06	0.11	1.0	15
TBZG03C22	G22	20.8	22	23.3	6.0	15	25	0.06	0.11	1.0	16
TBZG03C24	G24	22.8	24	25.6	7.0	15	25	0.06	0.11	1.0	18
TBZG03C27	G27	25.1	27	28.9	7.0	15	25	0.06	0.11	1.0	20
TBZG03C30	G30	28	30	32	8.0	15	25	0.06	0.11	1.0	22
TBZG03C33	G33	31	33	35	8.0	15	25	0.06	0.11	1.0	24
TBZG03C36	G36	34	36	38	21	40	10	0.06	0.11	1.0	27
TBZG03C39	G39	37	39	41	21	40	10	0.06	0.11	1.0	30
TBZG03C43	G43	40	43	46	24	45	10	0.07	0.12	1.0	33
TBZG03C47	G47	44	47	50	24	45	10	0.07	0.12	1.0	36
TBZG03C51	G51	48	51	54	25	60	10	0.07	0.12	1.0	39
TBZG03C56	G56	52	56	60	25	60	10	0.07	0.12	1.0	43
TBZG03C62	G62	58	62	66	25	80	10	0.08	0.13	1.0	47
TBZG03C68	G68	64	68	72	25	80	10	0.08	0.13	1.0	51
TBZG03C75	G75	70	75	79	30	100	10	0.08	0.13	1.0	56
TBZG03C82	G82	77	82	87	30	100	10	0.08	0.13	1.0	62
TBZG03C91	G91	85	91	96	60	200	5.0	0.09	0.13	1.0	68

Zener Diodes





TBZG03C - SERIES

Type	Device marking code	Zener voltage range V_Z			Dynamic resistance			Temperature coefficient of zener $T_{KVZ}@I_{ZT}$		Reverse leakage current	
		V	V	V	Ω	Ω	m A	%/K	%/K	μA	V
		Min	Typ	Max	Typ	Max		Typ	Max	Max	
TBZG03C100	G100	94	100	106	60	200	5.0	0.09	0.13	1.0	75
TBZG03C110	G110	104	110	116	80	250	5.0	0.09	0.13	1.0	82
TBZG03C120	G120	114	120	127	80	250	5.0	0.09	0.13	1.0	91
TBZG03C130	G130	124	130	141	110	300	5.0	0.09	0.13	1.0	100
TBZG03C150	G150	138	150	156	130	300	5.0	0.09	0.13	1.0	110
TBZG03C160	G160	158	160	171	150	350	5.0	0.09	0.13	1.0	120
TBZG03C180	G180	168	180	191	180	400	5.0	0.09	0.13	1.0	130
TBZG03C200	G200	188	200	212	200	500	5.0	0.09	0.13	1.0	150
TBZG03C220	G220	208	220	233	350	750	2.0	0.09	0.13	1.0	160
TBZG03C240	G240	228	240	256	400	850	2.0	0.09	0.13	1.0	180
TBZG03C270	G270	251	270	289	450	1000	2.0	0.09	0.13	1.0	200

Zener Diodes

TBZG03C - SERIES


Ratings and Characteristic Curves (@T_A=25°C unless otherwise noted)

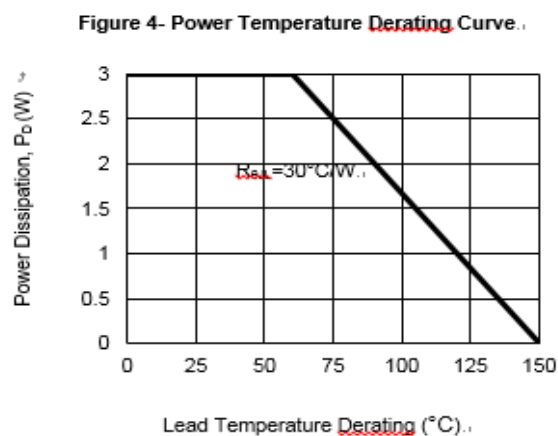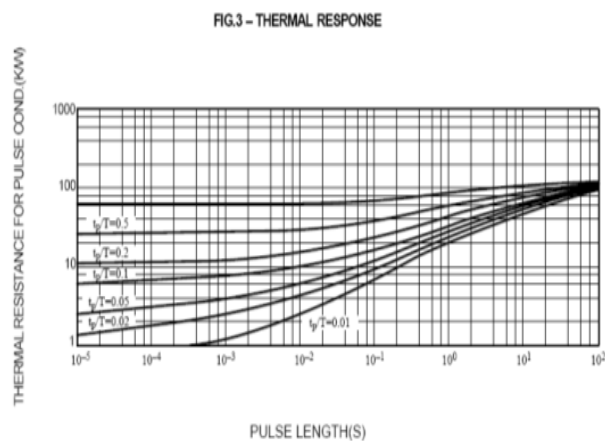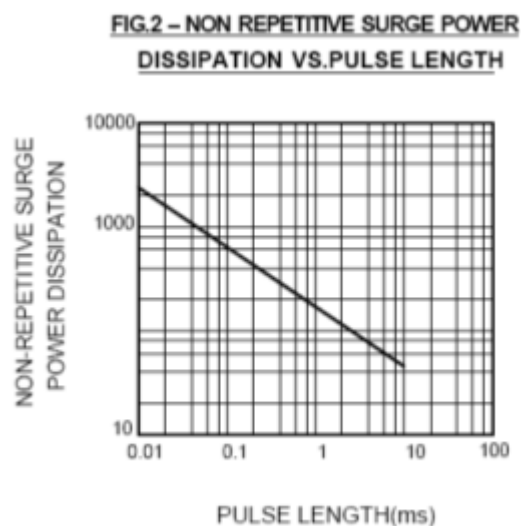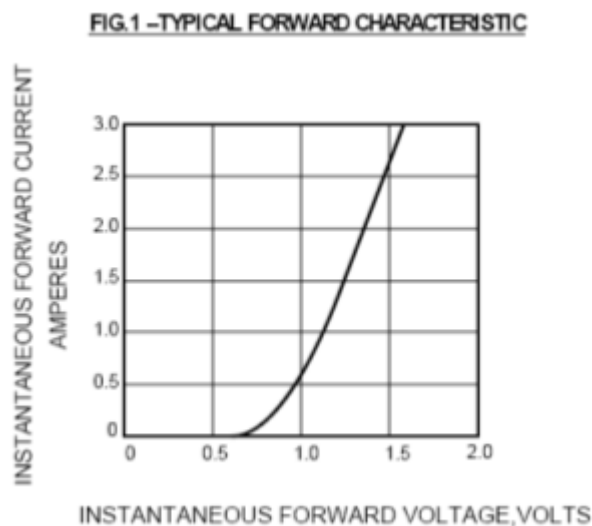


Zener Diodes

TBZG03C - SERIES

Package Outline Dimensions (Unit: mm)

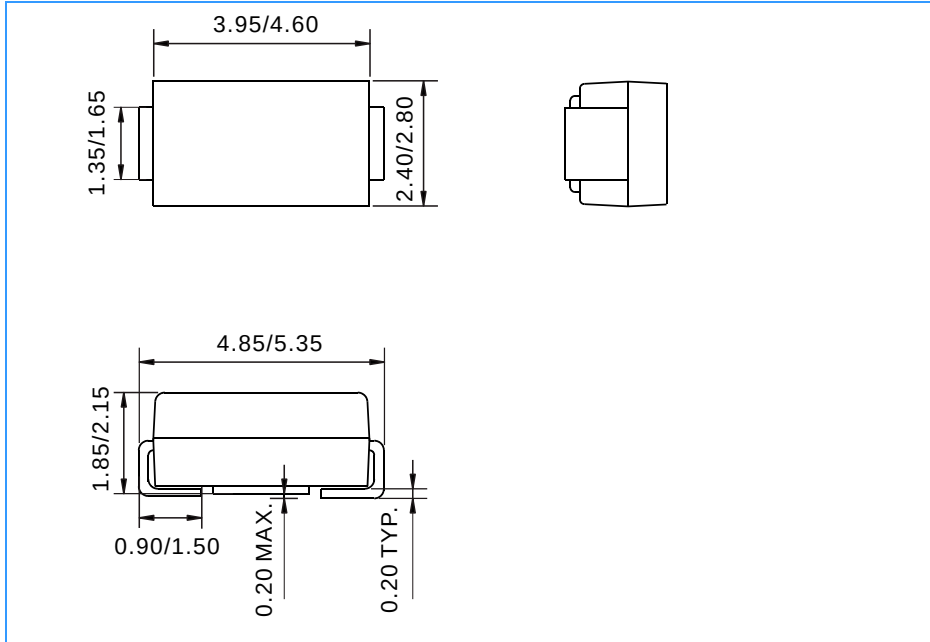

Mounting Pad Layout (Unit: mm)

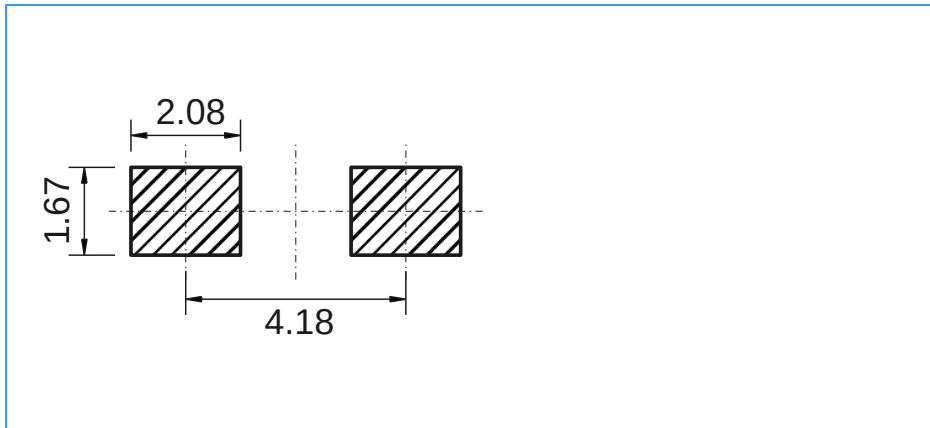

Ordering Information

Part Number	Package	Shipping Quantity
TBZG03C - SERIES	SMA	5000 pcs / Tape & Reel