


## Features


- Tight voltage tolerance:  $\pm 5\%$
- Ultra low-profile package well suited for automated assembly
- Moisture sensitivity level 1
- Halogen free
- Qualified to AEC-Q101 standards for high reliability

**HF**



## Mechanical Data

- Case: SOD-123
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208



**SOD-123**

## Ordering Information

| Part Number | Package | Shipping Quantity      | Marking Code |
|-------------|---------|------------------------|--------------|
| TBZT52C6V8  | SOD-123 | 3000 pcs / Tape & Reel | WB           |

## Thermal Characteristics


| Parameter                                         | Symbol          | Value      | Unit                 |
|---------------------------------------------------|-----------------|------------|----------------------|
| Power Dissipation                                 | $P_D$           | 500        | mW                   |
| Thermal Resistance Junction-to-Air <sup>*1</sup>  | $R_{\theta JA}$ | 250        | $^{\circ}\text{C/W}$ |
| Thermal Resistance Junction-to-Case <sup>*1</sup> | $R_{\theta JC}$ | 150        | $^{\circ}\text{C/W}$ |
| Thermal Resistance Junction-to-Lead <sup>*1</sup> | $R_{\theta JL}$ | 180        | $^{\circ}\text{C/W}$ |
| Operating Junction Temperature Range              | $T_J$           | -55 ~ +150 | $^{\circ}\text{C}$   |
| Storage Temperature Range                         | $T_{STG}$       | -65 ~ +150 | $^{\circ}\text{C}$   |

Note 1: The data tested by surface mounted on a 1 inch<sup>2</sup> FR-4 board with 2OZ copper


## Electrical Characteristics (@ $T_A = 25^{\circ}\text{C}$ unless otherwise specified)

| Parameter               | Symbol   | Test Condition        | Min. | Typ.  | Max. | Unit                   |
|-------------------------|----------|-----------------------|------|-------|------|------------------------|
| Zener Voltage           | $V_Z$    | $I_{ZT} = 5\text{mA}$ | 6.46 | 6.80  | 7.14 | V                      |
| Forward Voltage         | $V_F$    | $I_F = 10\text{mA}$   | -    | -     | 0.9  | V                      |
| Maximum Reverse Current | $I_R$    | $V_R = 4\text{V}$     | -    | -     | 2    | $\mu\text{A}$          |
| Maximum Zener Impedance | $Z_{ZT}$ | $I_{ZT} = 5\text{mA}$ | -    | -     | 15   | $\Omega$               |
| Maximum Zener Impedance | $Z_{ZK}$ | $I_{ZK} = 1\text{mA}$ | -    | -     | 80   | $\Omega$               |
| Temperature Coefficient | $T_C$    | $I_{ZT} = 5\text{mA}$ | 1.2  | 2.923 | 4.5  | mV/ $^{\circ}\text{C}$ |


**TYPICAL CHARACTERISTICS** (@  $T_A = 25^\circ\text{C}$  unless otherwise specified)

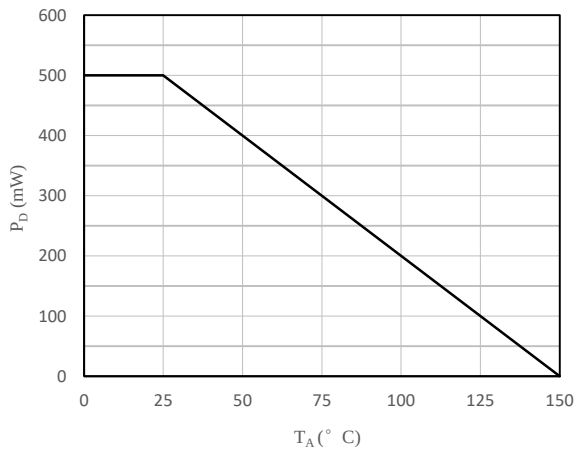


**Fig 1 Steady State Power Derating**

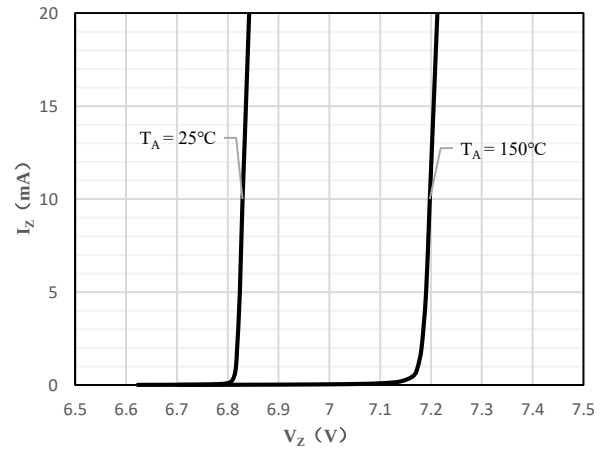


**Fig 2 Typical Zener Breakdown Characteristics**

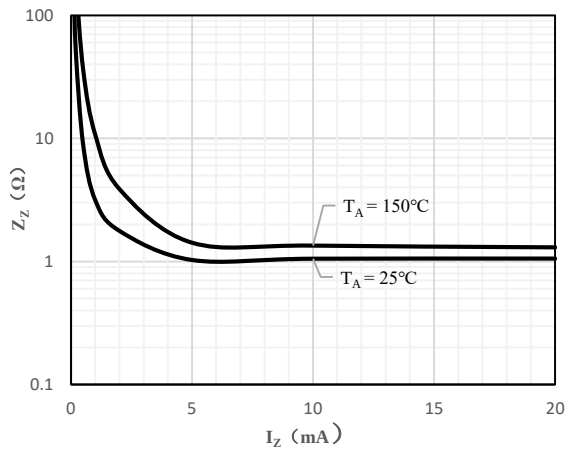

**Fig 3 Zener Impedance vs. Zener Current**

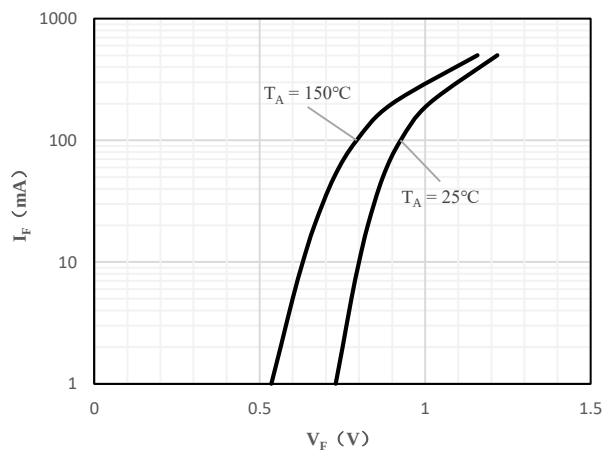


**Fig 4 Typical Forward Characteristics**

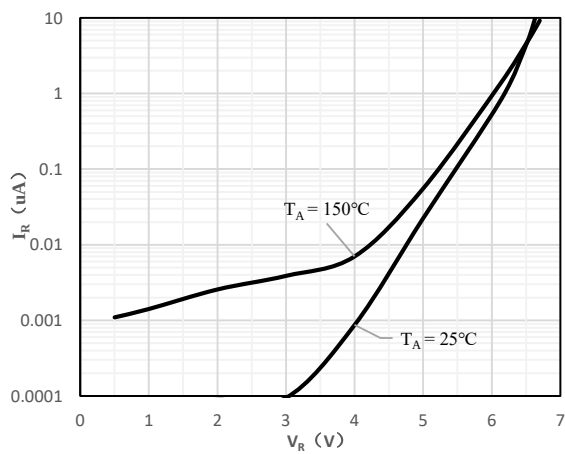

**Fig 5 Typical Reverse Characteristics**

**Package Outline Dimensions** (Unit: mm)

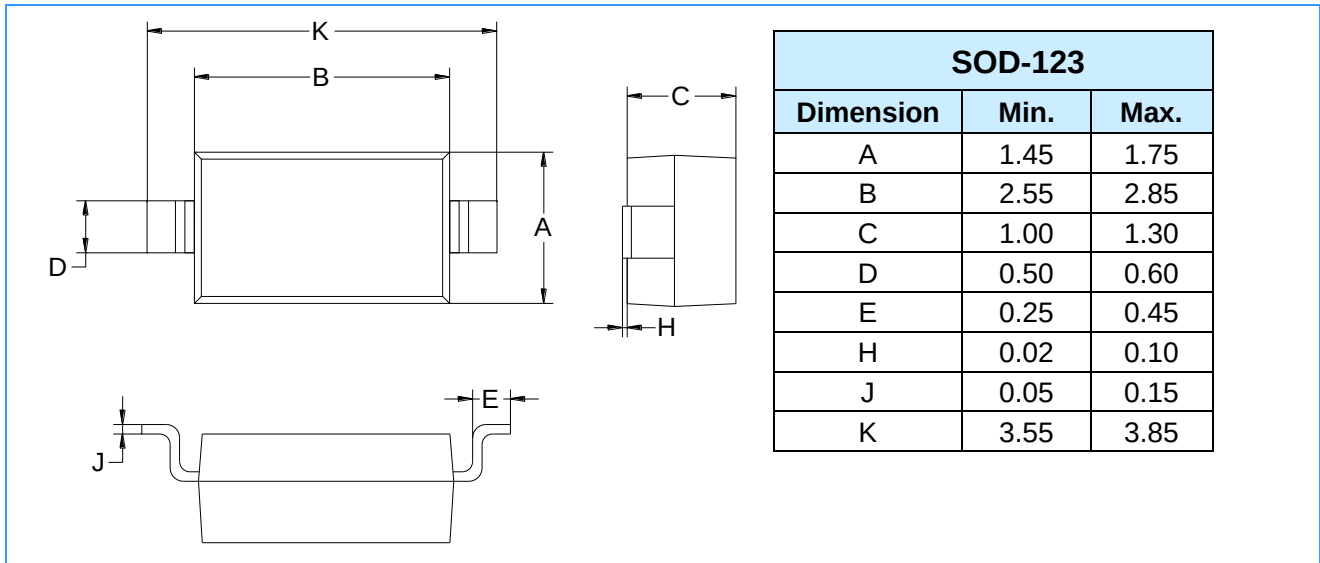

**Package Outline Dimensions** (Unit: mm)

**SOD-123**

