



Features

- High DC current gain
- Low saturation voltage
- Suitable for driver stage of small motor
- Complimentary to TKTA1298
- Halogen free
- RoHS compliant with Halogen-free
- Qualified to AEC-Q101 Standards

HF



SOT-23

Mechanical Data

- Case: SOT-23
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Tin-plated; solderability per MIL-STD-202, Method 208

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
TKTC3265-O	SOT-23	3000 pcs / Tape & Reel	EO
TKTC3265-Y	SOT-23	3000 pcs / Tape & Reel	EY

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Collector-Base Breakdown Voltage	V _{CBO}	35	V
Collector-Emitter Breakdown Voltage	V _{CEO}	30	V
Emitter-Base Breakdown Voltage	V _{EBO}	5	V
Collector Current (Continuous)	I _C	0.8	A
Collector Current (Peak)	I _{CM}	1.6	A
Power Dissipation	P _D	0.2	W
Junction Temperature Range	T _J	-55 ~ +150	°C
Storage Temperature Range	T _{STG}	-55 ~ +150	°C

Thermal Characteristics

Parameter	Symbol	Value	Unit
Thermal Resistance Junction-to-Air ^{*1}	R _{θJA}	330	°C/W
Thermal Resistance Junction-to-Case ^{*1}	R _{θJC}	150	°C/W
Thermal Resistance Junction-to-Lead ^{*1}	R _{θJL}	125	°C/W

Note 1: The data tested by surface mounted on a 15mm * 15mm * 1mm FR4-epoxy P.C.B

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 1\text{mA}, I_E = 0$	35	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 10\text{mA}, I_B = 0$	30	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 1\text{mA}, I_C = 0$	5	-	-	V
Collector Cut-off Current	I_{CBO}	$V_{CB} = 30\text{V}, I_E = 0$	-	-	0.1	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB} = 5\text{V}, I_C = 0$	-	-	0.1	μA
DC Current Gain	h_{FE}	$V_{CE} = 1\text{V}, I_C = 0.1\text{A}$	100	-	320	-
		$V_{CE} = 1\text{V}, I_C = 0.8\text{A}$	40	-	-	-
Collector-emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 0.8\text{A}, I_B = 0.08\text{A}$	-	-	0.5	V
Base-emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 0.8\text{A}, I_B = 0.08\text{A}$	-	-	1.2	V
Base-emitter on Voltage	$V_{BE(on)}$	$V_{CE} = 1\text{V}, I_C = 10\text{mA}$	0.5	-	0.8	V
Transition Frequency	f_T	$I_C = 10\text{mA}, V_{CE} = 5\text{V}$ $f = 100\text{MHz}$	100	-	-	MHz
Collector Output Capacitance	C_{OB}	$V_{CB} = 10\text{V}, I_E = 0, f = 1\text{MHz}$	-	13	-	pF

Classification of h_{FE}

Rank	O	Y
Range	100-200	160-320
Marking	EO	EY

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

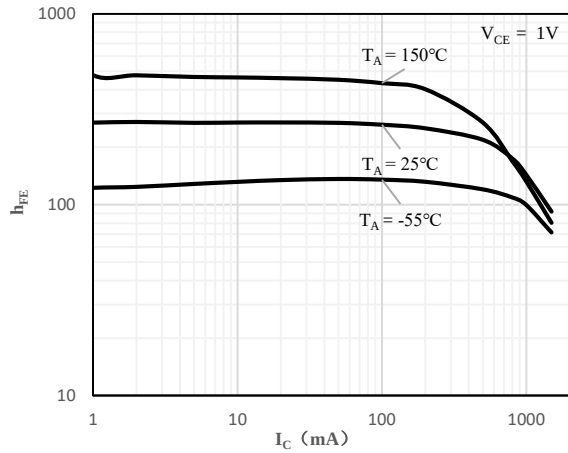


Fig 1 h_{FE} vs. I_C

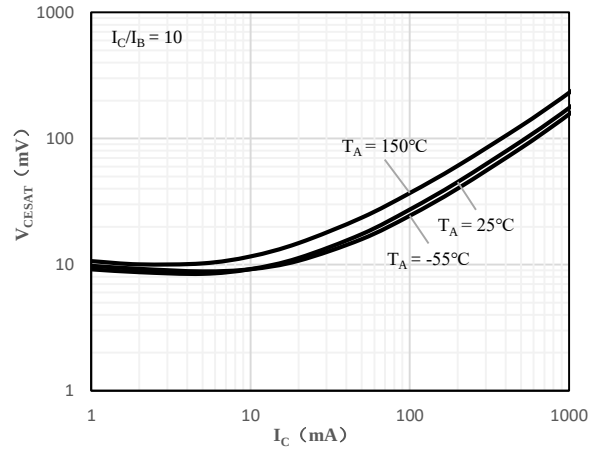


Fig 2 $V_{CE(sat)}$ vs. I_C

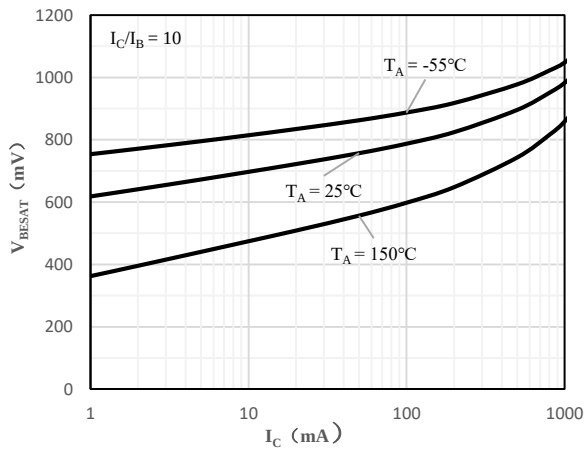


Fig 3 $V_{BE(sat)}$ vs. I_C

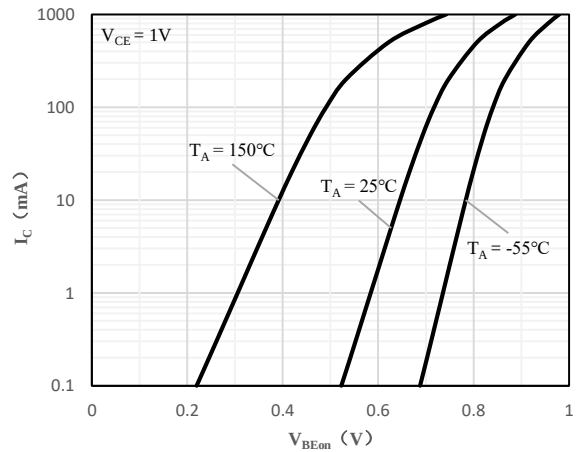


Fig 4 $V_{BE(on)}$ vs. I_C


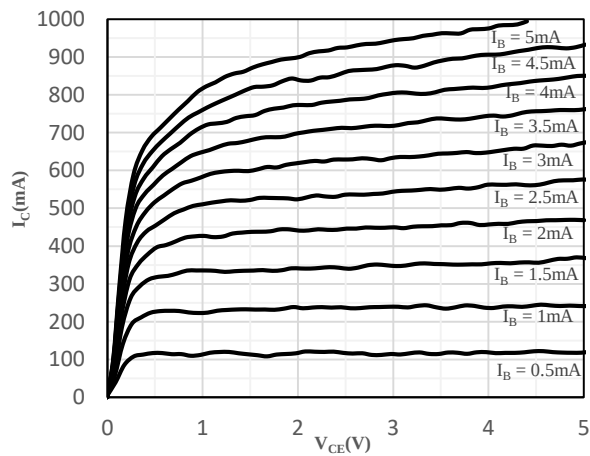


Fig 5 I_C vs. V_{CE}

Package Outline Dimensions (Unit: mm)

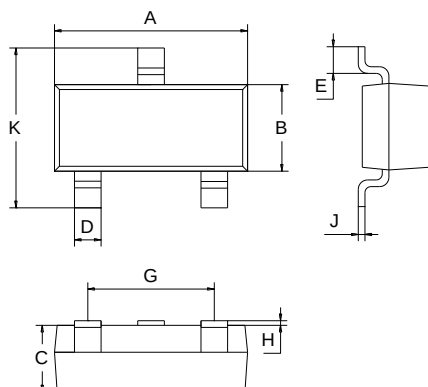

SOT-23		
Dimension	Min.	Max.
A	2.70	3.10
B	1.10	1.50
C	0.90	1.10
D	0.30	0.50
E	0.35	0.48
G	1.80	2.00
H	0.02	0.10
J	0.05	0.15
K	2.20	2.60

Package Outline Dimensions (Unit: mm)

SOT-23

