


Features

- Fast switching speed
- High conductance
- Halogen free
- Qualified to AEC-Q101 standards for high reliability

HF



SOD-123

Mechanical Data

- Case: SOD-123
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
TMMSD4148	SOD-123	3000 pcs / Tape & Reel	5I

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Maximum Repetitive Reverse Voltage	V _{RRM}	100	V
Average Rectified Forward Current	I _{F(AV)}	215	mA
Non-repetitive Peak Forward Surge Current (t = 1s)	I _{FSM}	1	A
Non-repetitive Peak Forward Surge Current (t = 1μs)	I _{FSM}	2	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P _D	400	mW
Thermal Resistance, Junction to Ambient	R _{θJA}	312	°C/W
Operating Temperature	T _J	-55 ~ +150	°C
Storage Temperature Range	T _{STG}	-55 ~ +150	°C

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage	$V_{(BR)R}$	$I_R = 100\mu\text{A}$	100	-	-	V
Forward Voltage	V_F	$I_F = 10\text{mA}$	-	-	1	V
Maximum Peak Reverse Current	I_R	$V_R = 20\text{V}$	-	-	25	nA
		$V_R = 75\text{V}$	-	-	5	μA
		$V_R = 20\text{V}, T_J = 150^\circ\text{C}$	-	-	50	μA
Diode Capacitance	C_D	$V_R = 0\text{V}, f = 1\text{MHz}$	-	-	4	pF
Reverse Recovery Time	t_{rr}	$I_F = I_R = 10\text{mA}$	-	-	4	ns

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

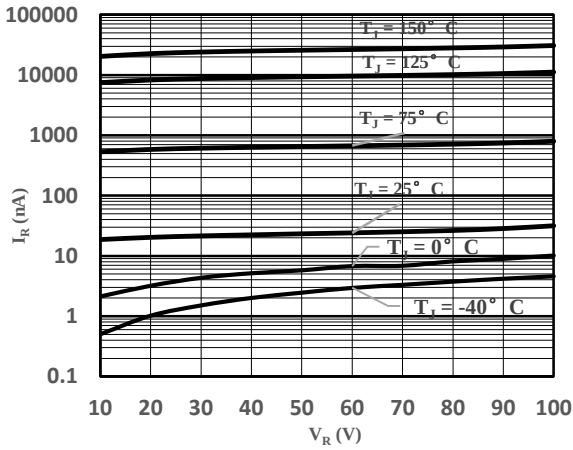


Fig 1 Typical Reverse Characteristic

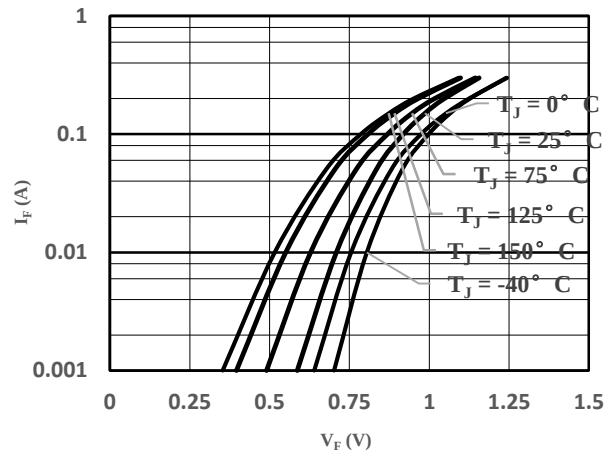


Fig 2 Typical Forward Characteristics

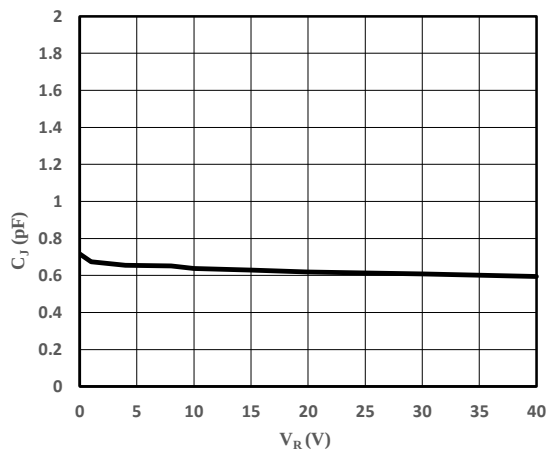


Fig 3 Capacitance vs. Reverse Voltage



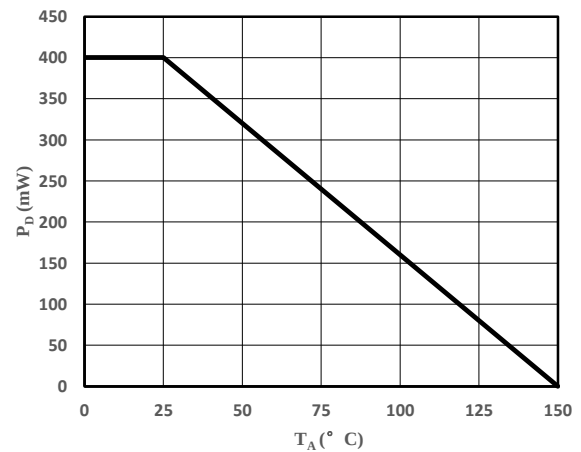


Fig 4 Power Derating Curve

Package Outline Dimensions (Unit: mm)

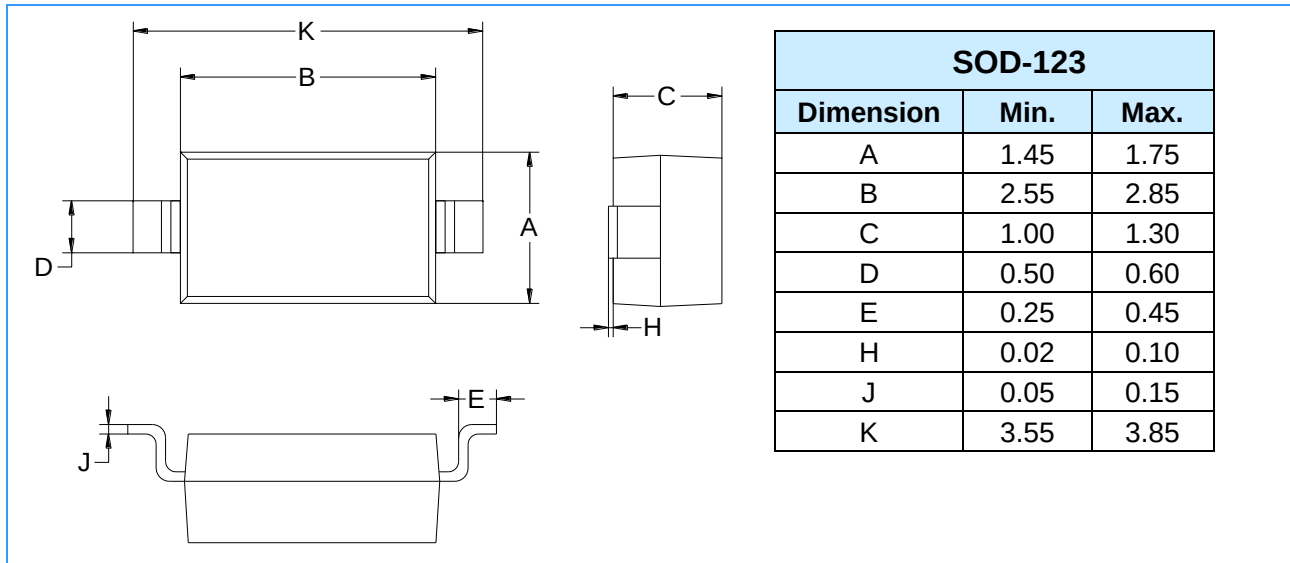

Package Outline Dimensions (Unit: mm)

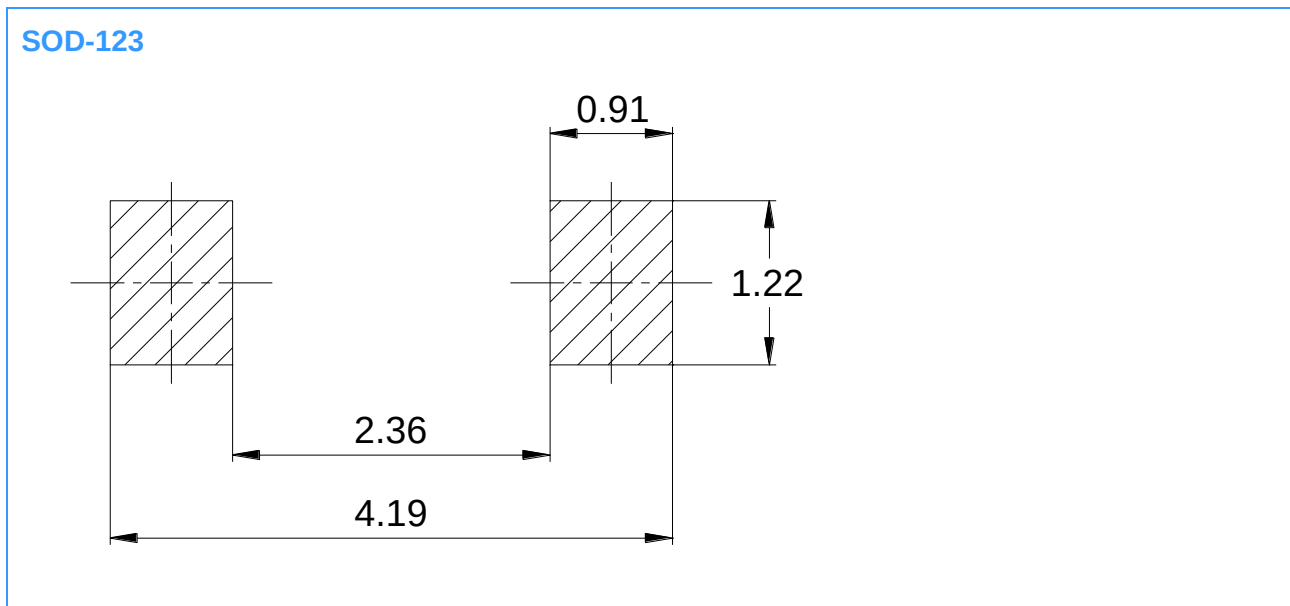

Important Notice

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.