
PNP Silicon Epitaxial Planar Transistor


TMMST2907A

Features

HF

- Epitaxial planar die construction
- Complimentary to TMMST2222A
- Ultra-small surface mount package
- Halogen free
- Qualified to AEC-Q101 standards for high reliability

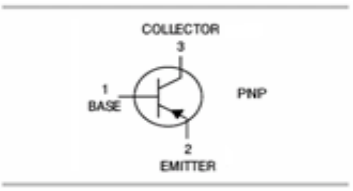



SOT-323

Mechanical Data

- Case: SOT-323
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Tin-plated; solderability per MIL-STD-202, Method 208

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
TMMST2907A	SOT-323	3000 pcs / Tape & Reel	K3F

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Collector-Base Breakdown Voltage	V_{CBO}	-60	V
Collector-Emitter Breakdown Voltage	V_{CEO}	-60	V
Emitter-Base Breakdown Voltage	V_{EBO}	-5	V
Collector Current (Continuous)	I_C	-0.6	A
Collector Current (Peak)	I_{CM}	-1.2	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation *1	P_D	0.2	W
Thermal Resistance Junction-to-Air *1	$R_{\theta JA}$	625	°C/W
Thermal Resistance Junction-to-Air *2	$R_{\theta JA}$	252	°C/W
Thermal Resistance Junction-to-Case *2	$R_{\theta JC}$	147	°C/W
Thermal Resistance Junction-to-Lead *2	$R_{\theta JL}$	174	°C/W
Junction Temperature	T_J	-55 ~ +150	°C
Storage Temperature Range	T_{STG}	-55 ~ +150	°C

Notes:

1. Device mounted on a minimum recommended pad layout with 1oz copper that is on a single-sided 1.6mm FR4 PCB; the device is measured under still air conditions whilst operating in a steady-state.
2. The data tested by surface mounted on a 25.4mm * 25.4mm * 1mm FR4-epoxy P.C.B

Electrical Characteristics (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	I_C = -10μA, I_E = 0	-60	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	I_C = -10mA, I_B = 0	-60	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	I_E = -10μA, I_C = 0	-5	-	-	V
Collector Cut-off Current	I_{CBO}	V_{CB} = -50V, I_E = 0	-	-	-10	nA
Collector Cut-off Current	I_{CEX}	V_{CE} = -30V, $V_{EB(OFF)}$ = -0.5V	-	-	-50	nA
Base Cut-off Current	I_{BL}	V_{CE} = -30V, $V_{EB(OFF)}$ = -0.5V	-	-	-50	nA
DC Current Gain	h_{FE}	V_{CE} = -10V, I_C = -0.1mA	75	-	-	-
		V_{CE} = -10V, I_C = -1mA	100	-	-	-
		V_{CE} = -10V, I_C = -10mA	100	-	-	-
		V_{CE} = -10V, I_C = -150mA	100	-	300	-
		V_{CE} = -10V, I_C = -500mA	50	-	-	-
Collector-emitter Saturation Voltage	$V_{CE(sat)}$	I_C = -500mA, I_B = -50mA	-	-	-1.6	V
		I_C = -150mA, I_B = -15mA	-	-	-0.4	V
Base-emitter Saturation Voltage	$V_{BE(sat)}$	I_C = -500mA, I_B = -50mA	-	-	-2.6	V
		I_C = -150mA, I_B = -15mA	-	-	-1.3	V
Transition Frequency	f_T	I_C = -50mA, V_{CE} = -20V f = 100MHz	200	-	-	MHz
Collector Output Capacitance	C_{OBO}	V_{CB} = -10V, I_E = 0, f = 1MHZ	-	-	8	pF
Input Capacitance	C_{IBO}	V_{EB} = -2V, I_C = 0, f = 1MHz	-	-	30	pF
Delay Time	t_d	V_{CC} = -30V, I_C = -150mA I_{B1} = -15mA	-	-	10	ns
Rise Time	t_r		-	-	40	ns
Storang Time	t_s	V_{CC} = -6V, I_C = -150mA I_{B1} = I_{B2} = -15mA	-	-	80	ns
Fall Time	t_f		-	-	30	ns

Ratings and Characteristics Curves (@ T_A = 25°C unless otherwise specified)

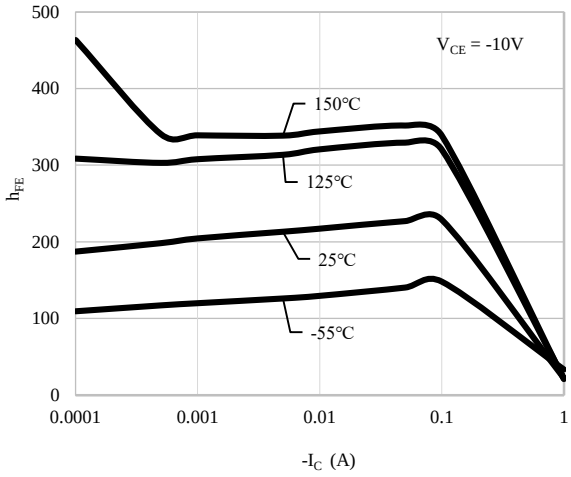


Fig 1 h_{FE} vs. I_C

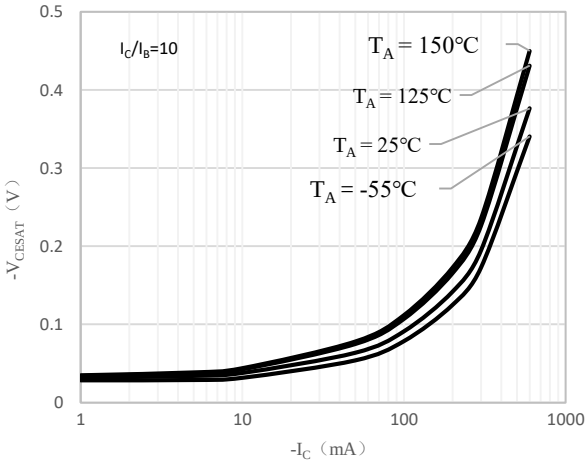


Fig 2 $V_{CE(sat)}$ vs. I_C

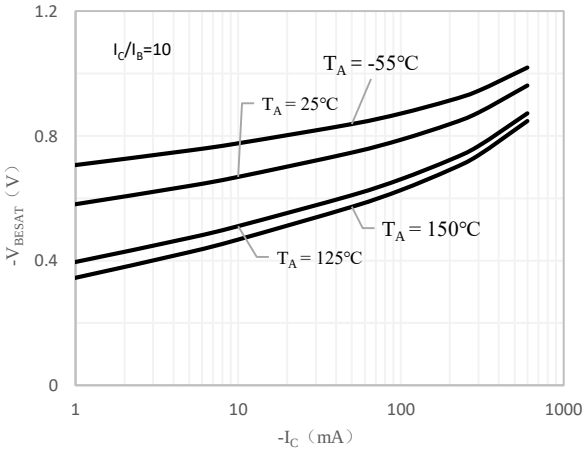


Fig 3 $V_{BE(sat)}$ vs. I_C


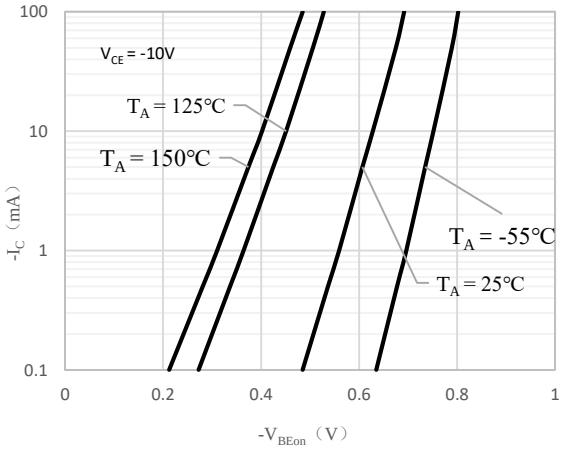


Fig 4 $V_{BE(ON)}$ vs. I_C


Package Outline Dimensions (Unit: mm)

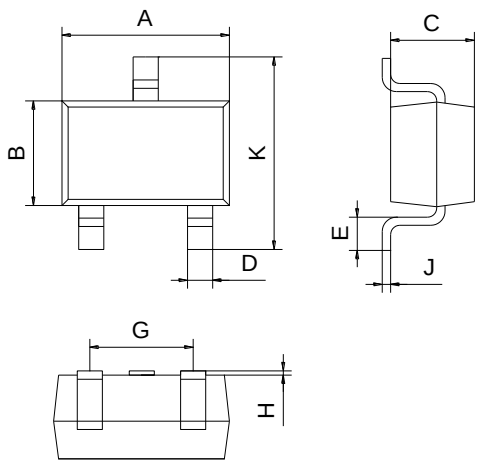

SOT-323		
Dimension	**Min.**	**Max.**
A	2.00	2.20
B	1.15	1.35
C	0.90	1.10
D	0.15	0.35
E	0.25	0.40
G	1.20	1.40
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40

Mounting Pad Layout (Unit: mm)

SOT-323

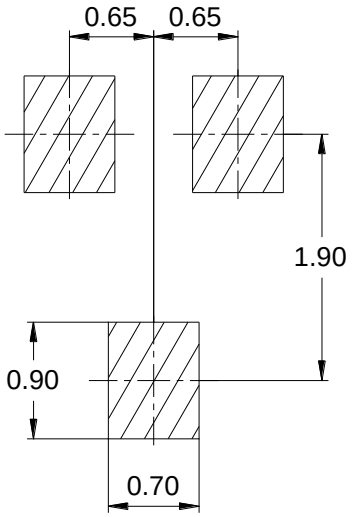

IMPORTANT NOTICE

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.