



Features

- Two DTC143E transistors are built-in a package
- Built-in biasing resistors (R_1 : 4.7k Ω , R_2 : 4.7k Ω)
- Transistor elements are independent, eliminating interference
- Mounting cost and area can be cut in half
- Halogen free
- Qualified to AEC-Q101 standards for high reliability

HF



SOT-363

Mechanical Data

- Case: SOT-363
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
TUMH15N	SOT-363	3000 pcs / Tape & Reel	H2

Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	50	V
V_{CEO}	Collector-Emitter Voltage	50	V
V_{EBO}	Emitter-Base Voltage	5	V
V_{CC}	Supply Voltage	50	V
V_I	Input Voltage	-10 to +30	V
I_O	Output Current	100	mA
$I_{C(Max)}$	Collector Current	100	mA

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation *1	P_D	300	mW
Thermal Resistance, Junction to Ambient Air	$R_{\theta JA}$	417	$^\circ\text{C/W}$
Operating Junction Temperature Range	T_J	-55 ~ +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ +150	$^\circ\text{C}$

Note 1: Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-base Cut-off Current	I_{CBO}	$V_{CB} = 50\text{V}, I_E = 0$	-	-	0.5	μA
Collector-emitter Cut-off Current	I_{CEO}	$V_{CE} = 30\text{V}, I_B = 0$	-	-	1	μA
Emitter-base Cut-off Current	I_{EBO}	$V_{EB} = 5\text{V}, I_C = 0$	-	-	1.8	mA
Input Voltage	$V_{I(OFF)}$	$V_{CC} = 5\text{V}, I_O = 100\mu\text{A}$	0.5	-	-	V
Input Voltage	$V_{I(ON)}$	$V_O = 0.3\text{V}, I_O = 20\text{mA}$	-	-	3	V
DC Current Gain	h_{FE}	$I_C = 10\text{mA}, V_{CE} = 5\text{V}$	20	-	-	-
Collector-Emitter saturation voltage	$V_{CE(sat)}$	$I_C/I_B = 10\text{mA}/0.5\text{mA}$	-	-	0.3	V
Input Resistor	R_1		3.29	4.7	6.11	$\text{k}\Omega$
Resistance ratio	R_2/R_1		0.8	1	1.2	-
Gain-Bandwidth Product	f_T	$V_{CE} = 10\text{V}, I_E = 5\text{mA}$ $f = 100\text{MHz}$	-	250	-	MHz

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

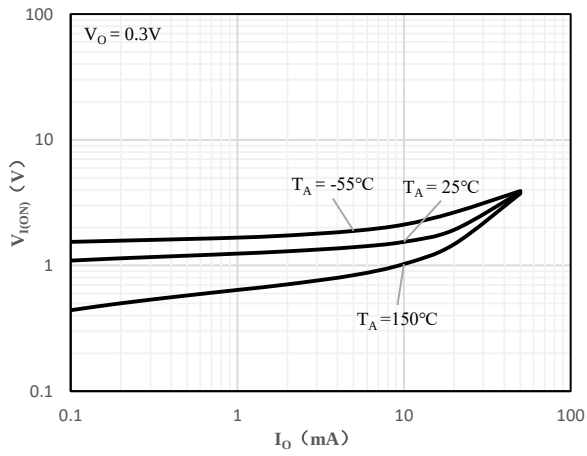


Fig 1 Input Voltage vs Output Current

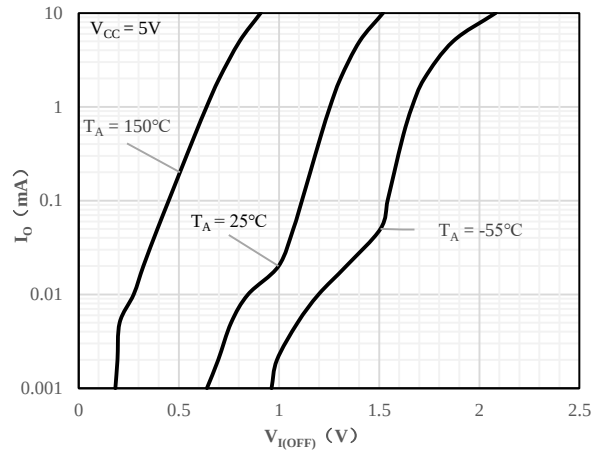


Fig 2 Output Current vs Input Voltage

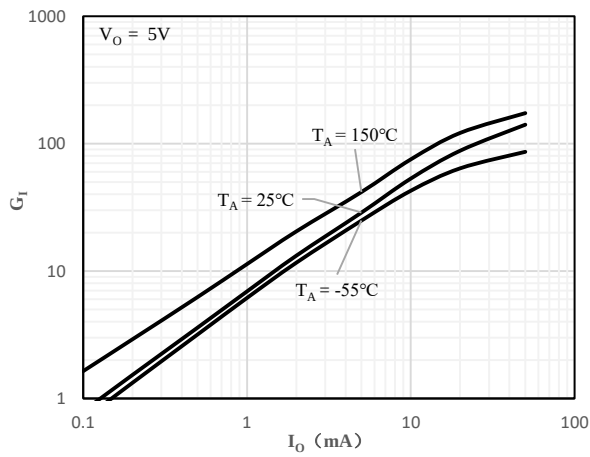


Fig 3 DC Current Gain vs Output Current


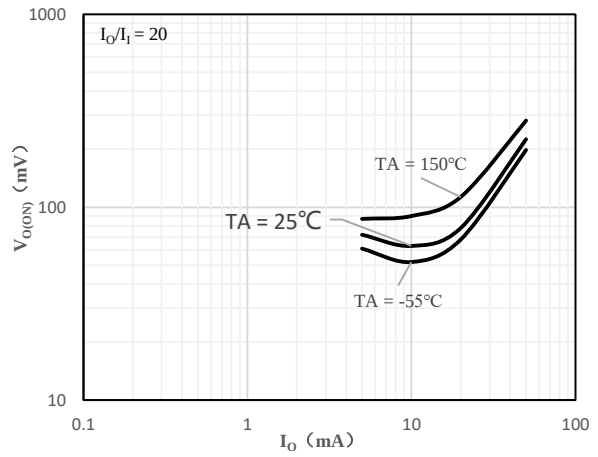


Fig 4 Output Voltage vs Output Current


Package Outline Dimensions (Unit: mm)

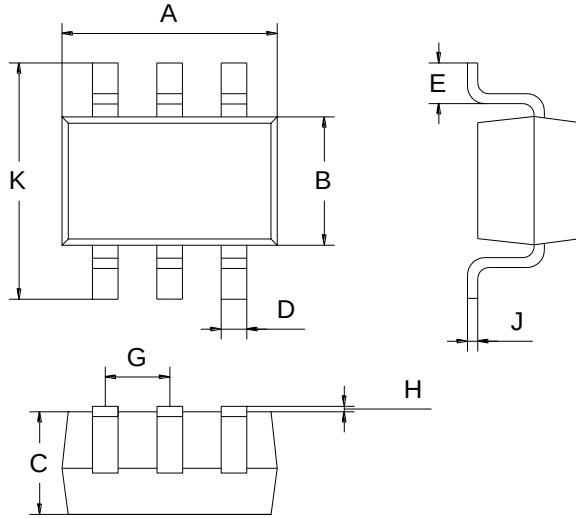

SOT-363		
Dimension	Min.	Max.
A	2.00	2.20
B	1.15	1.35
C	0.85	1.05
D	0.15	0.35
E	0.25	0.40
G	0.60	0.70
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40

Mounting Pad Layout (Unit: mm)

SOT-363

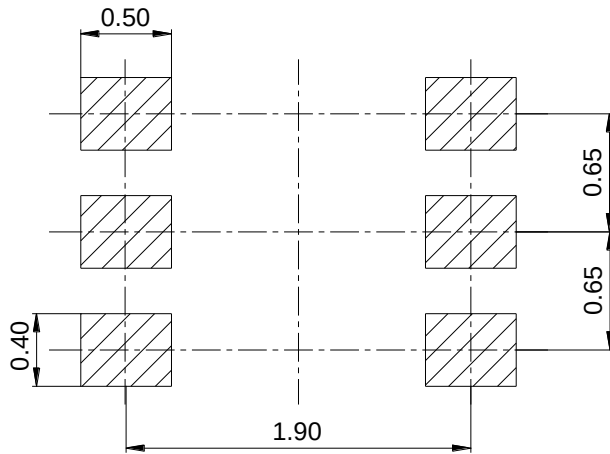

IMPORTANT NOTICE

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.