



Features

- Simplifies circuit design
- Reduces board space
- Reduces component count
- $R_1 = 22k\Omega$, $R_2 = 47k\Omega$
- Halogen free
- Qualified to AEC-Q101 standards for high reliability

HF

Mechanical Data

- Case: SOT-363
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208



SOT-363

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
TUNM2N	SOT-363	3000 pcs / Tape & Reel	34

Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value		Unit
		Q1	Q2	
Collector-Base Breakdown Voltage	V_{CBO}	-50	50	V
Collector-Emitter Breakdown Voltage	V_{CEO}	-50	50	V
Collector Current (Continuous)	I_C	-100	100	mA
Input Forward Voltage	$V_{IN(fwd)}$	-40	40	V
Input Reverse Voltage	$V_{IN(rev)}$	-7	7	V

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation($T_A = 25^\circ\text{C}$) *1	P_D	250	mW
Thermal Resistance Junction-to-Air *1	$R_{\theta JA}$	493	$^\circ\text{C/W}$
Thermal Resistance Junction-to-Lead *1	$R_{\theta JL}$	188	$^\circ\text{C/W}$
Operating Junction Temperature Range	T_J	-55 ~ +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ +150	$^\circ\text{C}$

Notes:

- 1、FR 4 @ Minimum Pad.
- 2、Pulsed Condition: Pulse Width = 300 ms, Duty Cycle 2%

Electrical Characteristics-Q2 (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector Cut-off Current	I _{CBO}	V _{CB} = 50V, I _E = 0	-	-	0.1	μA
Collector Cut-off Current	I _{CEO}	V _{CE} = 50V, I _B = 0	-	-	0.5	μA
Emitter Cut-off Current	I _{EBO}	V _{EB} = 6V, I _C = 0	-	-	0.13	mA
Collector-Base Breakdown Voltage	V _{CBO}	I _C = 10μA, I _E = 0)	50	-	-	V
Collector-Emitter Breakdown Voltage	V _{CEO}	I _C = 2mA, I _B = 0	50	-	-	V
DC Current Gain *2	h _{FE}	V _{CE} = 10V, I _C = 5mA	80	-	-	-
Collector-emitter Saturation Voltage	V _{CE(sat)}	I _C = 10mA, I _B = 1mA	-	-	0.25	V
Input voltage	V _{I(ON)}	V _{CE} = 0.2V, I _C = 3mA	-	1.3	-	V
Input voltage	V _{I(OFF)}	V _{CE} = 5V, I _C = 0.1mA	-	0.8	-	V
Output Voltage (On)	V _{OL}	V _{CC} = 5V, V _B = 2.5V R _L = 1kΩ	-	-	0.2	V
Output Voltage (Off)	V _{OH}	V _{CC} = 5V, V _B = 0.5V R _L = 1kΩ	4.9	-	-	V
Input Resistor	R ₁		15.4	22	28.6	kΩ
Resistance ratio	R ₁ /R ₂		0.38	0.47	0.56	-

Electrical Characteristics-Q1 (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector Cut-off Current	I _{CBO}	V _{CB} = -50V, I _E = 0	-	-	-0.1	μA
Collector Cut-off Current	I _{CEO}	V _{CE} = -50V, I _B = 0	-	-	-0.5	μA
Emitter Cut-off Current	I _{EBO}	V _{EB} = -6V, I _C = 0	-	-	-0.13	mA
Collector-Base Breakdown Voltage	V _{CBO}	I _C = -10μA, I _E = 0)	-50	-	-	V
Collector-Emitter Breakdown Voltage	V _{CEO}	I _C = -2mA, I _B = 0	-50	-	-	V
DC Current Gain *2	h _{FE}	V _{CE} = -10V, I _C = -5mA	80	-	-	-
Collector-emitter Saturation Voltage	V _{CE(sat)}	I _C = -10mA, I _B = -1mA	-	-	-0.25	V
Input voltage	V _{I(ON)}	V _{CE} = -0.2V, I _C = -3mA	-	-1.3	-	V
Input voltage	V _{I(OFF)}	V _{CE} = -5V, I _C = -0.1mA	-	-0.9	-	V
Output Voltage (On)	V _{OL}	V _{CC} = -5V, V _B = -2.5V R _L = 1kΩ	-	-	0.2	V
Output Voltage (Off)	V _{OH}	V _{CC} = -5V, V _B = -0.5V R _L = 1kΩ	4.9	-	-	V
Input Resistor	R ₁		15.4	22	28.6	kΩ
Resistance ratio	R ₁ /R ₂		0.38	0.47	0.56	-

Ratings and Characteristics Curves-Q2 (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

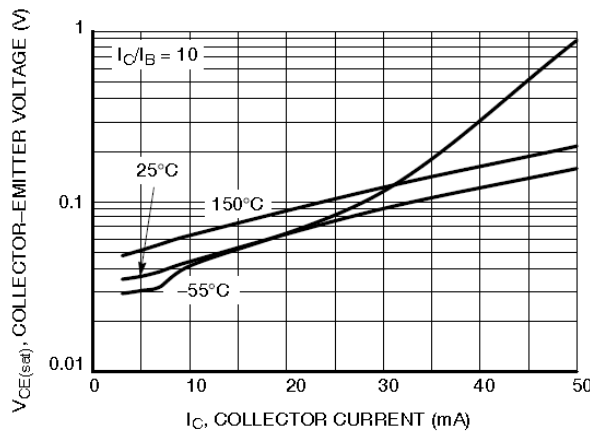


Figure 1. $V_{CE(sat)}$ vs. I_C

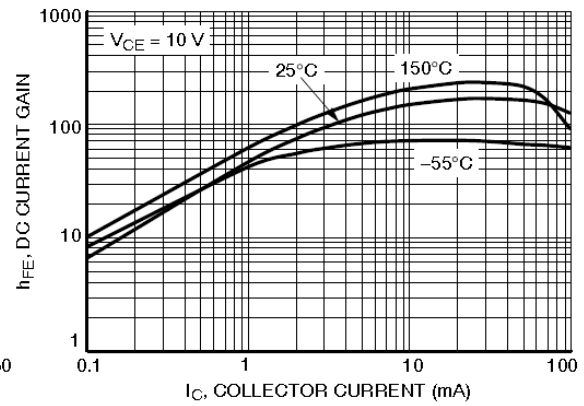


Figure 2. DC Current Gain

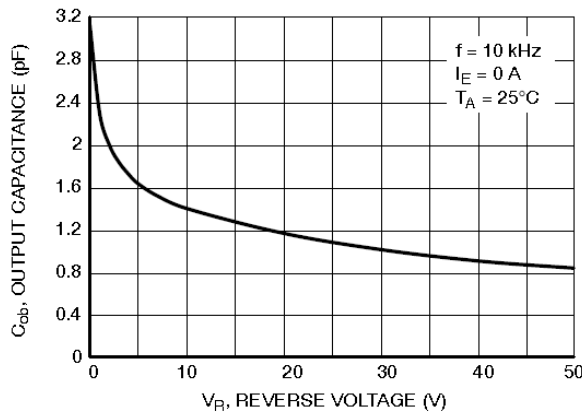


Figure 3. Output Capacitance

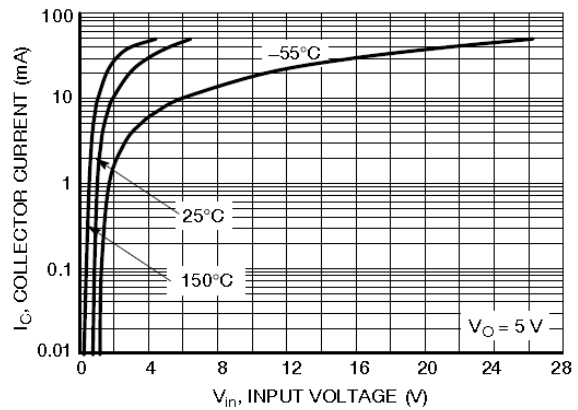


Figure 4. Output Current vs. Input Voltage

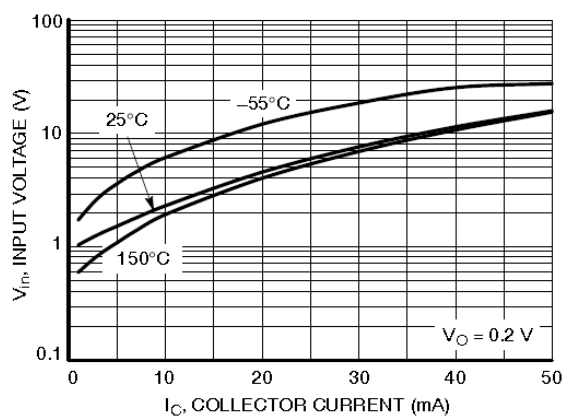


Figure 5. Input Voltage vs. Output Current

Ratings and Characteristics Curves-Q1 (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

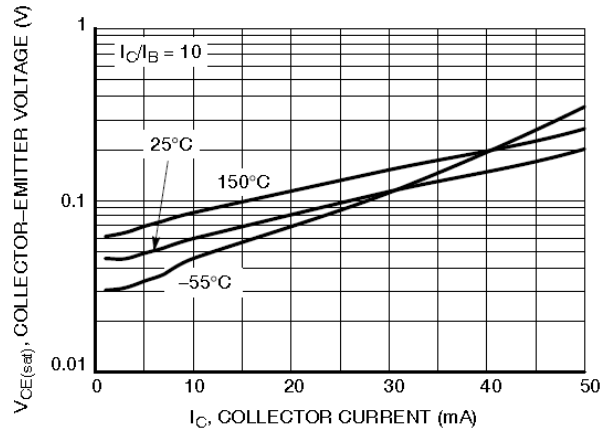


Figure 1. $V_{CE(sat)}$ vs. I_C

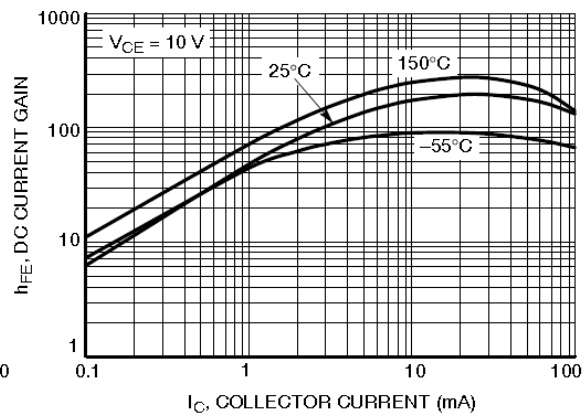


Figure 2. DC Current Gain

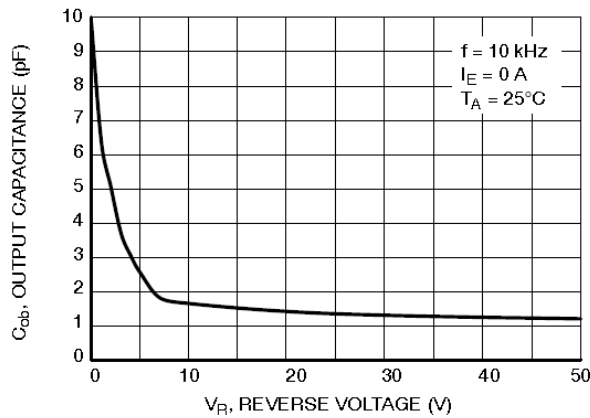


Figure 3. Output Capacitance

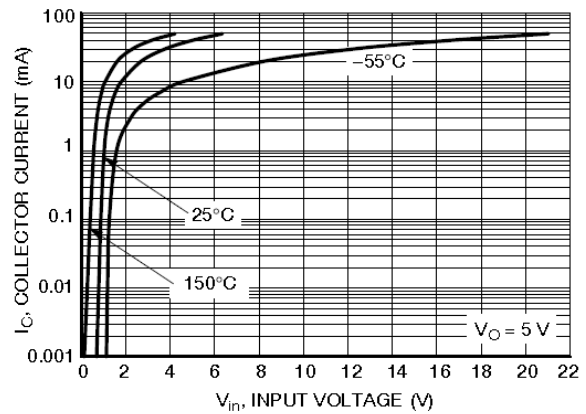


Figure 4. Output Current vs. Input Voltage


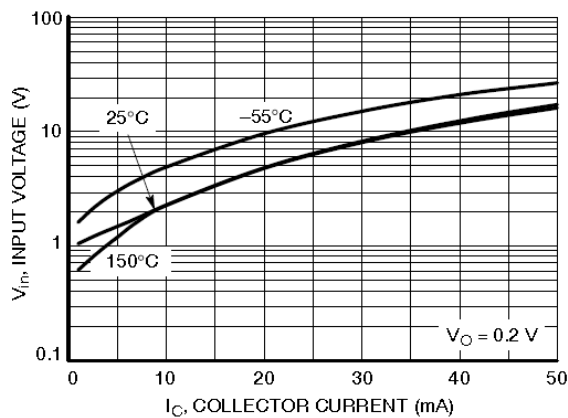


Figure 5. Input Voltage vs. Output Current


Package Outline Dimensions (Unit: mm)

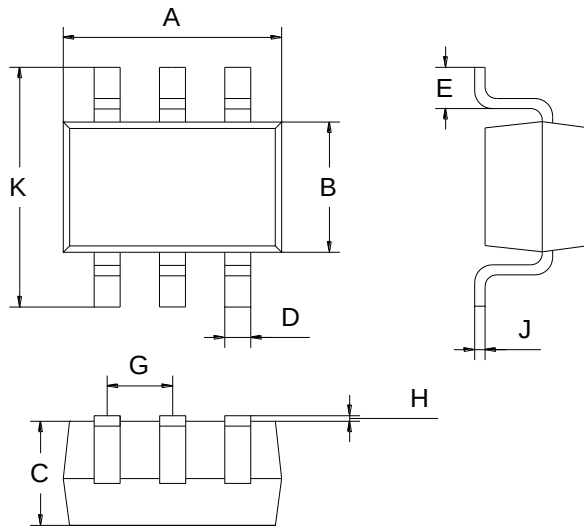

SOT-363		
Dimension	Min.	Max.
A	2.00	2.20
B	1.15	1.35
C	0.85	1.05
D	0.15	0.35
E	0.25	0.40
G	0.60	0.70
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40

Mounting Pad Layout (Unit: mm)

SOT-363

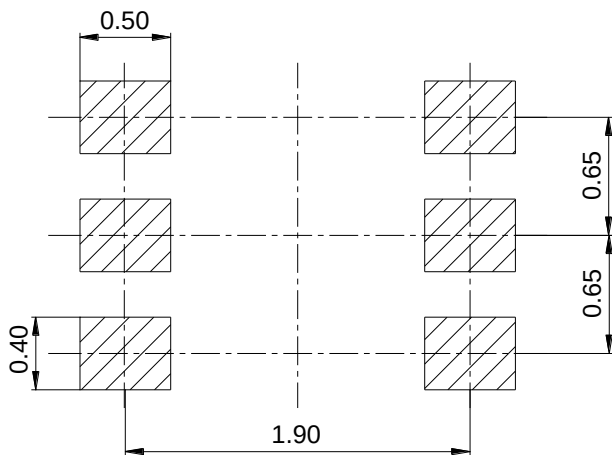

IMPORTANT NOTICE

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.